

(43) International Publication Date
27 September 2012 (27.09.2012)

- (51) **International Patent Classification:**
H04L 29/06 (2006.01) *H04L 12/26* (2006.01)
- (21) **International Application Number:**
PCT/IB2011/054788
- (22) **International Filing Date:**
26 October 2011 (26.10.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/466,372 22 March 2011 (22.03.2011) US
- (71) **Applicant (for all designated States except US):** TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; 164 83 Stockholm (SE).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** PANCORBO MARCOS, María Belén [ES/ES]; C/ Riscos de Polanco 8 3º A, ES-28035 Madrid (ES). SEGURA, Louis [CA/CA]; 1800 Guertin, Saint-Laurent, Québec H4L 4C8 (CA).
- (74) **Agents:** TUCKER, William, J. et al.; 6300 Legacy, MS EVR 1-C-11, Plano, TX 75024 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** NETWORK NODE AND METHOD TO CONTROL ROUTING OR BYPASSING OF DEPLOYED TRAFFIC DETECTION FUNCTION NODES

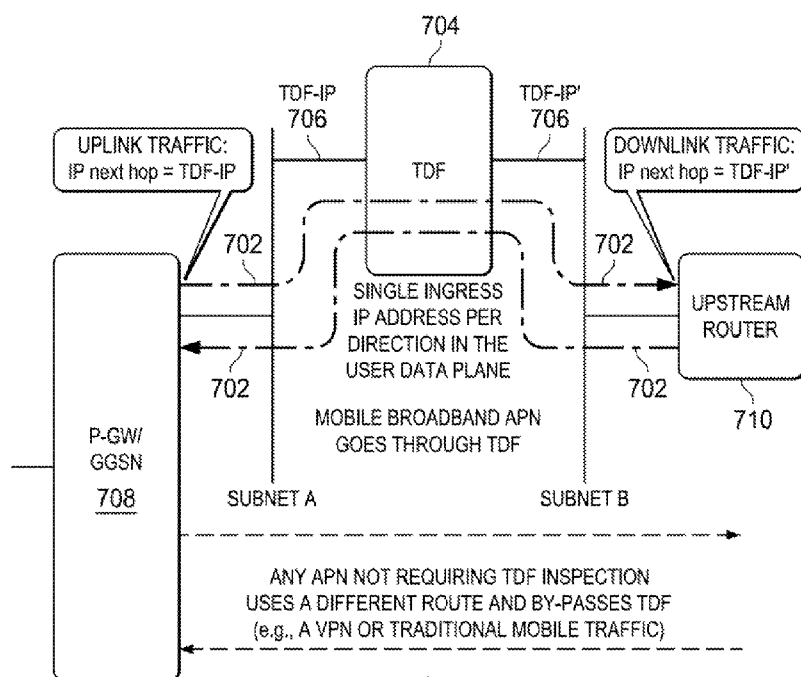


FIG. 7

(57) **Abstract:** A network is described herein which can control, through subscriber profile data and/or policy preconfigured control data, whether deep packet inspection for data flow/s for an Internet Protocol-Connectivity Access Network (IP-CAN) session established by an end user should take place, or not, according to a defined "User Privacy Policy", and, in the former case, to which traffic detection function (TDF) node the data flow(s) should be directed.