



(51) International Patent Classification:

B32B 13/02 (2006.01) *B28B 7/22* (2006.01)
B32B 13/04 (2006.01) *B28B 11/14* (2006.01)
B32B 18/00 (2006.01) *E04C 2/24* (2006.01)
B32B 37/00 (2006.01)

(21) International Application Number:

PCT/AU2012/000889

(22) International Filing Date:

27 July 2012 (27.07.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2011902985 27 July 2011 (27.07.2011) AU

(72) Inventor; and

(71) Applicant : **SADLER, William Alexander James**
[AU/AU]; 41 Quarry Road, Mitcham, Victoria 3132 (AU).

(74) Agent: **DAVIES COLLISON CAVE**; 1 Nicholson Street,
Melbourne, Victoria 3000 (AU).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: LAMINATED PRODUCT PRODUCED BY PLACING ONE LAYER ONTO A SEMI SET PARTIALLY CURED
BASE LAYER.

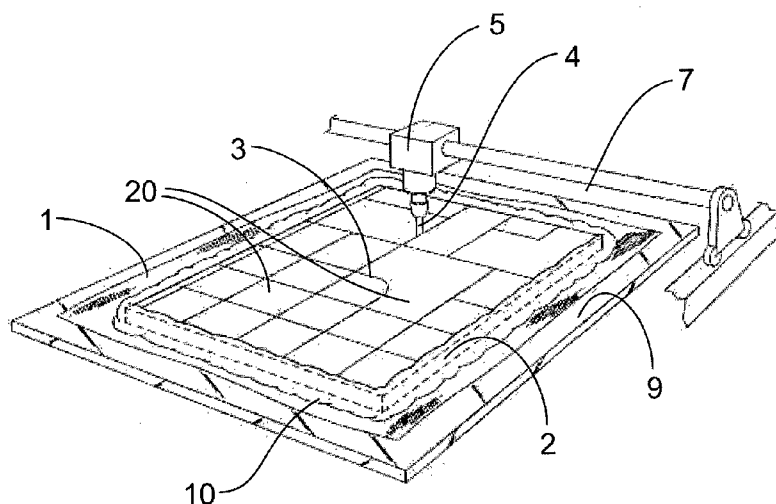


FIG. 1

(57) Abstract: A method for producing a laminated product including applying a slab product to at least one surface of a substrate, the method including placing the substrate onto the slab material when the slab product is in a semi set partially cured state, then allowing the laminated product to cure. Preferably the slab is cement based and the substrate is a masonry product, already manufactured and cured, eg tiles, mosaics, bench tops. The method may alternatively cast a cementitious slab first, and then when that is partially cured pour the cementitious substrate onto it, then cutting the whole assembly into smaller pieces while the whole assembly is still in a partially cured semi set state.