



(51) International Patent Classification:

H05K 1/02 (2006.01) *B32B 33/00* (2006.01)
B32B 25/18 (2006.01)

(21) International Application Number:

PCT/CA2013/001043

(22) International Filing Date:

17 December 2013 (17.12.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/738,707 18 December 2012 (18.12.2012) US

(71) Applicants: **LANXESS INC.** [CA/CA]; 1265 Vidal Street South, Sarnia, Ontario N7T 7M2 (CA). **THE UNIVERSITY OF WINDSOR** [CA/CA]; 401 Sunset Avenue, Windsor, Ontario N9B 3P4 (CA).

(72) Inventors: **FERRARI, Lorenzo**; 5426 Greer Drive, Burlington, Ontario L7L 7M8 (CA). **DAVIDSON, Gregory J. E.**; 19 Meadowridge Crescent, London, Ontario N6H 5G1

(CA). **CARMICHAEL, Tricia Breen**; 1085 Wallace Avenue, Windsor, Ontario N9G 3P4 (CA).

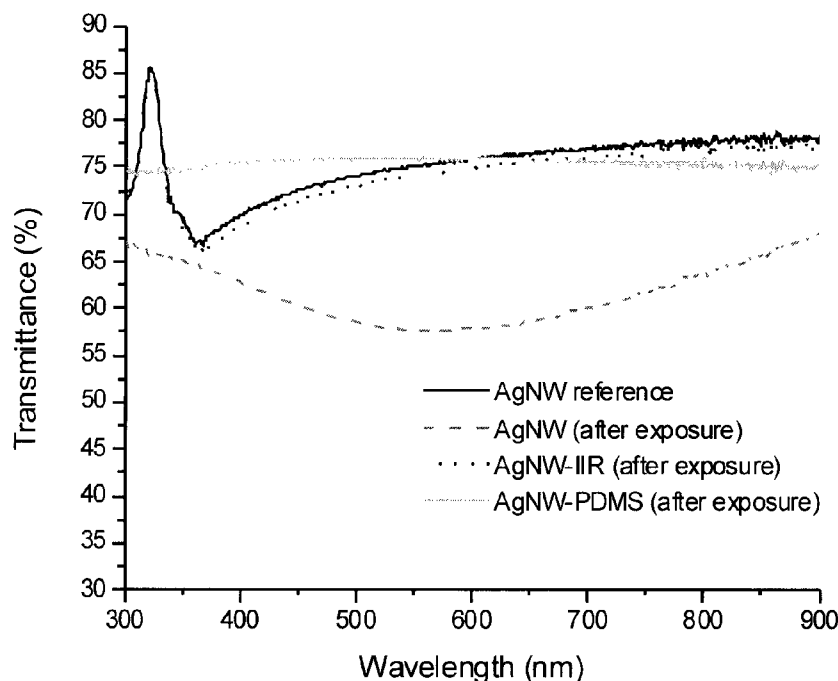
(74) Agent: **BRUNET, Robert A.H.**; c/o Brunet & Co. Ltd., 10712 Melrose Drive, Komoka, Ontario N0L 1R0 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: ELECTRONIC DEVICES COMPRISING BUTYL RUBBER

**Figure 7**

(57) Abstract: This invention relates to elastomeric coatings for electronics. Disclosed is a electronic device comprising a substrate layer, a conductive layer and an encapsulant layer. The encapsulant layer comprises at least a butyl rubber material. The butyl rubber encapsulant prevents a change in resistivity of the conductive layer following exposure to nitric acid vapour for 12 hours or hydrochloric acid vapour for 10 hours.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, **Published:**

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*