

(51) International Patent Classification:
G09G 5/22 (2006.01)(21) International Application Number:
PCT/US2011/025675(22) International Filing Date:
22 February 2011 (22.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/338,612 20 February 2010 (20.02.2010) US(71) Applicant (for all designated States except US):
OMEGA ENGINEERING, INC. [US/US]; One Omega Drive, P.O. Box 4047, Stamford, Connecticut 06907-0047 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HOLLANDER, Milton B.** [US/US]; 1 Arbor Road, Stamford, Connecticut 06903 (US). **MACCHIARELLI, Michael A.** [US/US]; 3 Shinnacock Trail, Shelton, Connecticut 06484 (US).(74) Agent: **KINNEY, Michael K.**; Michaud-Kinney Group LLP, 306 Industrial Park Road, Suite 206, Middletown, Connecticut 06457 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MULTI-MODE GRAPHIC DISPLAY FOR A TEST AND/OR MEASUREMENT DEVICE

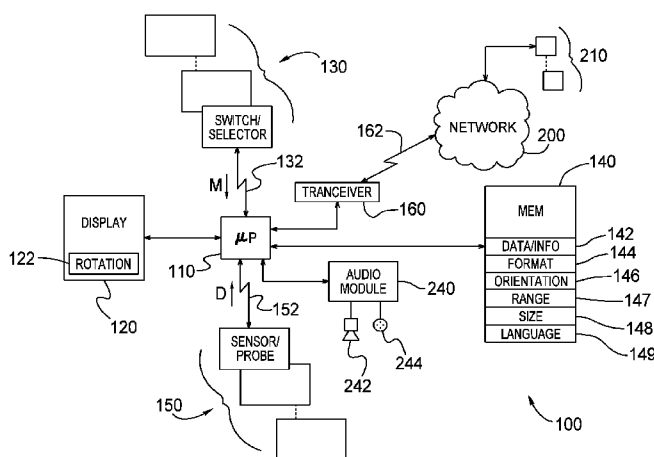


FIG. 2

(57) **Abstract:** A measurement device (100) includes a processor (110), one or more probes (150), one or more switches (130) and a multi-mode graphic display (120). The probes provide first signals (D) including measurement data and information to the processor. The switches provide second signals (M) indicating a desired one of a plurality of operational modes. The operational modes include a plurality of display modes (MODE 1 - MODE 15). The display is selectively configurable in response to the second signals to exhibit the measurement data and information received by the processor in the plurality of display modes. The display modes include a plurality of exhibition formats of text, graphics and images representing the received measurement data and information. The exhibition formats include one or more of a character size, color, brightness, location, orientation, language and value display type of the text, graphics and images representing the measurement data and information.