

sending CG configuration information for uplink and priority information of a transmission channel to a terminal, the CG configuration information, together with preset data retransmission information and a transmission failure situation, being used to determine a data retransmission method to be adopted in a case where a priority of the transmission channel is determined by the terminal according to the priority information

FIG. 1

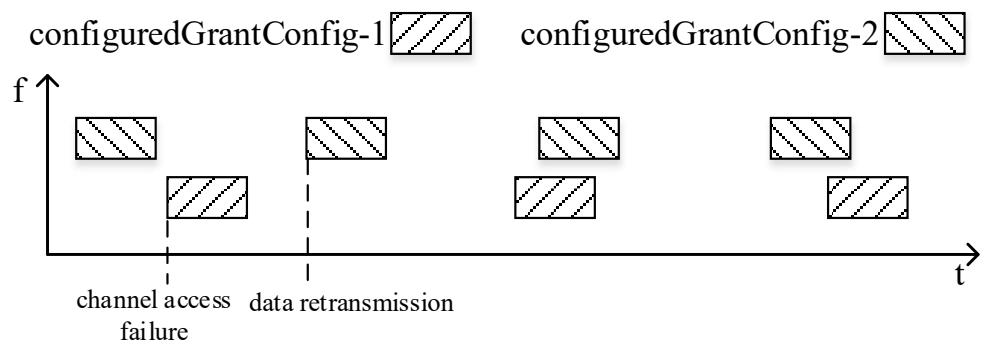


FIG. 2

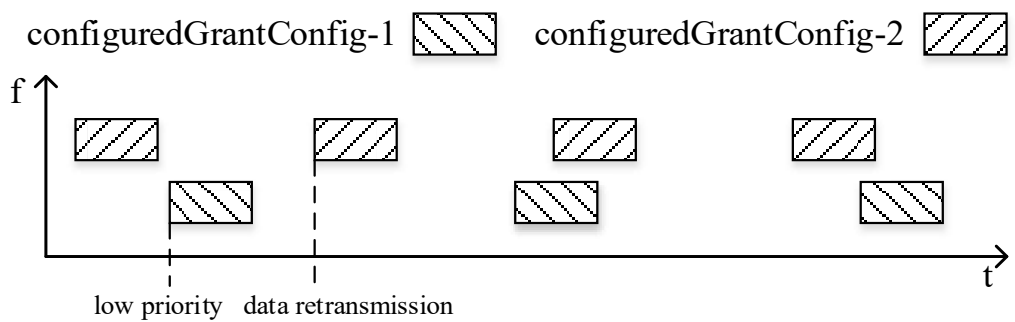


FIG. 3

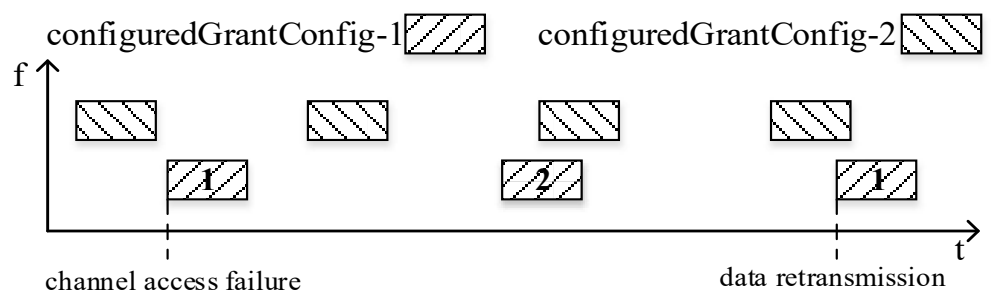


FIG. 4

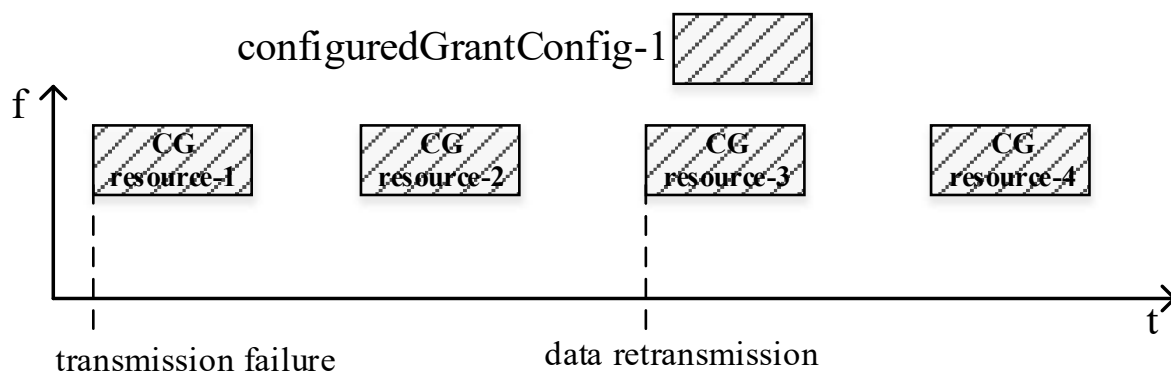


FIG. 5

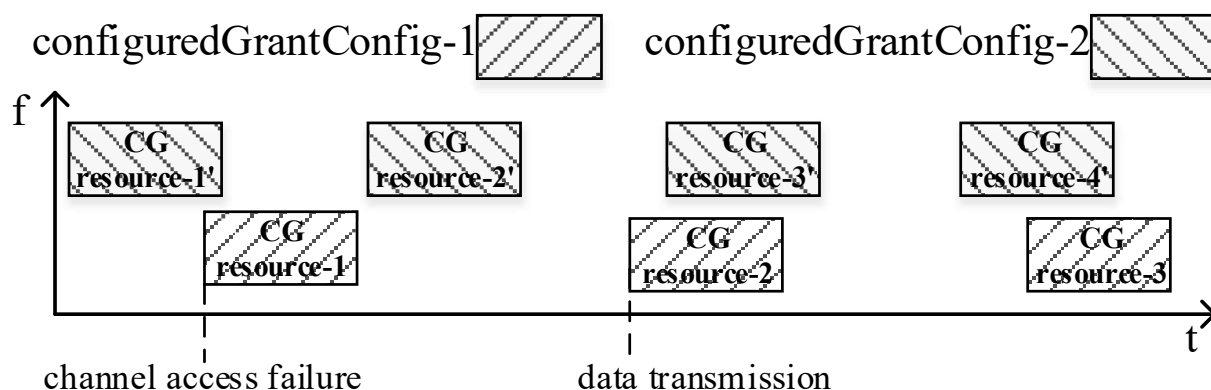


FIG. 6

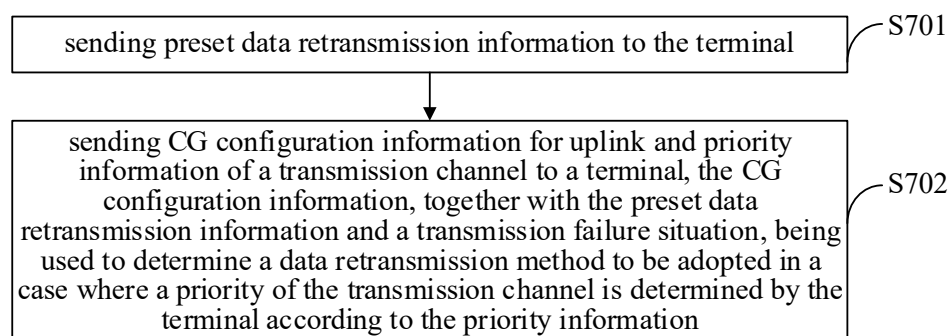


FIG. 7

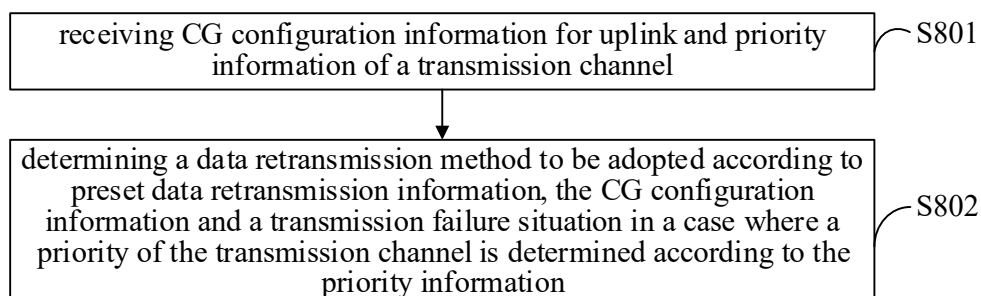


FIG. 8

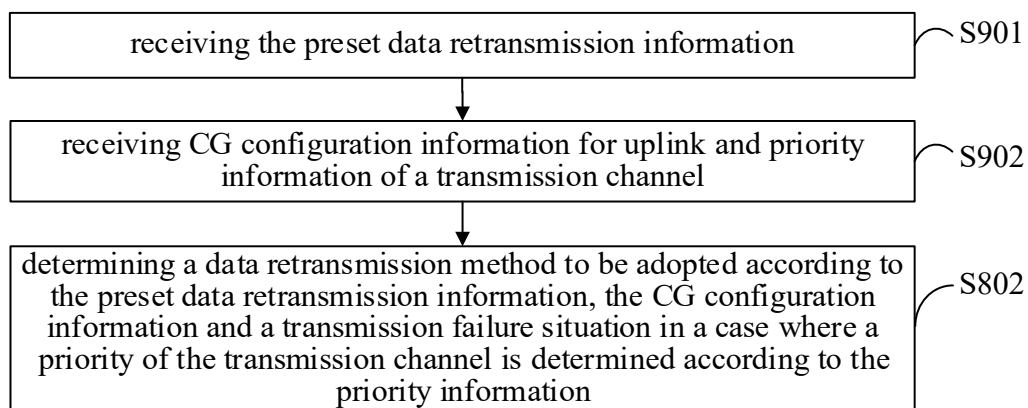


FIG. 9

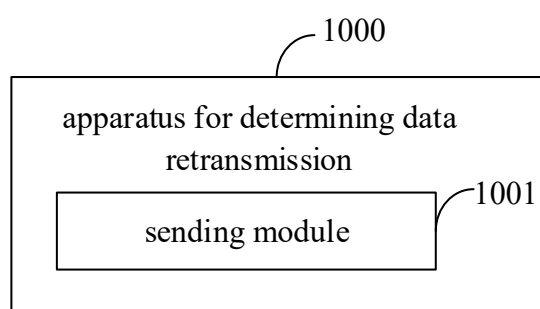


FIG. 10

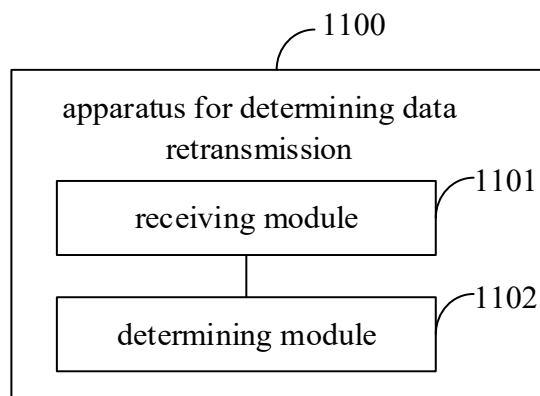


FIG. 11

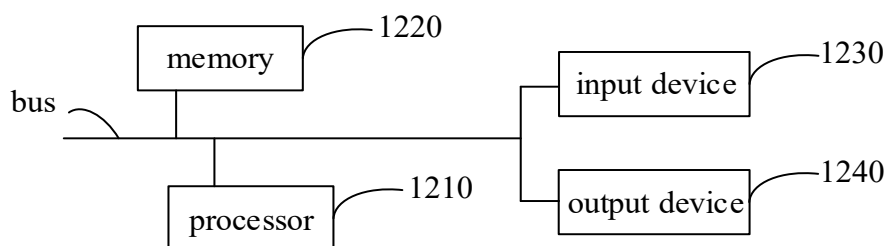


FIG. 12