

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
27 March 2025 (27.03.2025)



(10) International Publication Number
WO 2025/062019 A1

(51) International Patent Classification:

B65D 3/12 (2006.01) *B65D 3/14* (2006.01)
B65D 3/06 (2006.01) *B65D 3/22* (2006.01)

(21) International Application Number:

PCT/EP2024/076545

(22) International Filing Date:

20 September 2024 (20.09.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2314423.1	20 September 2023 (20.09.2023)	GB
2400757.7	19 January 2024 (19.01.2024)	GB
2407027.8	17 May 2024 (17.05.2024)	GB

(71) Applicant: **TRANSCEND PACKAGING LIMITED**


[GB/GB]; Ty Dyffryn, Dyffryn Business Park, 5a Alder Ave, Ystrad Mynach, Hengoed Wales CF82 7TW (GB).

(72) Inventor: **ANGELUCCI, Lorenzo**; Hengoed CF82 7TW (GB).

(74) Agent: **BRAND MURRAY FULLER LLP**; 50 Eastcastle Street, London Greater London W1W 8EA (GB).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,

(54) Title: FIBRE BASED PACKAGING CONTAINER, CIRCULAR BASE COMPONENT, QUADRILATERAL WALL BLANK, METHOD OF MANUFACTURE OF A FIBRE BASED PACKAGING CONTAINER AND CONTAINER OBTAINABLE FROM SAID METHOD

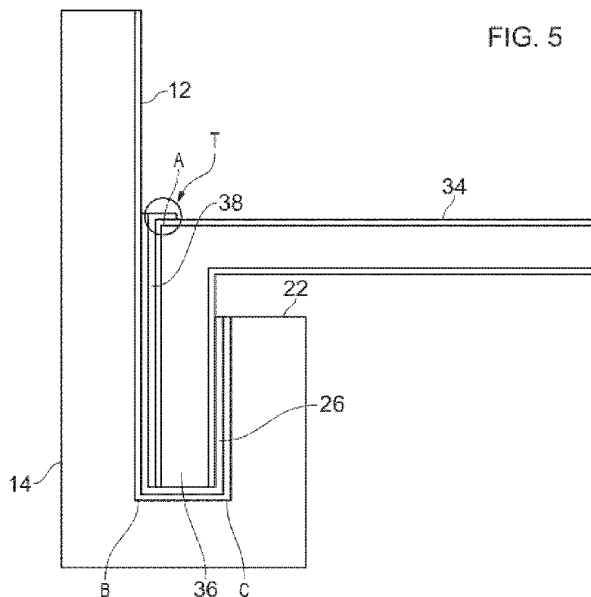

(57) Abstract: The present invention provides a fibre based packaging container for holding liquids, the packaging container comprising: a tubular wall component having an inner wall surface and an outer wall surface opposing the inner wall surface, the inner wall surface provided with a liquid impermeable layer and having a base sealing portion at one end of the tubular wall component; and a circular base component having an outer edge, an inner base surface and an outer base surface opposing the inner base surface, the inner base surface provided with a liquid impermeable layer and having: a circumferential region of the inner base surface, the circumferential region having a sealable lacquer coating, a fold line extending circumferentially around the inner base surface within the circumferential region of the inner base surface, and a wall sealing portion located on the inner base surface between the outer edge of the base and the

[Continued on next page]

RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

fold line, wherein the wall sealing portion is folded at 80 to 100 degrees about the fold line to form a folded portion, wherein the folded portion and at least a portion of the base sealing portion are sealed to one another to form a base seam and provide a three dimensional container form, such that the sealable lacquer coating is present within the base seam between the wall and base components.