



(51) International Patent Classification:

B65D 19/22 (2006.01) *B65D 19/00* (2006.01)
B65D 19/38 (2006.01) *B65D 19/34* (2006.01)

(21) International Application Number:

PCT/MY2013/000257

(22) International Filing Date:

16 December 2013 (16.12.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PI 2013700278 20 February 2013 (20.02.2013) MY

(71) Applicant: **DE FRAZER INTERNATIONAL SDN BHD**
[MY/MY]; 181-3, Jalan Lancang, Taman Sri Bahtera,
56000 Kuala Lumpur (MY).

(72) Inventor: **NG, Siang Ling**; 181-3, Jalan Lancang, Taman
Sri Bahtera, 56000 Cheras W.P. Kuala Lumpur (MY).

(74) Agent: **LOK, Choon Hong**; No. 19, Jalan SS 1/36, 47300
Petaling Jaya, Selangor (MY).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A REINFORCED PALLET

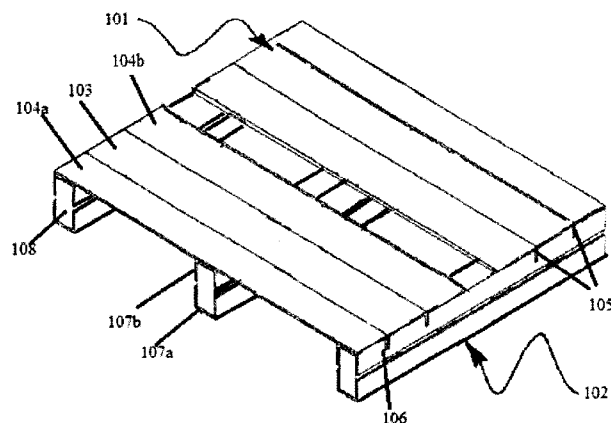


Figure 1

(57) Abstract: The present invention discloses a pallet comprising a plurality of elongate base members (102) being spaced apart from one another at its long edges with a plurality of block structures (108) arranged one by one within and along the long edges of each base member (102) that the base member (102) carries a plurality of paired slits (106) and each slit (106) cuts into every block structure (108) at a predetermined length; and a plurality elongate deck units (101) perpendicularly disposed on top of the base members that each deck unit is defined by a first construct (103), with an n-shaped cross-sectional profile, sandwiched in between a pair of second constructs (104), with an inverted L-shaped cross-sectional profile, and each deck unit (101) has a conjoined horizontal flat surface and a pair of downwardly extending portions (105) formed by the contiguous first (103) and second constructs (104); wherein the paired vertical extending portions (105) of each deck unit (101) are slotted into the aligned paired slits (106) of each block structure (108) to link all the base members (102) with the deck units (101) together while the horizontal flat surface serves as a work surface.

