



(43) International Publication Date
13 December 2012 (13.12.2012)

- (51) International Patent Classification:
F41H 3/00 (2006.01)
- (21) International Application Number:
PCT/SE2012/050596
- (22) International Filing Date:
4 June 2012 (04.06.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1150518-7 7 June 2011 (07.06.2011) SE
- (71) Applicant (for all designated States except US): **BAE SYSTEMS HÄGGLUNDS AKTIEBOLAG** [SE/SE]; S-891 82 Örnköldsvik (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SJÖLUND, Peder** [SE/SE]; Karosserivägen 3, S-891 41 Örnköldsvik (SE).
- (74) Agent: **ALBIHNS.ZACCO AB**; P.O. Box 5581, Valhallavägen 117, S-114 85 Stockholm (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) Title: DEVICE AND METHOD FOR SIGNATURE ADAPTATION AND AN OBJECT WITH SUCH A DEVICE

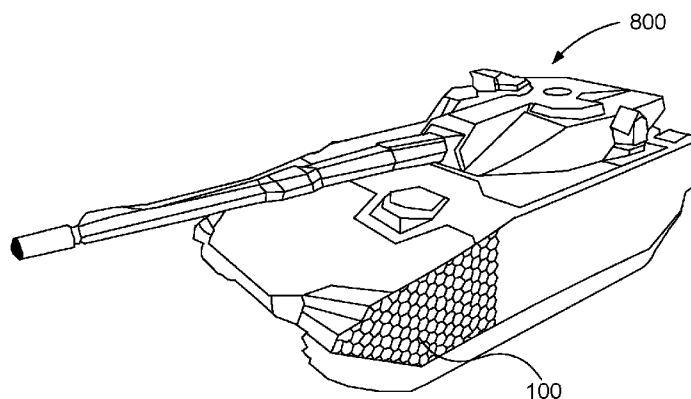


Fig. 3a

(57) Abstract: The invention pertains to a device for signature adaptation, comprising at least one surface element (100; 300; 500) arranged to assume a determined thermal distribution, wherein said surface element comprises at least one temperature generating element (150; 450a, 450b, 450c) arranged to generate at least one predetermined temperature gradient to a portion of said at least one surface element. Said surface element (100; 300; 500) comprising at least one display surface (50), wherein said display surface (50) is arranged to radiate at least one predetermined spectrum. The invention also pertains to a method for signature adaptation and an object such as a craft provided with the device according to the invention.



WO 2012/169954 A1