




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04Q 7/38, 11/04, 3/72		A1	(11) International Publication Number: WO 00/51387
			(43) International Publication Date: 31 August 2000 (31.08.00)
(21) International Application Number: PCT/IB00/00229 (22) International Filing Date: 24 February 2000 (24.02.00) (30) Priority Data: 9904181.6 24 February 1999 (24.02.99) GB 9906756.3 24 March 1999 (24.03.99) GB 9908847.8 19 April 1999 (19.04.99) GB (71) Applicant (for all designated States except US): NOKIA MOBILE PHONES LIMITED [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): HONKO, Harri [FI/FI]; Tuomiokirkonkatu 38 C 17, FIN-33100 Tampere (FI). HARMOVAARA, Matti [FI/FI]; Kellonsoittajankatu 15 b 4, FIN-20500 Turku (FI). (74) Agents: JEFFERY, Kendra et al.; Nokia IPR Department, Nokia House, Summit Avenue, Farnborough, Hampshire GU14 0NG (GB).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	



G00001

(54) Title: TELECOMMUNICATION SERVICES IDENTIFICATION IN A GATEWAY

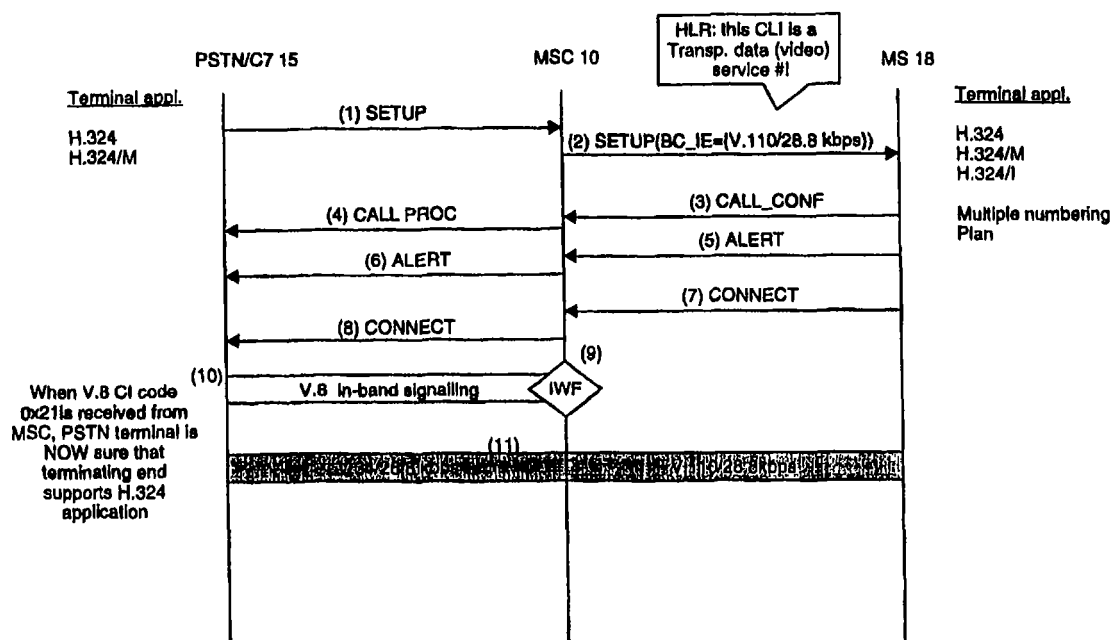

(57) Abstract

A method and apparatus are disclosed for identifying telecommunications services. The apparatus enables call establishment between a terminal of an originating analogue network and a terminal of a digital terminating network. It comprises an input for receiving call identification information in a first format from the originating network, means for reformatting received call identification information into a second format, output means for outputting the call identification information in the second format over the terminating network; and connection means for completing an appropriate connection between the terminals.



162162