



(51) International Patent Classification:  
*F25B 1/10* (2006.01) *F25B 9/00* (2006.01)

(21) International Application Number:  
PCT/US2011/021685

(22) International Filing Date:  
19 January 2011 (19.01.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
61/296,661 20 January 2010 (20.01.2010) US

(71) Applicant (for all designated States except US): **CARRIER CORPORATION** [US/US]; One Carrier Place, Farmington, CT 06034 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HUFF, Hans-Joachim** [DE/US]; 7721 Farley Lane, Manlius, New York 13104 (US).


(74) Agent: **HABELT, William, W.**; Cantor Colburn LLP, 20 Church Street, 22nd Floor, Hartford, CT 06103 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: REFRIGERATION STORAGE IN A REFRIGERANT VAPOR COMPRESSION SYSTEM

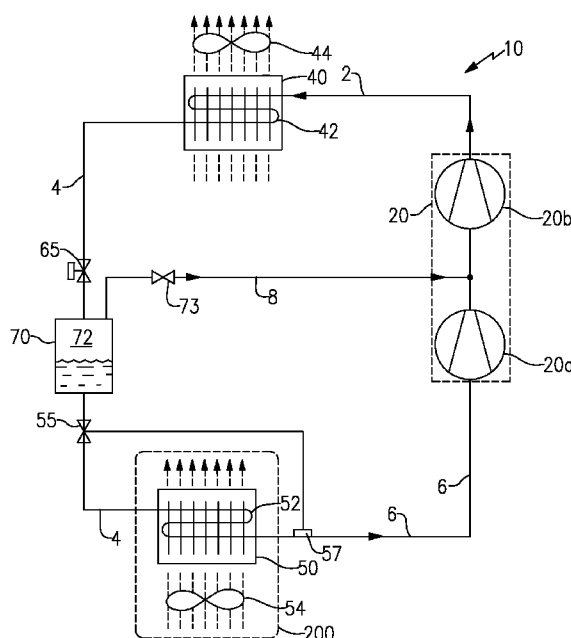

**FIG.1**

(57) Abstract: A refrigerant vapor compression system (10) includes a plurality of components, including a flash tank (70), connected in a refrigerant flow circuit by a plurality of refrigerant lines (2, 4, 6, 8). The system internal volume equals to the sum of the internal volumes of the plurality of components and the internal volume of the plurality of refrigerant lines. The internal volume of the flash tank ranges from at least 10% to about 30% of the total system internal volume.

**Published:****(88) Date of publication of the international search report:**

12 January 2012

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*