

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
27 January 2022 (27.01.2022)



(10) International Publication Number
WO 2022/019881 A1

- (51) **International Patent Classification:**
E21B 43/12 (2006.01) *E21B 34/08* (2006.01)
- (21) **International Application Number:**
PCT/US2020/042772
- (22) **International Filing Date:**
20 July 2020 (20.07.2020)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
16/933,347 20 July 2020 (20.07.2020) US
- (71) **Applicant:** **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032-3219 (US).
- (72) **Inventors:** **MCCHESNEY, Ryan Wesley**; 2017 Overton Park Drive, Prosper, Texas 75078 (US). **MCLEARY, Gordon**; 5225 Verde Valley Lane Apt. 305, Dallas, Texas 75254 (US).
- (74) **Agent:** **PARKER, Greg H.** et al.; Parker Justiss, P.C., 14241 Dallas Parkway, Suite 620, Dallas, Texas 75254 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) **Title:** INTERNALLY ADJUSTABLE FLOW CONTROL MODULE

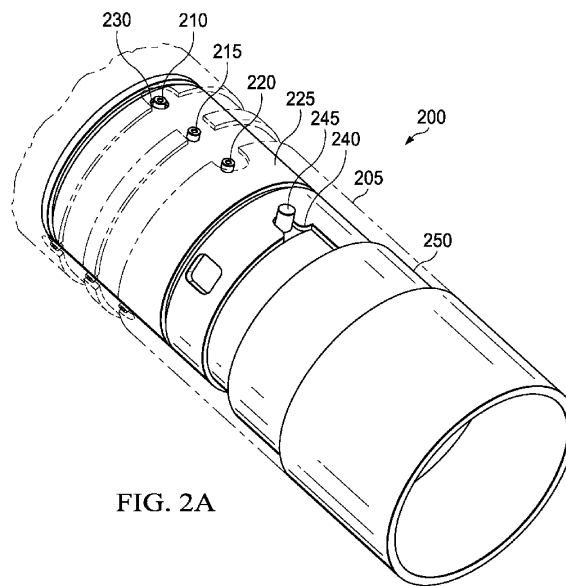


FIG. 2A

(57) **Abstract:** Disclosed herein are embodiments of an adjustable flow control device. In one embodiment, the flow control device comprises a base pipe having one or more openings extending from an exterior to an interior of the base pipe; and a movable sleeve positioned along the interior of the base pipe, the movable sleeve having one or more associated openings extending from an exterior to an interior of the movable sleeve, and configured to rotate to a first position that aligns a first of the base pipe openings with a first of the movable sleeve openings.

[Continued on next page]

WO 2022/019881 A1

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*