

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number
WO 2004/090917 A1

(51) International Patent Classification⁷: **H01F 27/04**

(21) International Application Number:
PCT/EP2004/050452

(22) International Filing Date: 6 April 2004 (06.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
MI2003A000678 7 April 2003 (07.04.2003) IT

(71) Applicant (for all designated States except US):
CEDASPE S.P.A. [IT/IT]; Via Colombara 1, I-20098
SAN GIULIANO MILANESE (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GIORGI, Gian
Franco** [IT/IT]; Via Amadeo 3, I-20133 MILAN (IT).


(74) Agent: **GERVASI, Gemma**; NOTARBARTOLO & GER-
VASI S.p.A., Corso di Porta Vittoria 9, I-20122 MILAN
(IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: BUSHING FOR TRANSFORMERS

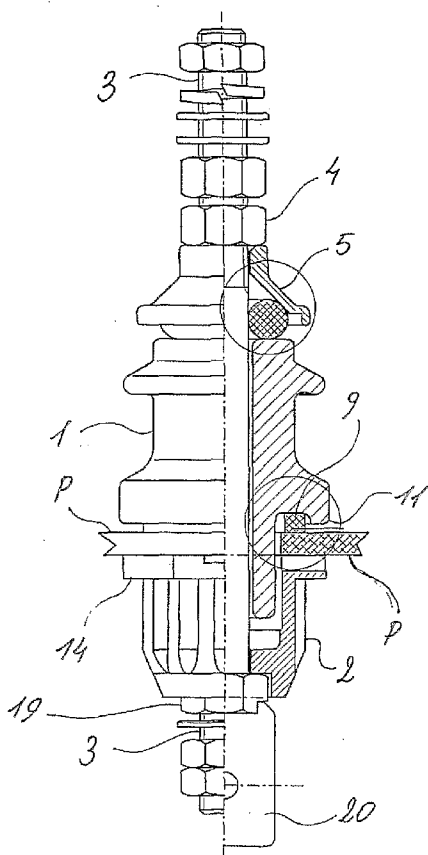

(57) Abstract: The bushing comprises a first annular gasket (9) with convex quadrangular section, inserted in the annular groove (10) which, together with the annular protecting edge (11), protects the gasket from the sunlight and prevents excessive radial expansion of the compressed gasket (9) towards the outside. In this way deterioration of the gaskets (7) and (9) is reduced. The bushing also comprises a second annular gasket (7) tightly packed between the ceramic body (1) and the outer second body (5) which defines a slanting surface (6) and a second annular protecting edge (8), which serve to protect the gasket (7) from the sunlight. The slanting surface (6) compresses the gasket (7) providing a stop against both the pin (3) and the ceramic body (1), and limits excessive radial expansion of the compressed gasket towards the outside.



GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.