



(51) International Patent Classification:
E21B 15/02 (2006.01) *E21B 7/128* (2006.01)

(21) International Application Number:
PCT/US2011/029426

(22) International Filing Date:
22 March 2011 (22.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/403,248 13 September 2010 (13.09.2010) US
61/454,867 21 March 2011 (21.03.2011) US

(72) Inventor; and

(71) Applicant : **MAGNUSON, Christopher** [US/US]; 8911
Cote Court, Houston, Texas 77064 (US).

(74) Agent: **WESTBY, Timothy S.**; Porter Hedges LLP, 1000
Main St., Suite 3600, Houston, Texas 77002 (US).


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, — with international search report (Art. 21(3))

(54) Title: MULTI-OPERATIONAL MULTI-DRILLING SYSTEM

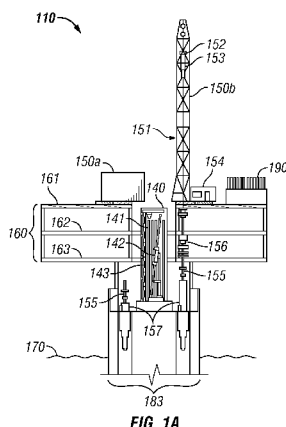

(57) Abstract: A system including a setback and racking system and a set of wellbay accesses, at least a portion of the setback and racking system positioned at an elevation lower than the elevation of the wellbay accesses. A system including a centrally located setback and racking system, a set of wellbay accesses, and at least one peripheral skidding system, wherein the setback and racking system is positioned at least partially below the elevation of the peripheral skidding system. A system including at least one peripheral skidding system and a set of wellbay accesses positioned along a wellbay access perimeter surrounding a central focus that is not an integral part of the peripheral skidding system. A method of drilling by aligning each of at least two drilling modules with a respective wellbay access via a peripheral skidding system and operating at least two drilling modules at least partially simultaneously.