

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
6 November 2008 (06.11.2008)(10) International Publication Number
WO 2008/133879 A9(51) International Patent Classification:
H05B 37/02 (2006.01)

(21) International Application Number:

PCT/US2008/005187

(22) International Filing Date:

23 April 2008 (23.04.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/925,782	23 April 2007 (23.04.2007)	US
61/016,027	21 December 2007 (21.12.2007)	US
12/106,614	21 April 2008 (21.04.2008)	US

(71) Applicant (for all designated States except US):
LUTRON ELECTRONICS CO., INC. [US/US]; 7200
Suter Road, Coopersburg, Pennsylvania 18036 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STEINER, James P.** [US/US]; 68 Major Road, Royersford, Pennsylvania 19468 (US). **CYRIL, Baby** [FR/US]; 1801 Butler Pike, Apt. 144, Conshohocken, Pennsylvania 19428 (US). **BUCK, Christopher** [US/US]; 522 Main Street, Bethlehem, Pennsylvania 18018 (US). **CARMEN, Daniel F.** [US/US]; 4926 Clauss Road, Schnecksyville, Pennsylvania 18078 (US).(74) Agents: **DUJMICH, Louis, C.** et al.; Ostrolenk, Faber,
Gerb & Soffen LLP, 1180 Avenue of the Americas, New
York, New York 10036 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,
EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG,
US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: MULTIPLE LOCATION LOAD CONTROL SYSTEM

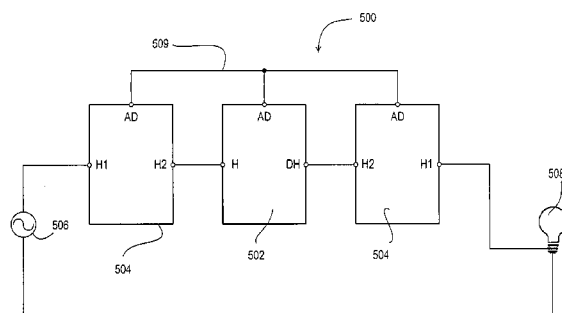


Fig. 5

(57) Abstract: A multiple location load control system comprises a main device and remote devices, which do not require neutral connections, but allow for visual and audible feedback at the main device and the remote devices. The main device and the remote devices are adapted to be coupled in series electrical connection between an AC power source and an electrical load, and to be further coupled together via an accessory wiring. The remote devices can be wired on the line side and the load side of the load control system, such that the main device is wired 'in the middle' of the load control system. The main device is operable to enable a charging path to allow the remote devices to charge power supplies through the accessory wiring during a first time period of a half-cycle of the AC power source. The main device and the remote devices are operable to communicate with each other via the accessory wiring during a second time period of the half-cycle.



(88) Date of publication of the international search report:
18 December 2008

(15) Information about Correction:
see Notice of 13 August 2009

(48) Date of publication of this corrected version:
13 August 2009