

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



PCT



(10) 国际公布号

WO 2011/097942 A1

(43) 国际公布日
2011 年 8 月 18 日 (18.08.2011)

- (51) 国际专利分类号:
G06F 1/16 (2006.01)
- (21) 国际申请号: PCT/CN2011/000063
- (22) 国际申请日: 2011 年 1 月 14 日 (14.01.2011)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (30) 优先权:
201010109152.7 2010 年 2 月 11 日 (11.02.2010) CN
- (72) 发明人; 及
- (71) 申请人: 陈亮合 (CHENG, Liang Ho) [CN/CN]; 中国台湾省桃园县中坜市吉林路 129 巷 65 号, Taiwan (CN)。
- (74) 代理人: 天津三元专利商标代理有限责任公司 (TIANJIN SANYUAN PATENT & TRADEMARK AGENCY, LTD.); 中国天津市河西区气象台路 70 号余 2 门 602 号, Tianjin 300074 (CN)。
- (81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB,

BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。

- (84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)。

根据细则 4.17 的声明:

- 关于申请人有权申请并被授予专利(细则 4.17(ii))

[见续页]

(54) Title: UPRIGHT COMPUTER HOST

(54) 发明名称: 直立式电脑主机

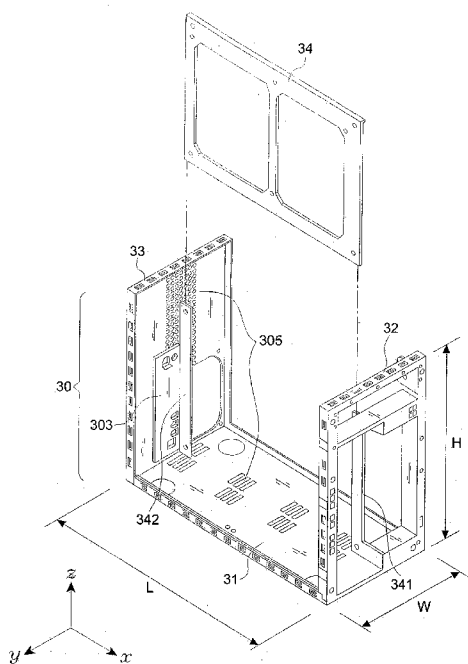


图 9A / Fig. 9A

(57) Abstract: An upright computer host includes: an upright base-box, which includes a $\sqsubset$ type body formed by a bottom surface, a front and a back frame; a bearing and assembling component, which is set at the middle section of a width plane of the upright base-box, and is connected to the inner sides of the front and the back frame to form an upright combining plate so as to provide a preset plate with a vertical upright fixed location performed as a vertical corresponding line formed through the connection of the combining plate of the bearing and assembling component from the front frame to the back frame, to separate the transverse width plane of the upright base-box to a first assembling room with a left opening and a second assembling room with a right opening; a first electrical connection port hole, which is uprightly set on the back frame near the bearing and assembling component and in the space of the first assembling room. The length and height of the host body can be properly reduced in the present solution to improve the bearing and assembling capacity of the computer cabinet, to improve the convenience of the installation and the extension update, and to enhance the efficiency of heat dissipation with separated wind fields.

[见续页]

WO 2011/097942 A1