

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(43) 国际公布日
2011 年 12 月 1 日 (01.12.2011)

PCT

(10) 国际公布号
WO 2011/147318 A1

- (51) 国际专利分类号:
F04F 5/16 (2006.01) *F04D 25/08* (2006.01)
- (21) 国际申请号: PCT/CN2011/074668
- (22) 国际申请日: 2011 年 5 月 25 日 (25.05.2011)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (30) 优先权:
201020205107.7 2010 年 5 月 27 日 (27.05.2010) CN
201020224739.8 2010 年 6 月 12 日 (12.06.2010) CN
201020519265.x 2010 年 9 月 7 日 (07.09.2010) CN
201020536812.5 2010 年 9 月 20 日 (20.09.2010) CN
- (72) 发明人: 及
- (71) 申请人: 李德正 (LI, Dezheng) [CN/CN]; 中国广东省南雄市雄州镇小攸关电力苑 D 栋 401 室, Guangdong 512400 (CN)。
- (74) 代理人: 深圳市睿智专利事务所 (SHENZHEN RUIZHI PATENT AGENCY); 中国广东省深圳市南山区科技园科苑路 6 号科技大厦中 501A, Guangdong 518057 (CN)。
- (81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。
- (84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)。
- 本国际公布:
— 包括国际检索报告(条约第 21 条(3))。
— 包括经修改的权利要求(条约第 19 条(1))。

[见续页]

(54) Title: DEVICE FOR BLOWING AIR BY MEANS OF NARROW SLIT NOZZLE ASSEMBLY

(54) 发明名称: 借助窄缝喷嘴组件送风的装置

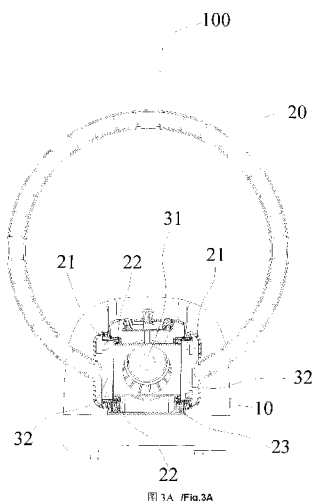


图 3A /Fig.3A

(57) Abstract: A device for blowing air by means of a narrow slit nozzle assembly (20) is provided. The device comprises a base seat (10) for generating air stream to supply air flow and a narrow slit nozzle assembly (20) supported by the base seat (10) for blowing air. An airflow passage is connected between the base seat (10) and the nozzle assembly (20). An intake end of the airflow passage is opened on the outer surface of the base seat (10), and an output end is connected to the nozzle assembly (20) by means of a pivot component (21). An intake end of the nozzle assembly (20) is connected to an output end of the base seat (10) by means of the pivot component (21). An impeller (13) and an electric motor (12) for driving the impeller (13) to rotate are provided in the base seat (10). The nozzle assembly (20) is rotatably fixed on the base seat (10) by means of the pivot component (21). The rotation direction of the nozzle can be adjusted by the rotation of the pivot component around the airflow passage. And when the fan is idle, the nozzle can be folded so as to save the space.

[见续页]

WO 2011/147318 A1