



(51) International Patent Classification:
H02K 3/24 (2006.01)

(21) International Application Number:
PCT/US2009/058118

(22) International Filing Date:
23 September 2009 (23.09.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/194,098 23 September 2008 (23.09.2008) US
61/194,056 23 September 2008 (23.09.2008) US
61/194,099 23 September 2008 (23.09.2008) US

(71) Applicant (for all designated States except US):
AEROVIRONMENT, INC. [US/US]; 181 W. Hunting-
ton Drive, Suite 202, Monrovia, CA 91016 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RIPPEL, Walley**
[US/US]; 3308 Alegre Lane, Altadena, CA 91001 (US).
DABOUSSI, Zaher [US/US]; 825 Arcadia Avenue #12,
Arcadia, CA 91007-7226 (US). **HIBBS, Bart** [US/US];
2691 Daunet Avenue, Simi Valley, CA 93065 (US).
SHEPPARD, Lindsay [US/US]; 432 South Angeleno
Avenue, Azusa, CA 91702 (US).

(74) Agent: **BALZAN, Christopher, R.**; 674 County Square
Drive, Suite 105, Ventura, CA 93003 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: STATOR WINDING HEAT SINK CONFIGURATON

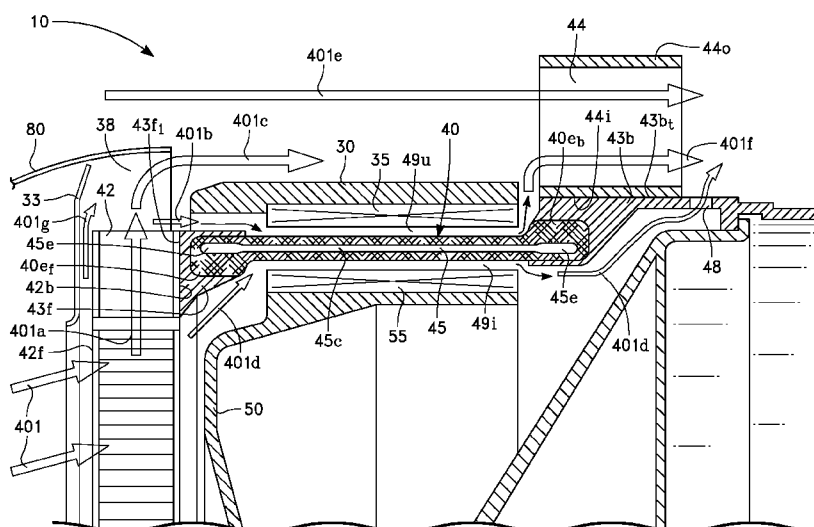


FIG. 4

(57) Abstract: In one possible implementation, a motor is provided including a rotor and a stator. Front cooling fins are thermally coupled to a front of the stator, and rear cooling fins are thermally coupled to a rear portion of the stator. The winding is between the front and rear cooling fins.