

FIG. 1

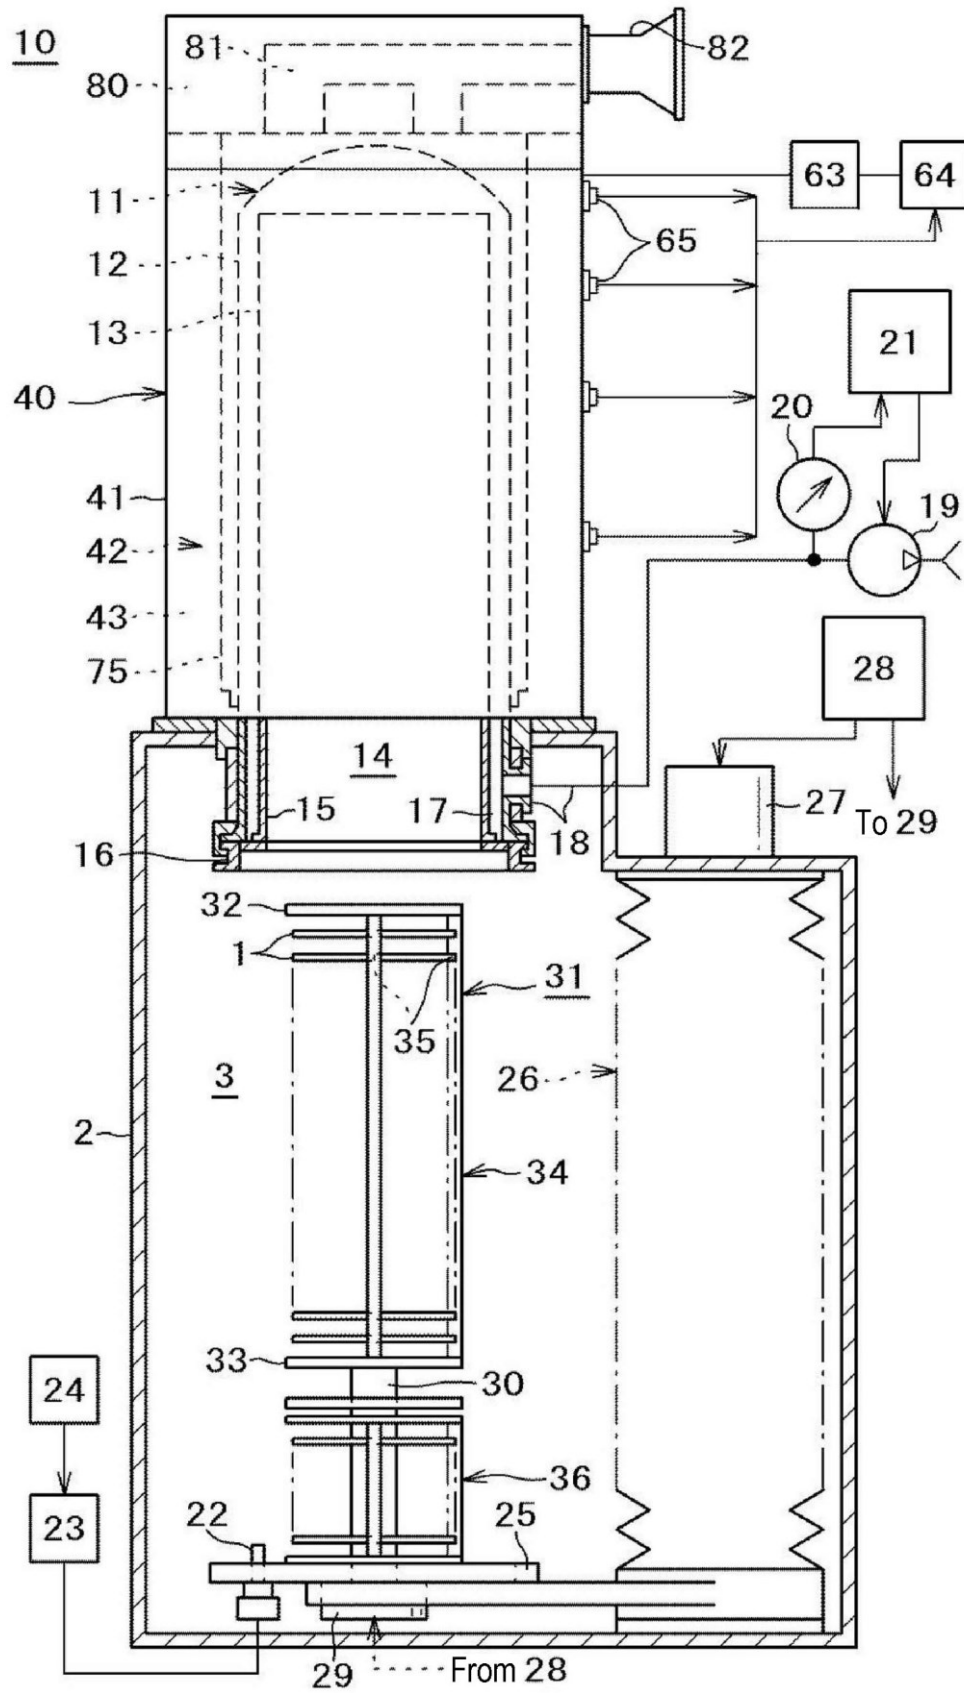


FIG. 2

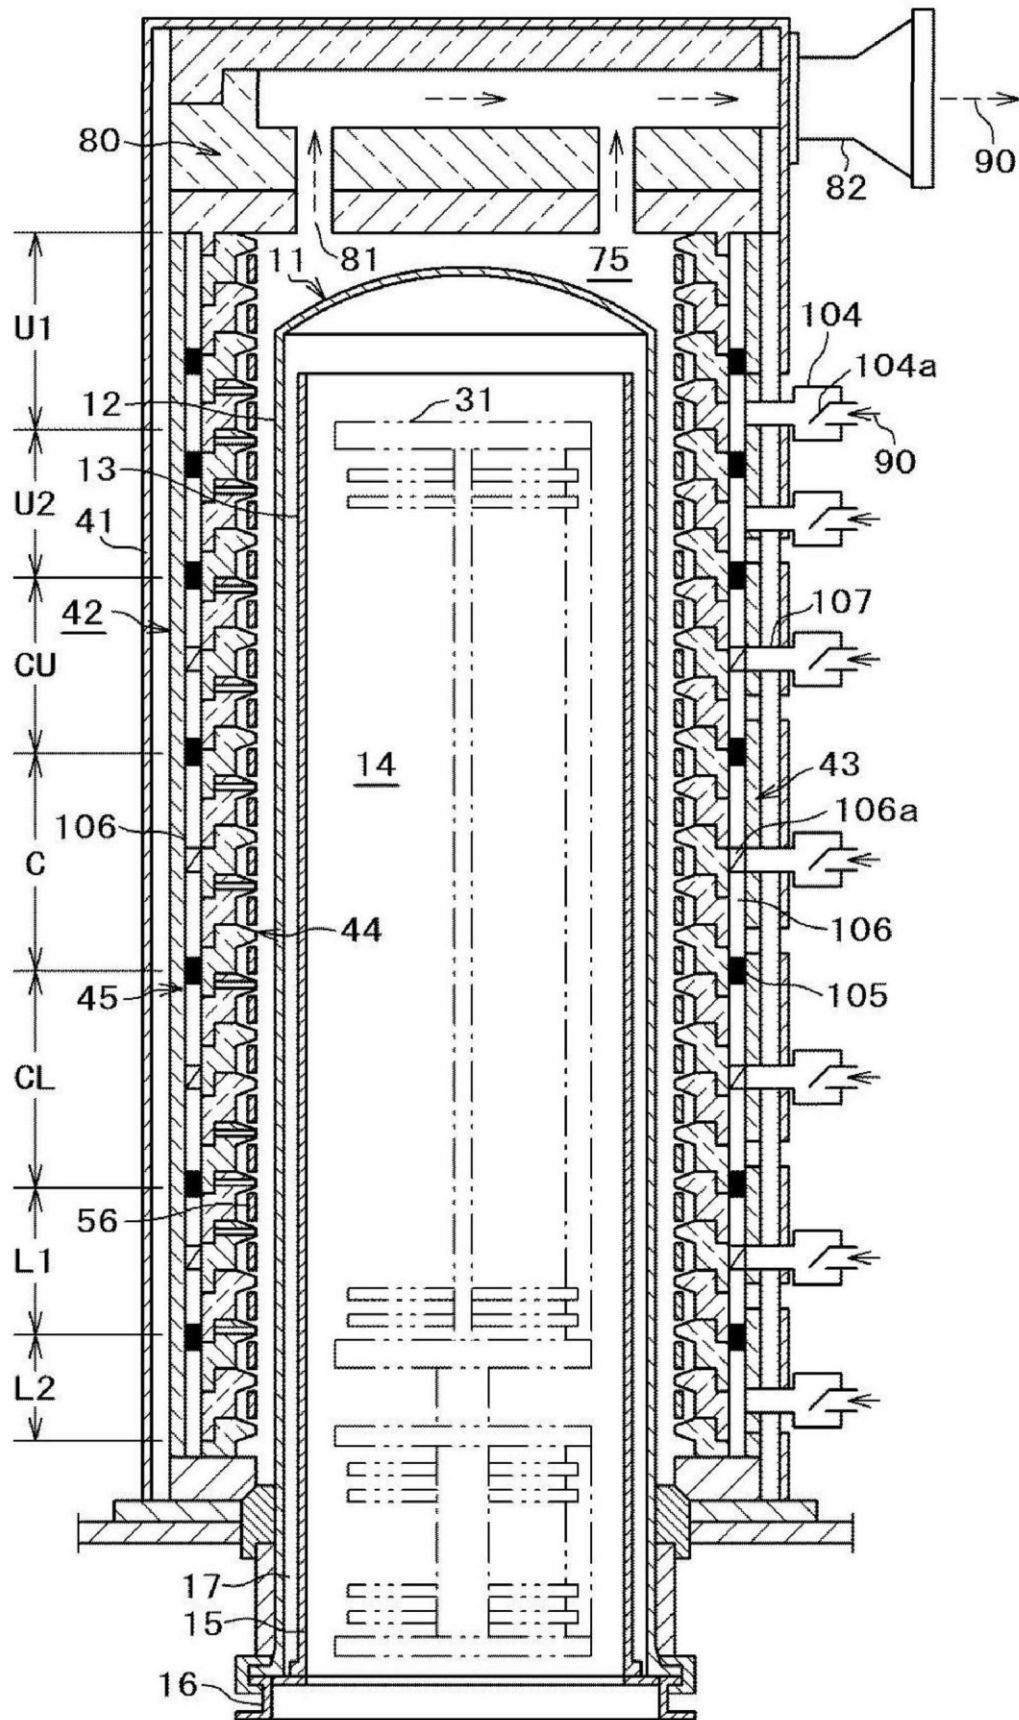


FIG. 3

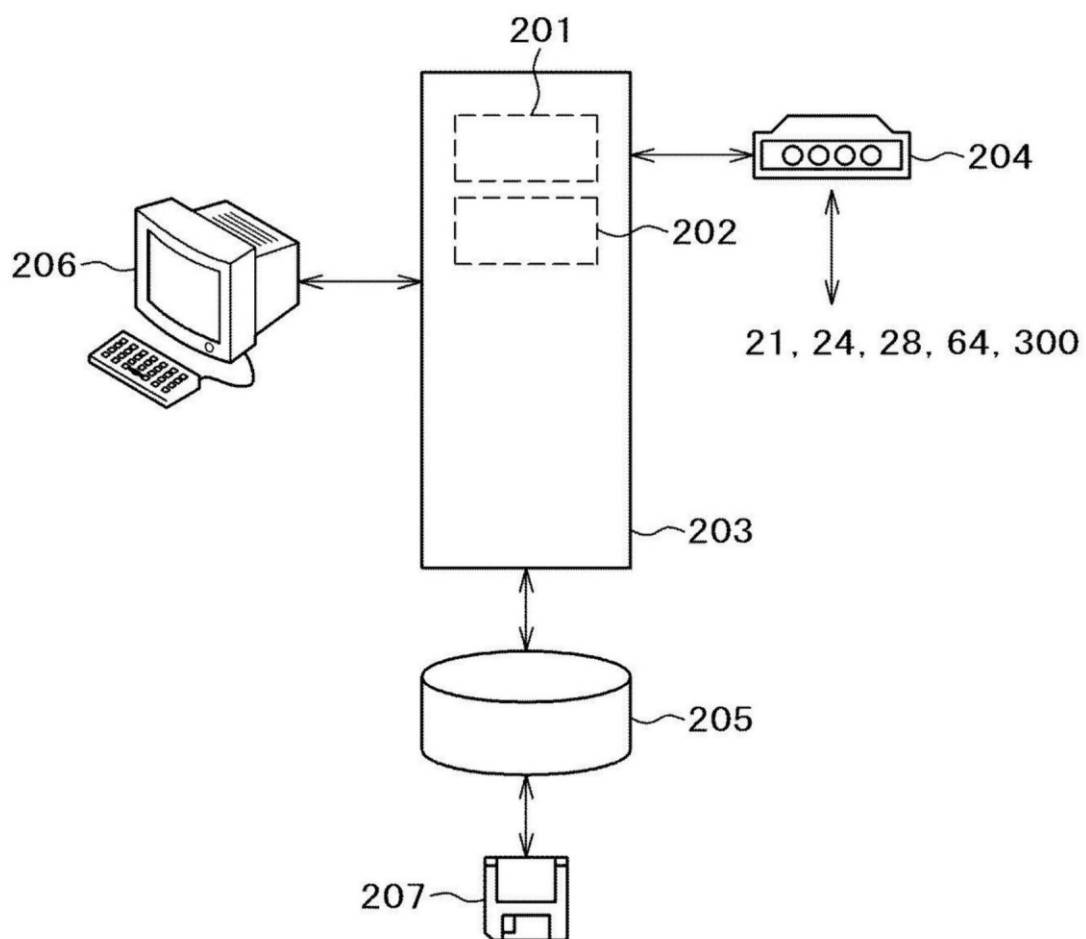
200

FIG. 4

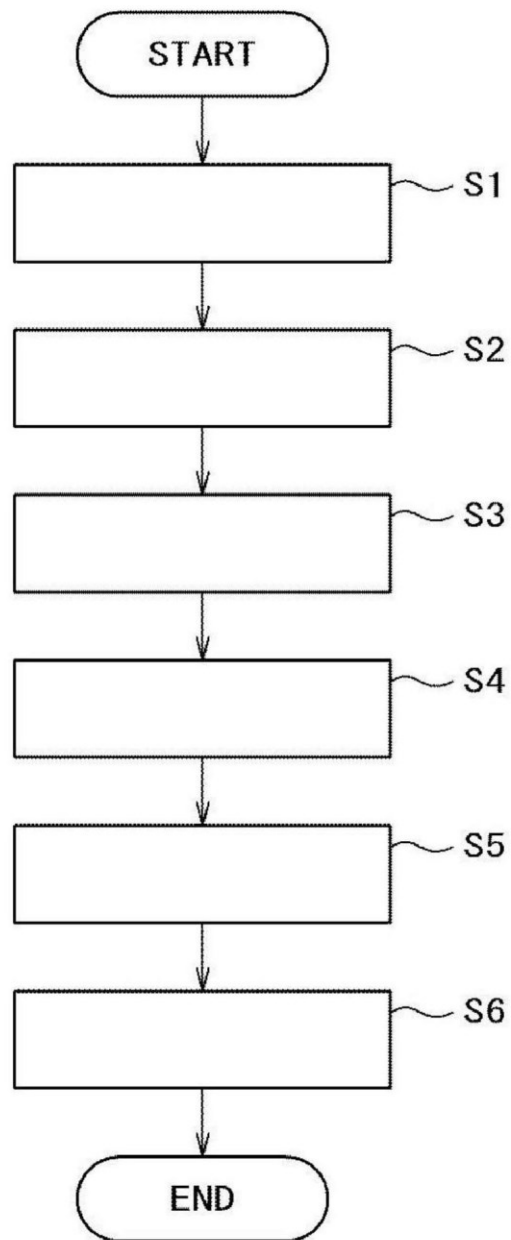


FIG. 5

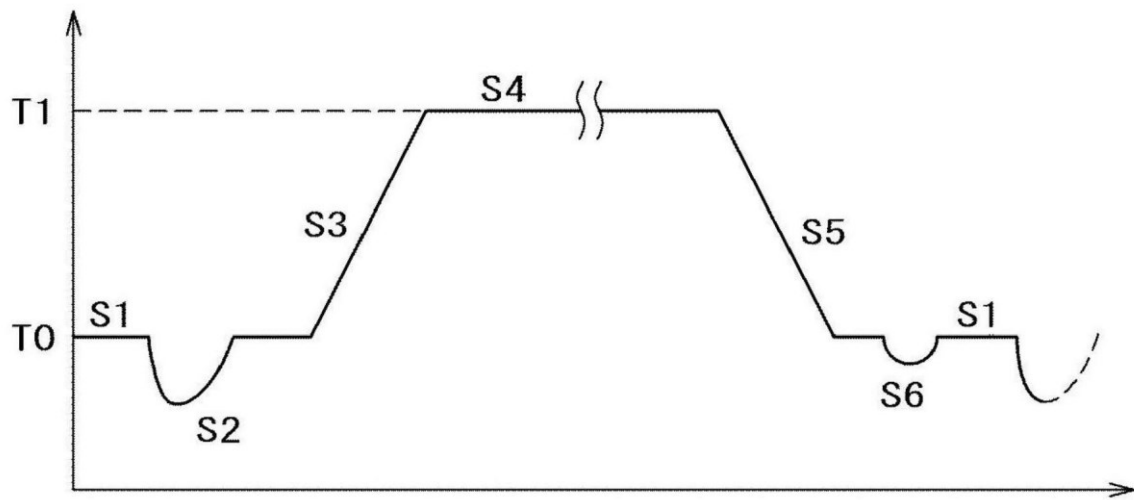


FIG. 6

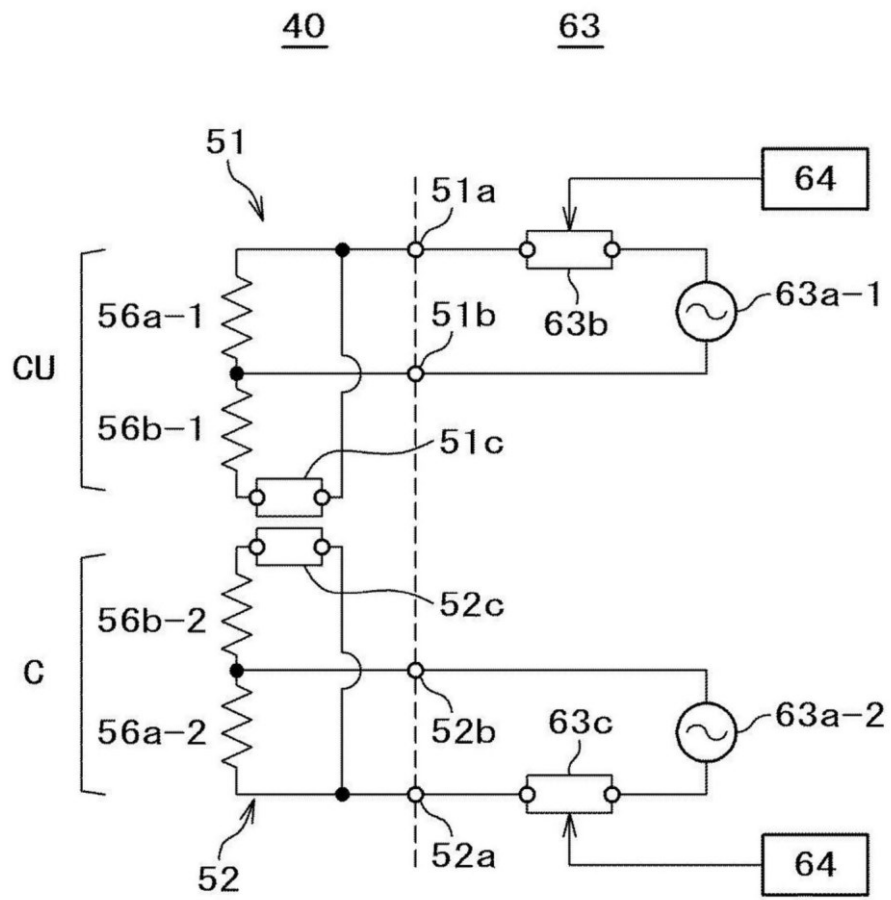


FIG. 7

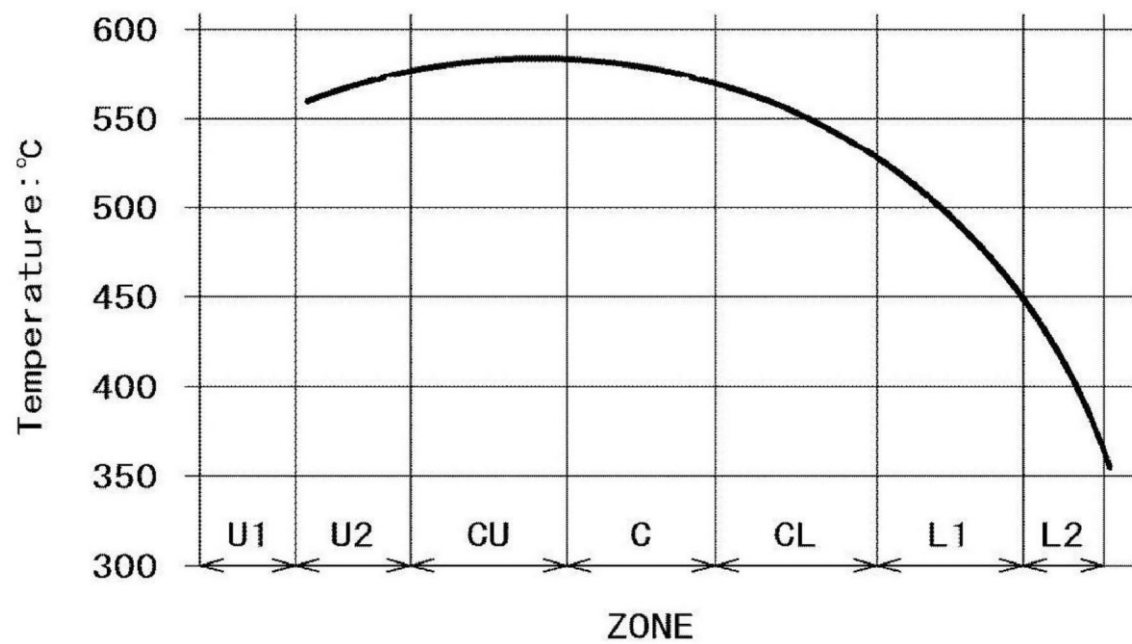


FIG. 8

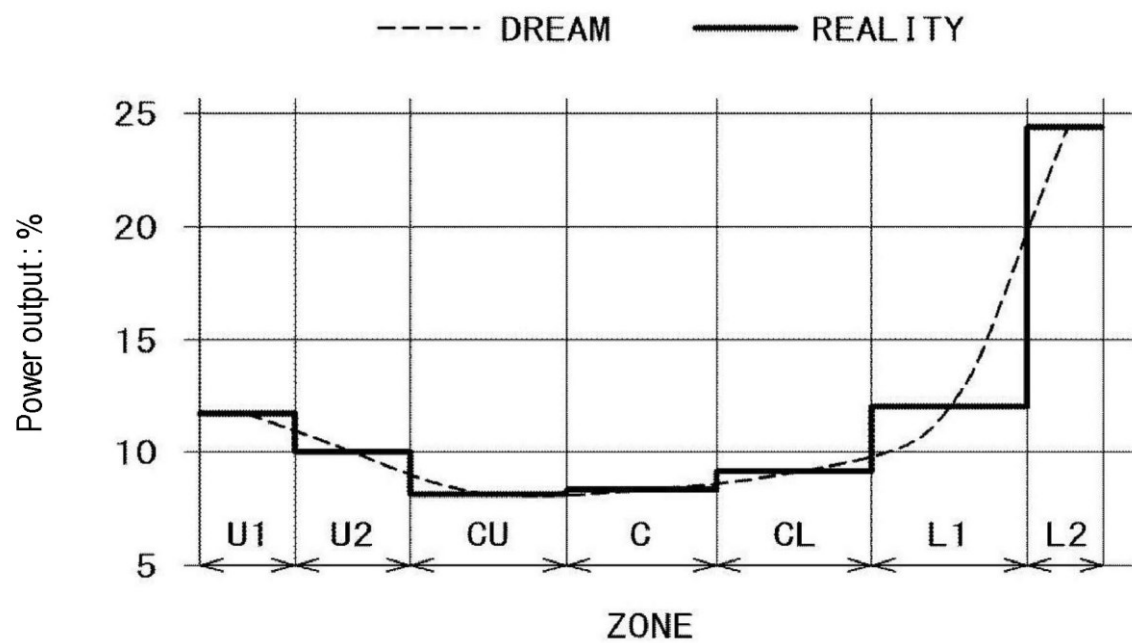


FIG. 9

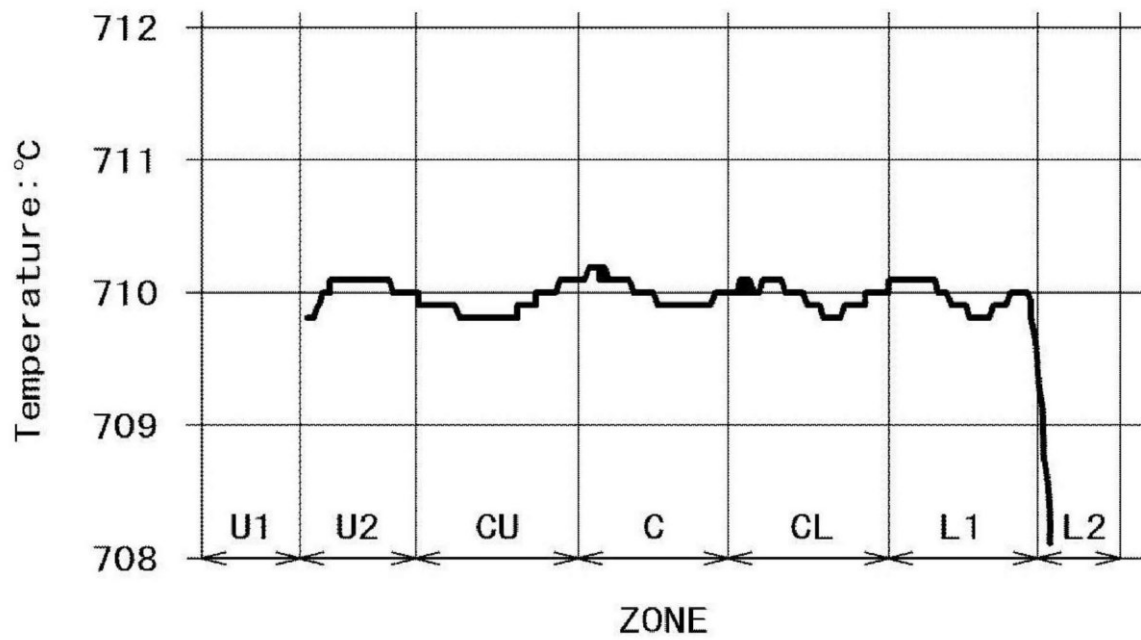


FIG. 10

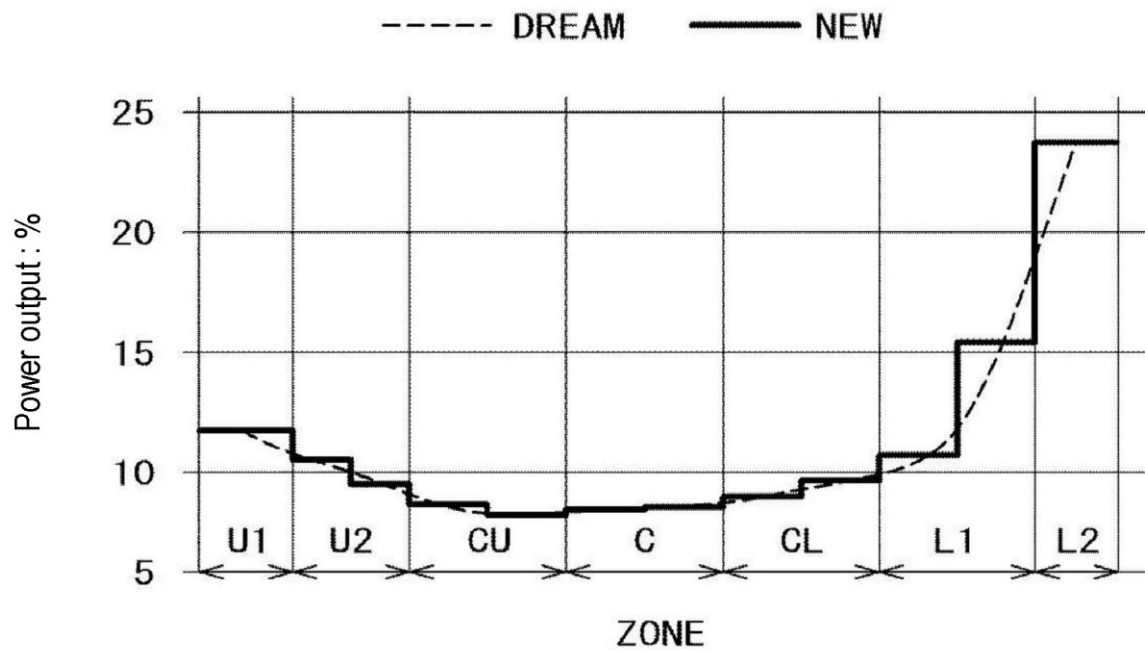


FIG. 11

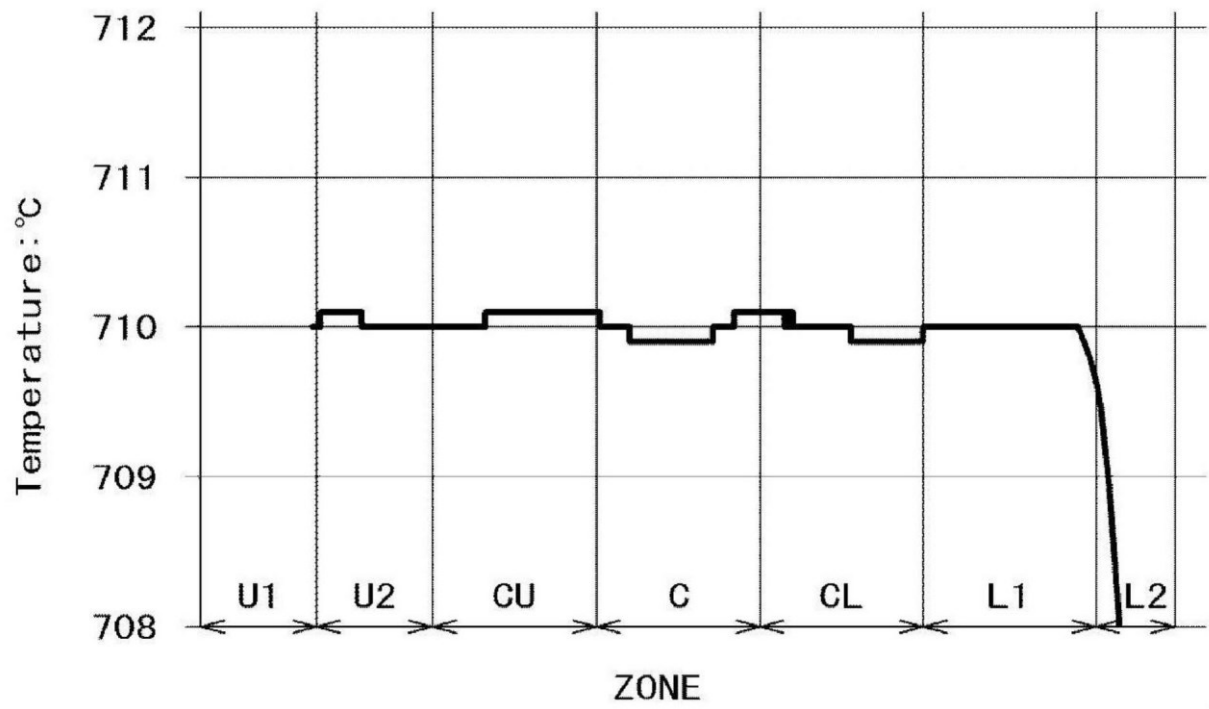


FIG. 12

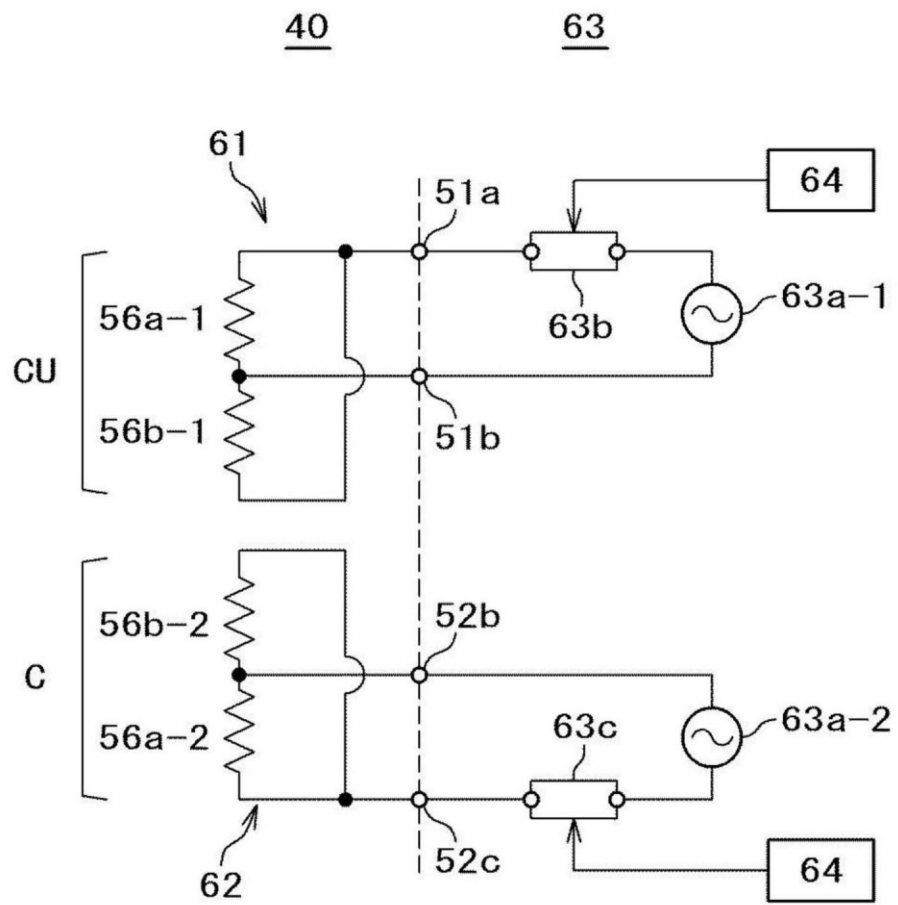


FIG. 13

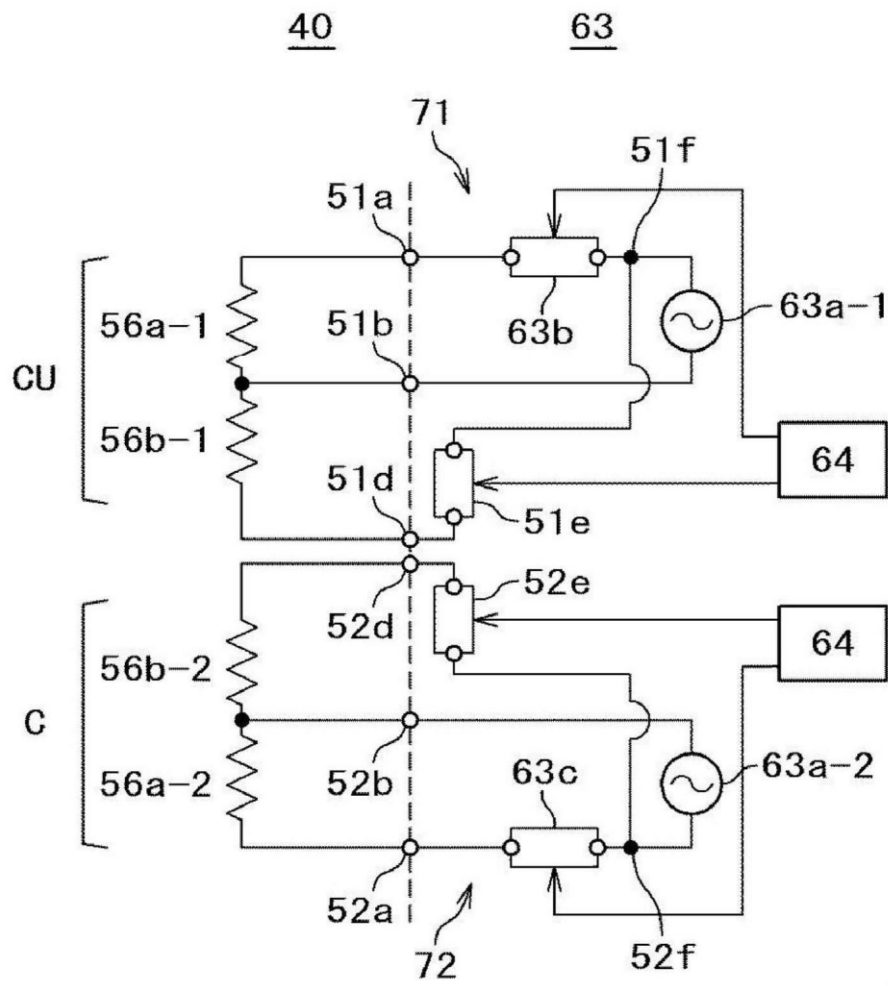


FIG. 14

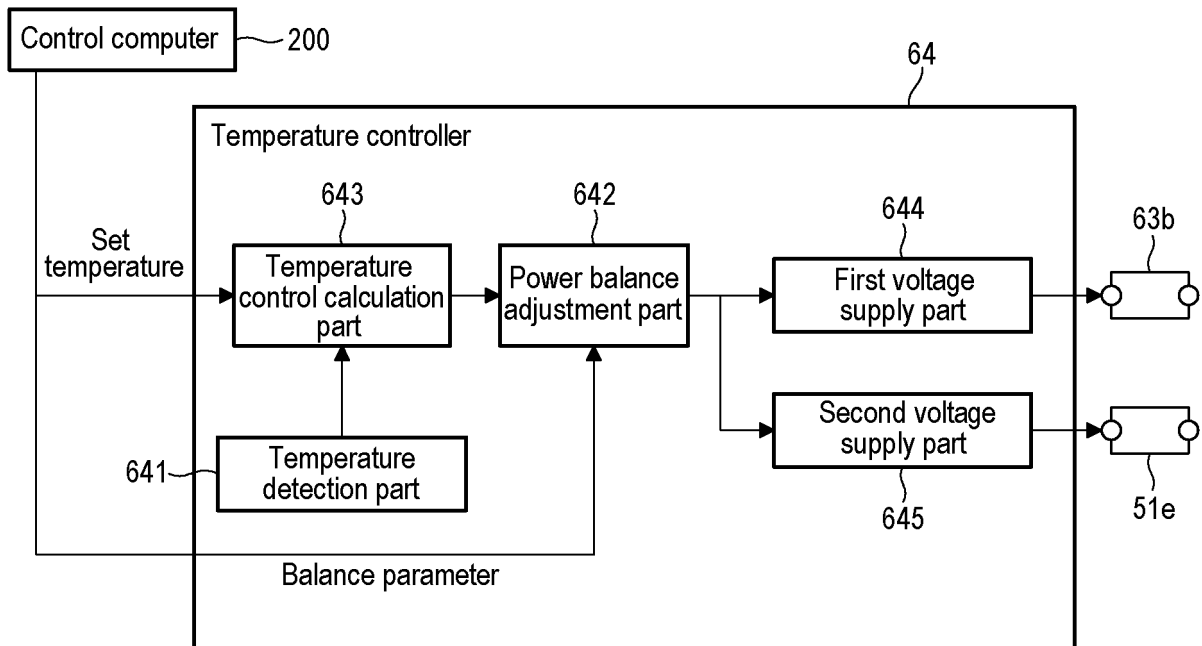


FIG. 15

No.	Temperature zone	Upper_Ratio	Lower_Ratio
1	200 °C	1.00	1.00
2	400 °C	1.03	0.97
3	600 °C	1.07	0.93
4	800 °C	1.10	0.90

FIG. 16

When using 600 degrees C parameter

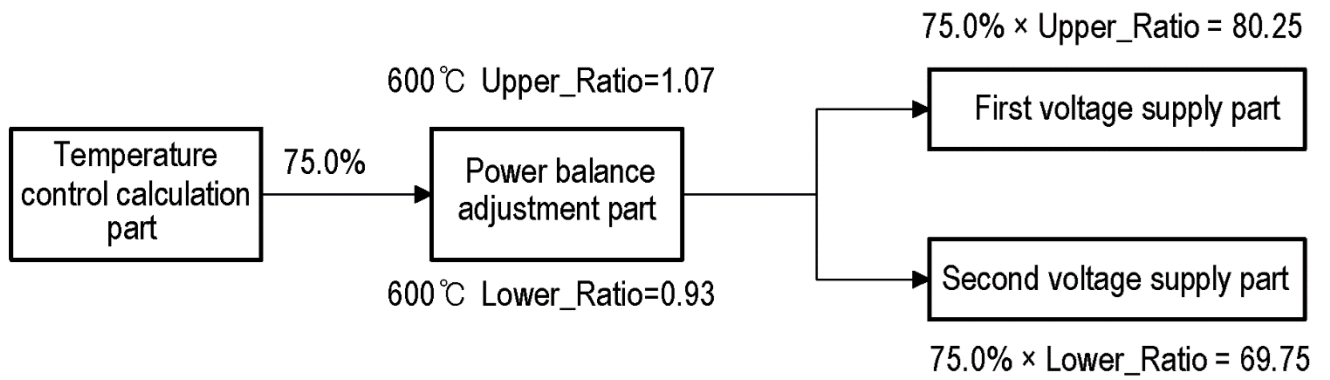


FIG. 17A

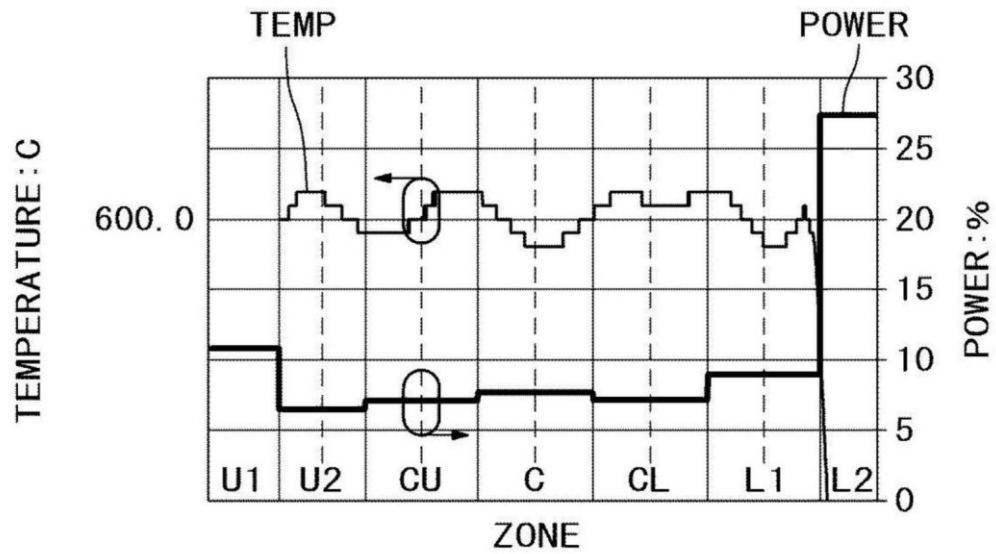


FIG. 17B

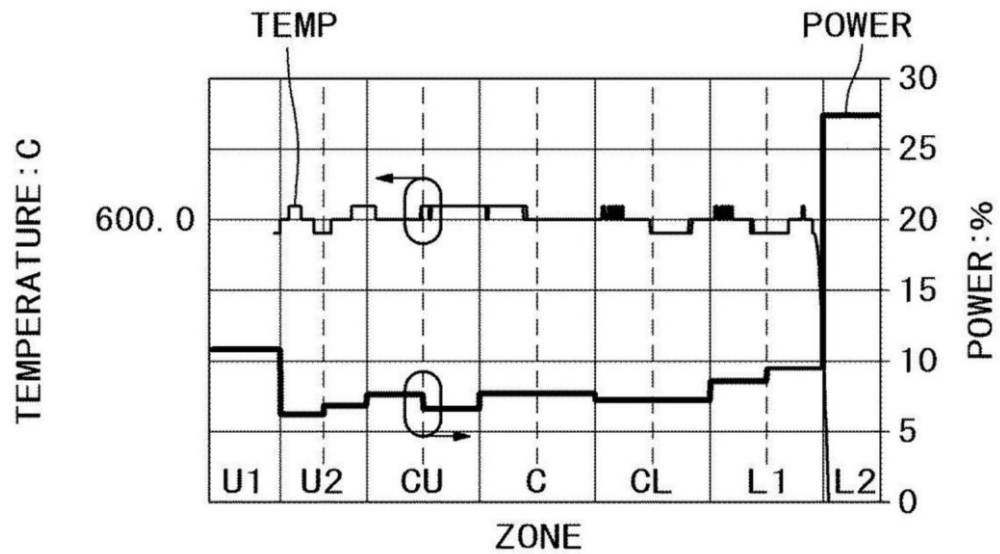


FIG. 17C

	U2	CU	C	CL	L1
Upper_Ratio	0.95	1.07	1.00	1.00	0.95
Lower_Ratio	1.05	0.93	1.00	1.00	1.05