

RTMP'S COPY

1

COATING COMPOSITIONTHIS SHEET HAS BEEN
REPLACED

This invention relates to a water-borne coating composition containing as one component an epoxidised natural rubber, to the preparation of such a composition and to its use.

Natural rubber latex was used as a component in oil-based paints and in water-based distempers in the 1930's. The compositions current at that time are extensively reviewed in "The Chemistry and Technology of Rubber Latex" C. Falconer Flint 581-590, Chapman & Hall Ltd London 1938. Although such paints were apparently to be found on the market, it is known that they suffered from substantial disadvantages in their stability, consistency, and brushing characteristics. Moreover, the paint films which they form suffered particular disadvantages in that they underwent severe yellowing and embrittlement as a result of oxidated degradation. Further, the coatings tended to peel and show low resistance to damage from mechanical impact.

20

Accordingly these early compositions failed to achieve sustained commercial application.

Although a later publication "Latex in Industry" 2nd Edition R.J. Nobel 689-692 Rubber Age New York 1953 reported a resurgence of interest in rubber latex-based paints, this was short-lived. Rubber latex systems had been totally eclipsed by the advent of polybutadiene and butadiene-styrene systems developed in the 1940's and acrylic latexes developed from the 1950's onwards. In short, there has been effectively no interest in natural rubber-based paint latexes over the past four decades.

We have now found that when epoxidised natural rubber is used as a component in coating compositions, certain surprising and unexpected benefits are obtained. For example, as compared with rubber latex-based coatings, the

This Sheet Has Been Replaced



films are relatively resistant to yellowing and embrittlement. Moreover, films are tough and resistant to mechanical damage. As compared with coatings based on the most up-to-date acrylic latex systems, the epoxidised
5 natural rubber systems produce coating films which are equally mechanically durable but are far more tenacious in their adhesion to substrate surfaces. Hence, in contrast to acrylic-based paint systems they can be used as a film-former in a coating composition without the need for an
10 adhesion promoter.

US-A-3 243 401 is concerned with latexes of epoxidised conjugated diene polymers having an epoxy equivalent weight of 2000 to 200. The epoxidised polymers illustrated in the
15 Examples are synthetic copolymers. The latexes have many uses as binders in paper and fabric production and processing. In use these binders need to be cured with a cross-linking agent, in particular a urea formaldehyde derivative.

20

Certain epoxidised rubber derivatives are known. A particularly effective process for their preparation has been described in GB-A-2 113 692. They are used substantially exclusively as raw materials for vulcanisation
25 and hence for the manufacture of hard rubber goods such as rubber seals and tyres. Their use as a component in water-borne paints is unknown.

In the present context the term "rubber" in the phrase
30 "epoxidised natural rubber" is used to mean rubber latex as found in nature.

Accordingly in its broadest aspect, the present invention
35 provides a water-borne coating composition containing as one component a latex of an epoxidised natural rubber.



THIS SHEET HAS BEEN
REPLACED

- The degree of epoxidation of the rubber will in practice be at least 10% of the theoretical maximum number of double bonds available for epoxidation. In practice, also the maximum level of epoxidation will not usually exceed 90%.
- 5 Examples of lower limits of epoxidation are 15% and 20%. Examples of upper limits of epoxidation are 60%, 70% and 75% of the theoretical maximum. The percentage of epoxidation referred to here is as defined in GB-A-2 113 692.
- 10 The function that the epoxidised natural rubber performs in the paint depends upon the proportion that it makes up of the total binder solids content of the composition. At lower levels, for example 15% by weight or more (up to 20% or up to 25% by weight), the resins are surprisingly touch
- 15 dry even though the epoxidised natural rubber has a low minimum film forming temperature (MFT). At higher levels, for example 50% by weight of total binder solids, the films formed have tenaceous adhesion.
- 20 The paints prepared according to this invention will in general be formulated with another resin as part of the total film-former.

Standard film-forming resins for use in the present

25 invention are generally stable dispersions of polymer particles in water.

Examples of classes of such polymers are polyacrylate and polymethacrylate polymers and co-polymers and polyvinyl

30 esters and co-polymers and styrene and butadiene co-polymers.

Examples of polyacrylates are polymers of C_{1-8} alkyl esters of acrylic and methacrylic acid. Examples of such acrylate

35 esters are methyl acrylate, ethyl acrylate, butyl acrylate, hexyl acrylate, 2-ethylhexyl acrylate and octyl acrylate.

This Sheet Has Been Replaced



Examples of such methacrylate esters are methyl methacrylate, ethyl methacrylate butyl methacrylate and hexyl methacrylate.

- 5 Examples of vinyl esters are vinyl C_{1-20} alkanolic acid esters, particularly, vinyl acetate, vinyl propionate and "vinyl versatate". Vinyl versatate is the trade name for a mixture of vinyl esters where the alkanolic acid component is derived from a mixture of branched chain acids containing on
10 average about 10 carbon atoms per alkyl unit.

The co-polymers that can be used as primary film-formers can be co-polymers based on two or more of the acrylate, methacrylate or vinyl ester monomers referred to above.

- 15 Alternatively the co-polymers can be formed with or include other co-monomers, for example free carboxylic acids, hydroxy esters, di-functional esters and/or hydrocarbons. Examples of such free acids are acrylic, methacrylic maleic
20 and fumaric acids.

- Examples of hydroxy esters are hydroxy C_{2-6} alkyl acrylates and methacrylates, especially 2-hydroxy ethyl acrylate and methacrylate, 3-hydroxy propyl acrylate and methacrylate, 3-
25 hydroxyprop-2-yl acrylate and 4-hydroxy butyl methacrylate.

Examples of difunctional esters are C_{1-8} alkyl maleates and fumarates, particularly dimethyl and diethyl maleate and fumarate.

- 30 Examples of hydrocarbons are styrene and optionally substituted styrenes.

- The precise composition of the polymer or co-polymer will
35 depend upon the particular physical characteristics (especially glass transition temperature) that the polymer



is required to exhibit. An appropriate composition can be derived by standard techniques.

At levels about 15% by weight of total binder solids the epoxidised natural rubber begins to behave as part of the film-former. Examples of other levels at which the epoxidised natural rubber contributes to film formation are 20%, 25% and 30%. At levels of 50% by weight it will tend to determine the characteristics of the film. The greater the difference in hardness between the epoxidised natural rubber and any other film-former the more pronounced is the extent of this determination when this effect begins to take place. The proportion of the epoxidised natural rubber can be increased until it constitutes the entire film-forming component of the composition.

The level of epoxidation has an impact on the physical properties of the epoxidised natural rubber and in particular its glass transition temperature (T_g). The T_g of the derivative is a property that has to be taken into more careful consideration when the derivative is employed as a film-former than when it is being used as an adhesion promoter. The T_g of epoxidised natural rubber is generally less than 20°C . Natural rubber with 75% epoxidation has a T_g of 10°C and below. Natural rubber with 65% epoxidation has a T_g of -10°C and below.

One particular benefit of using epoxidised natural rubber as a film-former is that coating compositions can be produced which have relatively low MFT's, often below -8°C . The MFT is the minimum temperature at which a resin system forms a film. It is measured according to ASTM test 2354-91. MFT differs from T_g in that T_g is a fundamental characteristic of a polymer, whereas MFT is a characteristic of the paint or resin system. It is effected by the make-up of the resin blend and the presence or absence of co-solvent.



THIS SHEET HAS BEEN
REPLACED

Resin systems based on epoxidised natural rubbers have the advantage that generally low MFT's can be achieved without the need to use co-solvent. Yet the films formed are hard, durable and display excellent adhesion to substrate.

5

The compositions of the present invention can be produced by standard methods, for example by blending the epoxidised natural rubber in the form of a latex with other components that are standard for coating compositions.

10

Components standard for paint compositions are pigments (especially in the form of a mill-base), extenders, dispersants and film-formers.

15 The coating composition is made by standard mixing and blending techniques.

The epoxidised rubber latex can be made using or by analogy with known processes as described for example in

20 GB-A-2 113 692 and Ind Eng Chem Res 1991 30 2573-76.

The natural rubber itself is known and can be obtained by tapping from plants.

25 The waterborne coating composition of the present invention is used to form protective or decorative coatings on substrates, for example the exterior or interior of buildings, engineering and architectural structures, land and water-based vehicles and aircraft.

30

The composition can be applied by conventional techniques, for example brushing, dipping, spraying, roll-coating and curtain coating. The resultant film dries at ambient temperature to form a tough durable coating which has
35 excellent adhesion to substrates and is resistant to weathering and embrittlement.

This Sheet Has Been Replaced



The following Examples illustrate the invention.

EXAMPLE 1: Preparation of coating compositions.

5 MILLBASE

A dispersion vessel was loaded with 280.8g water, 10.4g pigment dispersant DISPEX GA40 and 0.6g anti-foam agent DISPELAIR CF 246 and the contents were mixed for 5 minutes.
10 To the mixture was slowly added 1137.5g TiO₂ (RUTILE TiO₂ TIOXIDE TR 92) over 10 minutes. There was then added 90.8g water and the mixture was dispersed for 15 minutes. Finally, there was added 1.6g In-Can Preservative METACIDE 300 and 78.3g water and the mixture was stirred for a
15 further 20 minutes.

PAINT

25g of millbase was mixed with 3.2g styrene-acrylic
20 dispersion ROPAQUE OP-62LOE.

The following latex formulations were prepared:

- (1) 36.5g ENR* latex (65% epoxidation), 0.2g anti-foam
25 agent DISPELAIR CF246.
- (2) 36.5g ENR* latex (50% epoxidation), 0.2g anti-foam
Agent DISPELAIR CF 246.
- 30 (3) 36.5g ENR** latex (65% epoxidation), 0.2g anti-foam
agent DISPELAIR CF246.
- (4) 1.4g water, 21.9g acrylic latex solution,
14.6g water, 0.2g anti-foam agent DISPELAIR CF246.

35

Latex formulations (1), (2), (3) and (4) were added to
respective millbase/styrene-acrylic dispersion mixtures to



THIS SHEET HAS BEEN
REPLACED

form sample Nos. (A), (B), (C) and (D). Sample No. (D) which contains a standard acrylic latex was used as a control.

- 5 ENR* = epoxidised natural rubber according to GB-A-2 113 692
ENR**= epoxidised natural rubber according to GB-A-2 113 692 with modified catalyst.

EXAMPLE 2:

10

This Example compares the properties of a film formed from an ENR latex with a film formed from a standard acrylic latex and also demonstrates the effect of the degree of epoxidation of a natural rubber latex on the properties of
15 the film. The samples prepared according to Example 1 were used except that in Table 1 the samples were clear films prepared without pigment (TiO_2).

20

TABLE 1

25

Sample	MFT°C	Yellowing (ΔB) (1 Month, 70°C, dark)	Tack-free at 1 hr	Water Spot at 24 hrs
A	0	5.1	Yes	Good
B	<-8	10.3	Yes/No	Good
C	<-8	8.7	Yes	Good
D	-3	0.8	No	Good

This Sheet Has Been Replaced



TABLE 2

Sample	Tack- free at 1 hr	Water Spot at 24 hrs	Blocking Resistance		Adhesion to Alkyd (% failure)				Adhesion to Low Odour Eggshell (+ Teflon) (% failure)	Thermo- plasticity at 24 hrs
			24 hrs dry	48 hrs wet	Scuffed		Unscuffed			
					dry	wet	dry	wet		
A	Yes	Good	No blocking	No blocking	0	0	0	0	0	No sticking
			Moderate damage	Moderate damage						No marking
B	Yes	Good	Slight blocking	Moderate blocking	0	0	0	0	0	No sticking
			Moderate damage	Moderate damage						No marking
C	Yes	Good	No blocking	No blocking	0	0	0	0	0	No sticking
			Very slight damage	Very slight damage						No marking
D	Yes	Good	Moderate blocking	Moderate blocking	0	50	5	100	100	No sticking
			Moderate damage	Moderate damage						No marking

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

The results show in Tables 1 and 2 that films formed from ENR latexes have excellent adhesion, are tackfree at 1 hour and have good water spot and blocking resistance. Moreover, accelerated ageing of films showed no evidence of embrittlement or excessive yellowing, there is efficient film formation down to a temperature of -8°C and films are not thermoplastic when subjected to a temperature of 70°C for 24 hours.

10 COMPARATIVE EXAMPLE

Example 2 of US-A-3 243 401 was repeated exactly as described but replacing palmitic ethoxylate with ocnol ethoxylate, this being more readily commercially available, and yielded an epoxidised latex having an oxirane content of 2.24% (reported value 2.03%).

The relative adhesion properties of the latex prepared according to US-A-3 243 401 was compared with that of an epoxidised natural rubber latex according to the present invention. One sample of latex according to the present invention was coated on to unscuffed aged alkyd film on a wood substrate. Two portions of latex according to Example 2 of US-A-3 243 401 were coated on to two identical aged alkyd films on a wood substrate. One of these samples was cured using commercial urea formaldehyde (BEETLE 610) as described in US-A-3 243 401, the other was uncured.

The results of the adhesion tests are shown in Table 3.

This Sheet Has Been Replaced



TABLE 3

THIS SHEET HAS BEEN
REPLACED


<u>Adhesion to Alkyd</u>			
	<u>Latex 1</u>	<u>Latex 2</u>	<u>Latex 2 Cured</u>
5 Dry	0%	30%	0%
Wet	0%	80%	0%

The results are expressed as % adhesion failure.

- 10 Latex 1 is latex according to the present invention. Latex
2 is latex according to US-A-3 243 401.

Latex 2 (unlike Latex 1) remains tacky even after 24 hours
and requires curing with urea formaldehyde to form a proper
15 paint film.

This Sheet Has Been Replaced





1. A water-borne coating composition containing as one component a latex of an epoxidised natural rubber.
- 5 2. A composition according to claim 1, where the degree of epoxidation of the natural rubber is at least 10% of the theoretical maximum.
- 10 3. A composition according to claim 2, where the degree of epoxidation of the natural rubber is up to 90% of the theoretical maximum.
- 15 4. A composition according to any one of the preceding claims, where the epoxidised natural rubber comprises at least 15% by weight of the total binder solids content of the composition.
- 20 5. A composition according to claim 4, where the epoxidised natural rubber comprises between 20 and 35% by weight of the total binder solids content of the composition.
- 25 6. A composition according to claim 4, where the epoxidised natural rubber comprises more than 25% by weight of the total binder solids content of the composition.
- 30 7. A composition according to any one of the preceding claims, where the epoxidised natural rubber has a glass transition temperature (T_g) of less than 20°C.
8. A composition according to claim 7, where the epoxidised natural rubber has a T_g of less than 0°C.
- 35 9. Use of a latex of an epoxidised natural rubber as a component of a water-borne coating composition.



THIS SHEET HAS BEEN
REPLACED

10. Use of a latex of an epoxidised natural rubber as an adhesion promoter in a water-borne coating composition.

5 11. A process for preparing a water-borne coating composition which comprises mixing a latex of an epoxidised natural rubber as defined in any one of claims 1 to 8 with other components of a coating composition.

10 12. A method of coating a substrate which comprises applying to the surface of the substrate to be coated a water-borne coating composition as claimed in any one of claims 1 to 8 and allowing the composition to dry at ambient temperature and to form a film.

15

This Sheet Has Been Replaced



ABSTRACT


THIS SHEET HAS BEEN
REPLACED

COATING COMPOSITION

5 A water-borne coating composition contains as one component
a latex of an epoxidised natural rubber. The composition
has a low minimum film-forming temperature (MFT), and
produces films which are hard, durable and display excellent
adhesion to substrate.

10

This Sheet Has Been Replaced



15

20

25

30

35

This invention relates to a water-borne coating composition containing as one component an epoxidised natural rubber, to the preparation of such a composition and to its use.

Natural rubber latex was used as a component in oil-based paints and in water-based distempers in the 1930's. The compositions current at that time are extensively reviewed in "The Chemistry and Technology of Rubber Latex" C. Falconer Flint 581-590, Chapman & Hall Ltd London 1938. Although such paints were apparently to be found on the market, it is known that they suffered from substantial disadvantages in their stability, consistency, and brushing characteristics. Moreover, the paint films which they form suffered particular disadvantages in that they underwent severe yellowing and embrittlement as a result of oxidated degradation. Further, the coatings tended to peel and show low resistance to damage from mechanical impact.

Accordingly these early compositions failed to achieve sustained commercial application.

... Although a later publication "Latex in Industry" 2nd Edition R.J. Nobel 589-592 Rubber Age New York 1953 reported a resurgence of interest in rubber latex-based paints, this was short-lived. Rubber latex systems had been totally eclipsed by the advent of polybutadiene and butadiene-styrene systems developed in the 1940's and acrylic latexes developed from the 1950's onwards. In short, there has been effectively no interest in natural rubber-based paint latexes over the past four decades.

We have now found that when epoxidised natural rubber is used as a component in coating compositions, certain surprising and unexpected benefits are obtained. For example, as compared with rubber latex-based coatings, the films are relatively resistant to yellowing and embrittlement. Moreover, films are tough and resistant to mechanical damage. As compared with coatings based on the most up-to-date acrylic latex systems, the epoxidised natural rubber systems produce coating films which are equally mechanically durable but are far more tenacious in their adhesion to substrate surfaces. Hence, in contrast to acrylic-based paint systems they can be used as a film-former in a coating composition without the need for an adhesion promoter.

US-A-3 243 401 is concerned with latexes of epoxidised conjugated diene polymers having an epoxy equivalent weight of 2000 to 200. The epoxidised polymers illustrated in the Examples are synthetic copolymers. The latexes have many uses as binders in paper and fabric production and processing. In use these binders need to be cured with a cross-linking agent, in particular a urea formaldehyde derivative.

Certain epoxidised rubber derivatives are known. A particularly effective process for their preparation has been described in GB-A-2 113 892. They are used substantially exclusively as raw materials for vulcanisation and hence for the manufacture of hard rubber goods such as rubber seals and tyres. Their use as a component in water-borne paints is unknown.

In the present context the term "rubber" in the phrase "epoxidised natural rubber" is used to mean rubber latex as found in nature.

Accordingly in its broadest aspect, the present invention provides a water-borne coating composition containing as one component a latex of an epoxidised natural rubber.

The degree of epoxidation of the rubber will in practice be at least 10% of the theoretical maximum number of double bonds available for epoxidation. In practice, also the maximum level of epoxidation will not usually exceed 90%. Examples of lower limits of epoxidation are 15% and 20%. Examples of upper limits of epoxidation are 60%, 70% and 75% of the theoretical maximum. The percentage of epoxidation referred to here is as defined in GB-A-2 113 892.

The function that the epoxidised natural rubber performs in the paint depends upon the proportion that it makes up of the total binder solids content of the composition. At lower levels, for example 15% by weight or more (up to 20% or up to 25% by weight), the resins are surprisingly touch dry even though the epoxidised natural rubber has a low minimum film forming temperature (MFT). At higher levels, for example 50% by weight of total binder solids, the films formed have tenacious adhesion.

The paints prepared according to this invention will in general be formulated with another resin as part of the total film-former.

Standard film-forming resins for use in the present invention are generally stable dispersions of polymer particles in water.

Examples of classes of such polymers are polyacrylate and polymethacrylate polymers and co-polymers and polyvinyl esters and co-polymers and styrene and butadiene co-polymers.

Examples of polyacrylates are polymers of C₁₋₁₂ alkyl esters of acrylic and methacrylic acid. Examples of such acrylate esters are methyl acrylate, ethyl acrylate, butyl acrylate, hexyl acrylate, 2-ethylhexyl acrylate and octyl acrylate.

Examples of such methacrylate esters are methyl methacrylate, ethyl methacrylate butyl methacrylate and hexyl methacrylate.



Examples of vinyl esters are vinyl C₁₋₂₀ alkanolic acid esters, particularly, vinyl acetate, vinyl propionate and "vinyl versatate". Vinyl versatate is the trade name for a mixture of vinyl esters where the alkanolic acid component is derived from a mixture of branched chain acids containing on average about 10 carbon atoms per alkyl unit.

5 The co-polymers that can be used as primary film-formers can be co-polymers based on two or more of the acrylate, methacrylate or vinyl ester monomers referred to above.

Alternatively the co-polymers can be formed with or include other co-monomers, for example free carboxylic acids, hydroxy esters, di-functional esters and/or hydrocarbons. Examples of such free acids are acrylic, methacrylic maleic and fumaric acids.

10 Examples of hydroxy esters are hydroxy C₁₋₈ alkyl acrylates and methacrylates, especially 2-hydroxy ethyl acrylate and methacrylate, 3-hydroxy propyl acrylate and methacrylate, 3-hydroxyprop-2-yl acrylate and 4-hydroxy butyl methacrylate.

Examples of difunctional esters are C₁₋₈ alkyl maleates and fumarates, particularly dimethyl and diethyl maleate and fumarate.

15 Examples of hydrocarbons are styrene and optionally substituted styrenes.

The precise composition of the polymer or co-polymer will depend upon the particular physical characteristics (especially glass transition temperature) that the polymer is required to exhibit. An appropriate composition can be derived by standard techniques.

At levels about 15% by weight of total binder solids the epoxidised natural rubber begins to behave as 20 part of the film-former. Examples of other levels at which the epoxidised natural rubber contributes to film formation are 20%, 25% and 30%. At levels of 50% by weight it will tend to determine the characteristics of the film. The greater the difference in hardness between the epoxidised natural rubber and any other film-former the more pronounced is the extent of this determination when this effect begins to take place. The proportion of the epoxidised natural rubber can be increased until it constitutes the entire film-forming 25 component of the composition.

The level of epoxidation has an impact on the physical properties of the epoxidised natural rubber and in particular its glass transition temperature (T_g). The T_g of the derivative is a property that has to be taken into more careful consideration when the derivative is employed as a film-former than when it is being used as an adhesion promoter. The T_g of epoxidised natural rubber is generally less than 20°C. Natural rubber 30 with 75% epoxidation has a T_g of 10°C and below. Natural rubber with 85% epoxidation has a T_g of -10°C and below.

One particular benefit of using epoxidised natural rubber as a film-former is that coating compositions can be produced which have relatively low MFT's, often below -8°C. The MFT is the minimum temperature at which a resin system forms a film. It is measured according to ASTM test 2354-91. MFT differs from T_g 35 in that T_g is a fundamental characteristic of a polymer, whereas MFT is a characteristic of the paint or resin system. It is effected by the make-up of the resin blend and the presence or absence of co-solvent.

Resin systems based on epoxidised natural rubbers have the advantage that generally low MFT's can be achieved without the need to use co-solvent. Yet the films formed are hard, durable and display excellent adhesion to substrate.

40 The compositions of the present invention can be produced by standard methods, for example by blending the epoxidised natural rubber in the form of a latex with other components that are standard for coating compositions.

Components standard for paint compositions are pigments (especially in the form of a mill-base), extenders, dispersants and film-formers.

45 The coating composition is made by standard mixing and blending techniques.

The epoxidised rubber latex can be made using or by analogy with known processes as described for example in GB-A-2 113 662 and Ind Eng Chem Res 1991 30 2573-76.

The natural rubber itself is known and can be obtained by tapping from plants.

50 The waterborne coating composition of the present invention is used to form protective or decorative coatings on substrates, for example the exterior or interior of buildings, engineering and architectural structures, land and water-based vehicles and aircraft.

The composition can be applied by conventional techniques, for example brushing, dipping, spraying, roll-coating and curtain coating. The resultant film dries at ambient temperature to form a tough durable coating which has excellent adhesion to substrates and is resistant to weathering and embrittlement.

55 The following Examples illustrate the invention.



EXAMPLE 1: Preparation of coating compositions.

THIS SHEET HAS BEEN
REPLACED

MILLBASE

A dispersion vessel was loaded with 280.8g water, 10.4g pigment dispersant DISPEX GA40 and 0.8g anti-foam agent DISPELAIR CF 248 and the contents were mixed for 5 minutes. To the mixture was slowly added 1197.5g TiO_2 (RUTILE TiO_2 TIOXIDE TR 92) over 10 minutes. There was then added 90.8g water and the mixture was dispersed for 15 minutes. Finally, there was added 1.6g In-Can preservative METACIDE 300 and 78.3g water and the mixture was stirred for a further 20 minutes.

PAINT

25g of millbase was mixed with 3.2g styrene-acrylic dispersion ROPAQUE OP-62LOE.

The following latex formulations were prepared:

- (1) 36.5g ENR⁺ latex (65% epoxidation), 0.2g anti-foam agent DISPELAIR CF248.
- (2) 36.5g ENR⁺ latex (50% epoxidation), 0.2g anti-foam Agent DISPELAIR CF 248.
- (3) 36.5g ENR⁺ latex (65% epoxidation), 0.2g anti-foam agent DISPELAIR CF248.
- (4) 1.4g water, 21.6g acrylic latex solution,
14.8g water, 0.2g anti-foam agent DISPELAIR CF248.

Latex formulations (1), (2), (3) and (4) were added to respective millbase/styrene-acrylic dispersion mixtures to form sample Nos. (A), (B), (C) and (D). Sample No. (D) which contains a standard acrylic latex was used as a control.

ENR⁺ = epoxidised natural rubber according to GB-A-2 113 692

ENR⁺ = epoxidised natural rubber according to GB-A-2 113 692 with modified catalyst.

EXAMPLE 2:

This Example compares the properties of a film formed from an ENR latex with a film formed from a standard acrylic latex and also demonstrates the effect of the degree of epoxidation of a natural rubber latex on the properties of the film. The samples prepared according to Example 1 were used except that in Table 1 the samples were clear films prepared without pigment (TiO_2).

TABLE 1

Sample	MFT °C	Yellowing (ΔB) (1 Month, 70 °C, dark)	Tack-free at 1 hr	Water Spot at 24 hrs
A	0	5.1	Yes	Good
B	<-8	10.3	Yes/No	Good
C	<-8	8.7	Yes	Good
D	-3	0.8	No	Good

This Sheet Has Been Replaced



TABLE 2

Sample	Tack-free at 1 hr	Water Spot at 24 hrs	Blocking Resistance		Adhesion to Alkyd (% failure)				Adhesion to Low Odour Nythell (+ Teflon) (% failure)	Thermo-plasticity at 24 hrs
			24 hrs dry	48 hrs wet	Scuffed	Unscuffed	wet	dry		
A	Yes	Good	No blocking Moderate damage	No blocking Moderate damage	0	0	0	0	0	No sticking No marking
B	Yes	Good	Slight blocking Moderate damage	Moderate blocking Moderate damage	0	0	0	0	0	No sticking No marking
C	Yes	Good	No blocking Very slight damage	No blocking Very slight damage	0	0	0	0	0	No sticking No marking
D	Yes	Good	Moderate blocking Moderate damage	Moderate blocking Moderate damage	0	50	5	100	100	No sticking No marking

The results show in Tables 1 and 2 that films formed from ENR latexes have excellent adhesion, are tackfree at 1 hour and have good water spot and blocking resistance. Moreover, accelerated ageing of films showed no evidence of embrittlement or excessive yellowing, there is efficient film formation down to a temperature of -8°C and films are not thermoplastic when subjected to a temperature of 70°C for 24 hours.



COMPARATIVE EXAMPLE

Example 2 of US-A-3 243 401 was repeated exactly as described but replacing palmitic ethoxylate with ocanol ethoxylate, this being more readily commercially available, and yielded an epoxidised latex having an oxirane content of 2.24% (reported value 2.03%).

The relative adhesion properties of the latex prepared according to US-A-3 243 401 was compared with that of an epoxidised natural rubber latex according to the present invention. One sample of latex according to the present invention was coated on to unscuffed aged alkyd film on a wood substrate. Two portions of latex according to Example 2 of US-A-3 243 401 were coated on to two identical aged alkyd films on a wood substrate. One of these samples was cured using commercial urea formaldehyde (BEETLE 610) as described in US-A-3 243 401, the other was uncured.

The results of the adhesion tests are shown in Table 3.

TABLE 3

Adhesion to Alkyd			
	Latex 1	Latex 2	Latex 2 Cured
Dry	0%	30%	0%
Wet	0%	80%	0%

The results are expressed as % adhesion failure.

Latex 1 is latex according to the present invention. Latex 2 is latex according to US-A-3 243 401.

Latex 2 (unlike Latex 1) remains tacky even after 24 hours and requires curing with urea formaldehyde to form a proper paint film.

Claims

1. A water-borne coating composition containing as one component a latex of an epoxidised natural rubber.
2. A composition according to claim 1, where the degree of epoxidation of the natural rubber is at least 10% of the theoretical maximum.
3. A composition according to claim 2, where the degree of epoxidation of the natural rubber is up to 90% of the theoretical maximum.
4. A composition according to any one of the preceding claims, where the epoxidised natural rubber comprises at least 15% by weight of the total binder solids content of the composition.
5. A composition according to claim 4, where the epoxidised natural rubber comprises between 20 and 35% by weight of the total binder solids content of the composition.
6. A composition according to claim 4, where the epoxidised natural rubber comprises more than 25% by weight of the total binder solids content of the composition.
7. A composition according to any one of the preceding claims, where the epoxidised natural rubber has a glass transition temperature (T_g) of less than 20°C.
8. A composition according to claim 7, where the epoxidised natural rubber has a T_g of less than 0°C.
9. Use of a latex of an epoxidised natural rubber as a component of a water-borne coating composition.
10. Use of a latex of an epoxidised natural rubber as an adhesion promoter in a water-borne coating composition.



THIS SHEET HAS BEEN
REPLACED

11. A process for preparing a water-borne coating composition which comprises mixing a latex of an epoxidised natural rubber as defined in any one of claims 1 to 8 with other components of a coating composition.

12. A method of coating a substrate which comprises applying to the surface of the substrate to be coated a water-borne coating composition as claimed in any one of claims 1 to 8 and allowing the composition to dry at ambient temperature and to form a film.

This Sheet Has Been Replaced



COATING COMPOSITION

CONTAINING EPOXIDISED RUBBER

This invention relates to a water-borne coating composition containing as one component an epoxidised natural rubber, to
5 the preparation of such a composition and to its use.

Natural rubber latex was used as a component in oil-based paints and in water-based distempers in the 1930's. The compositions current at that time are extensively reviewed
10 in "The Chemistry and Technology of Rubber Latex" C. Falconer Flint 581-590, Chapman & Hall Ltd London 1938. Although such paints were apparently to be found on the market, it is known that they suffered from substantial disadvantages in their stability, consistency, and brushing
15 characteristics. Moreover, the paint films which they form suffered particular disadvantages in that they underwent severe yellowing and embrittlement as a result of oxidated degradation. Further, the coatings tended to peel and show low resistance to damage from mechanical impact.

20

Accordingly these early compositions failed to achieve sustained commercial application.

Although a later publication "Latex in Industry" 2nd Edition
25 R.J. Nobel 689-692 Rubber Age New York 1953 reported a resurgence of interest in rubber latex-based paints, this was short-lived. Rubber latex systems had been totally eclipsed by the advent of polybutadiene and butadiene-styrene systems developed in the 1940's and acrylic latexes
30 developed from the 1950's onwards. In short, there has been effectively no interest in natural rubber-based paint latexes over the past four decades.

We have now found that when epoxidised natural rubber is
35 used as a component in coating compositions, certain surprising and unexpected benefits are obtained. For example, as compared with rubber latex-based coatings, the

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date : 25 FEB 1997

2

films are relatively resistant to yellowing and embrittlement. Moreover, films are tough and resistant to mechanical damage. As compared with coatings based on the most up-to-date acrylic latex systems, the epoxidised
5 natural rubber systems produce coating films which are equally mechanically durable but are far more tenacious in their adhesion to substrate surfaces. Hence, in contrast to acrylic-based paint systems they can be used as a film-former in a coating composition without the need for an
10 adhesion promoter.

US-A-3 243 401 is concerned with latexes of epoxidised conjugated diene polymers having an epoxy equivalent weight of 2000 to 200. The epoxidised polymers illustrated in the
15 Examples are synthetic copolymers. The latexes have many uses as binders in paper and fabric production and processing. In use these binders need to be cured with a cross-linking agent, in particular a urea formaldehyde derivative.

20

Certain epoxidised rubber derivatives are known. A particularly effective process for their preparation has been described in GB-A-2 113 692. They are used substantially exclusively as raw materials for vulcanisation
25 and hence for the manufacture of hard rubber goods such as rubber seals and tyres. Their use as a component in water-borne paints is unknown.

In the present context the term "rubber" in the phrase
30 "epoxidised natural rubber" is used to mean rubber latex as found in nature.

Accordingly in its broadest aspect, the present invention
35 provides a water-borne coating composition containing as one component a latex of an epoxidised natural rubber.

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date 25 FEB 1997

3

- The degree of epoxidation of the rubber will in practice be at least 10% of the theoretical maximum number of double bonds available for epoxidation. In practice, also the maximum level of epoxidation will not usually exceed 90%.
- 5 Examples of lower limits of epoxidation are 15% and 20%. Examples of upper limits of epoxidation are 60%, 70% and 75% of the theoretical maximum. The percentage of epoxidation referred to here is as defined in GB-A-2 113 692.
- 10 The function that the epoxidised natural rubber performs in the paint depends upon the proportion that it makes up of the total binder solids content of the composition. At lower levels, for example 15% by weight or more (up to 20% or up to 25% by weight), the resins are surprisingly touch
- 15 dry even though the epoxidised natural rubber has a low minimum film forming temperature (MFT). At higher levels, for example 50% by weight of total binder solids, the films formed have tenaceous adhesion.
- 20 The paints prepared according to this invention will in general be formulated with another resin as part of the total film-former.

Standard film-forming resins for use in the present

25 invention are generally stable dispersions of polymer particles in water.

Examples of classes of such polymers are polyacrylate and polymethacrylate polymers and co-polymers and polyvinyl

30 esters and co-polymers and styrene and butadiene co-polymers.

Examples of polyacrylates are polymers of C_{1-8} alkyl esters of acrylic and methacrylic acid. Examples of such acrylate

35 esters are methyl acrylate, ethyl acrylate, butyl acrylate, hexyl acrylate, 2-ethylhexyl acrylate and octyl acrylate.

Examples of such methacrylate esters are methyl methacrylate, ethyl methacrylate butyl methacrylate and hexyl methacrylate.

- 5 Examples of vinyl esters are vinyl C_{1-20} alkanolic acid esters, particularly, vinyl acetate, vinyl propionate and "vinyl versatate". Vinyl versatate is the trade name for a mixture of vinyl esters where the alkanolic acid component is derived from a mixture of branched chain acids containing on
10 average about 10 carbon atoms per alkyl unit.

The co-polymers that can be used as primary film-formers can be co-polymers based on two or more of the acrylate, methacrylate or vinyl ester monomers referred to above.

15

- Alternatively the co-polymers can be formed with or include other co-monomers, for example free carboxylic acids, hydroxy esters, di-functional esters and/or hydrocarbons. Examples of such free acids are acrylic, methacrylic maleic
20 and fumaric acids.

- Examples of hydroxy esters are hydroxy C_{2-6} alkyl acrylates and methacrylates, especially 2-hydroxy ethyl acrylate and methacrylate, 3-hydroxy propyl acrylate and methacrylate, 3-
25 hydroxyprop-2-yl acrylate and 4-hydroxy butyl methacrylate.

Examples of difunctional esters are C_{1-8} alkyl maleates and fumarates, particularly dimethyl and diethyl maleate and fumarate.

30

- Examples of hydrocarbons are styrene and optionally substituted styrenes.


- The precise composition of the polymer or co-polymer will
35 depend upon the particular physical characteristics (especially glass transition temperature) that the polymer

is required to exhibit. An appropriate composition can be derived by standard techniques.

At levels about 15% by weight of total binder solids the
5 epoxidised natural rubber begins to behave as part of the
film-former. Examples of other levels at which the
epoxidised natural rubber contributes to film formation are
20%, 25% and 30%. At levels of 50% by weight it will tend
to determine the characteristics of the film. The greater
10 the difference in hardness between the epoxidised natural
rubber and any other film-former the more pronounced is the
extent of this determination when this effect begins to take
place. The proportion of the epoxidised natural rubber can
be increased until it constitutes the entire film-forming
15 component of the composition.

The level of epoxidation has an impact on the physical
properties of the epoxidised natural rubber and in
particular its glass transition temperature (T_g). The T_g of
20 the derivative is a property that has to be taken into more
careful consideration when the derivative is employed as a
film-former than when it is being used as an adhesion
promoter. The T_g of epoxidised natural rubber is generally
less than 20°C . Natural rubber with 75% epoxidation has a T_g
25 of 10°C and below. Natural rubber with 65% epoxidation has
a T_g of -10°C and below.

One particular benefit of using epoxidised natural rubber as
a film-former is that coating compositions can be produced
30 which have relatively low MFT's, often below -8°C . The MFT
is the minimum temperature at which a resin system forms a
film. It is measured according to ASTM test 2354-91. MFT
differs from T_g in that T_g is a fundamental characteristic
of a polymer, whereas MFT is a characteristic of the paint
35 or resin system. It is effected by the make-up of the resin
blend and the presence or absence of co-solvent.

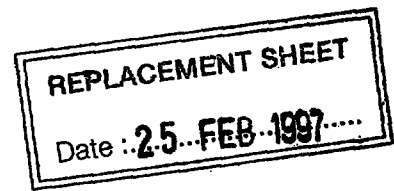

Resin systems based on epoxidised natural rubbers have the advantage that generally low MFT's can be achieved without the need to use co-solvent. Yet the films formed are hard, durable and display excellent adhesion to substrate.

5

The compositions of the present invention can be produced by standard methods, for example by blending the epoxidised natural rubber in the form of a latex with other components that are standard for coating compositions.

10

Components standard for paint compositions are pigments (especially in the form of a mill-base), extenders, dispersants and film-formers.

15 The coating composition is made by standard mixing and blending techniques.

The epoxidised rubber latex can be made using or by analogy with known processes as described for example in

20 GB-A-2 113 692 and Ind Eng Chem Res 1991 30 2573-76.

The natural rubber itself is known and can be obtained by tapping from plants.

25 The waterborne coating composition of the present invention is used to form protective or decorative coatings on substrates, for example the exterior or interior of buildings, engineering and architectural structures, land and water-based vehicles and aircraft.

30

The composition can be applied by conventional techniques, for example brushing, dipping, spraying, roll-coating and curtain coating. The resultant film dries at ambient temperature to form a tough durable coating which has
35 excellent adhesion to substrates and is resistant to weathering and embrittlement.

25 FEB 1997

Date :.....

The following Examples illustrate the invention.

EXAMPLE 1: Preparation of coating compositions.

5 MILLBASE

A dispersion vessel was loaded with 280.8g water, 10.4g pigment dispersant DISPEX GA40 and 0.6g anti-foam agent DISPELAIR CF 246 and the contents were mixed for 5 minutes.
10 To the mixture was slowly added 1137.5g TiO₂ (RUTILE TiO₂ TIOXIDE TR 92) over 10 minutes. There was then added 90.8g water and the mixture was dispersed for 15 minutes. Finally, there was added 1.6g In-Can Preservative METACIDE 300 and 78.3g water and the mixture was stirred for a
15 further 20 minutes.

PAINT

25g of millbase was mixed with 3.2g styrene-acrylic
20 dispersion ROPAQUE OP-62LOE.

The following latex formulations were prepared:

- (1) 36.5g ENR* latex (65% epoxidation), 0.2g anti-foam
25 agent DISPELAIR CF246.
- (2) 36.5g ENR* latex (50% epoxidation), 0.2g anti-foam
Agent DISPELAIR CF 246.
- 30 (3) 36.5g ENR** latex (65% epoxidation), 0.2g anti-foam
agent DISPELAIR CF246.
- (4) 1.4g water, 21.9g acrylic latex solution,
14.6g water, 0.2g anti-foam agent DISPELAIR CF246.

35

Latex formulations (1), (2), (3) and (4) were added to
respective millbase/styrene-acrylic dispersion mixtures to

form sample Nos. (A), (B), (C) and (D). Sample No. (D) which contains a standard acrylic latex was used as a control.

- 5 ENR* = epoxidised natural rubber according to GB-A-2 113 692
ENR**= epoxidised natural rubber according to GB-A-2 113 692 with modified catalyst.

EXAMPLE 2:

10

This Example compares the properties of a film formed from an ENR latex with a film formed from a standard acrylic latex and also demonstrates the effect of the degree of epoxidation of a natural rubber latex on the properties of
15 the film. The samples prepared according to Example 1 were used except that in Table 1 the samples were clear films prepared without pigment (TiO₂).

20

TABLE 1

Sample	MFT°C	Yellowing (ΔB) (1 Month, 70°C, dark)	Tack-free at 1 hr	Water Spot at 24 hrs
A	0	5.1	Yes	Good
25 B	<-8	10.3	Yes/No	Good
C	<-8	8.7	Yes	Good
D	-3	0.8	No	Good

TABLE 2

Sample	Tack-free at 1 hr	Water Spot at 24 hrs	Blocking Resistance		Adhesion to Alkyd (% failure)				Adhesion to Low Odour Eggshell (+ Teflon) (% failure)	Thermo-plasticity at 24 hrs
			24 hrs dry	48 hrs wet	Scuffed	dry	wet	Unscuffed		
						dry	wet	dry	wet	
A	Yes	Good	No blocking Moderate damage	No blocking Moderate damage	0	0	0	0	0	No sticking No marking
B	Yes	Good	Slight blocking Moderate damage	Moderate blocking Moderate damage	0	0	0	0	0	No sticking No marking
C	Yes	Good	No blocking Very slight damage	No blocking Very slight damage	0	0	0	0	0	No sticking No marking
D	Yes	Good	Moderate blocking Moderate damage	Moderate blocking Moderate damage	0	50	5	100	100	No sticking No marking

THIS SHEET HAS BEEN
REPLACEDREPLACEMENT SHEET
25 FEB 1997
Date :

The results show in Tables 1 and 2 that films formed from ENR latexes have excellent adhesion, are tackfree at 1 hour and have good water spot and blocking resistance. Moreover, accelerated ageing of films showed no evidence of embrittlement or excessive yellowing, there is efficient film formation down to a temperature of -8°C and films are not thermoplastic when subjected to a temperature of 70°C for 24 hours.

10 COMPARATIVE EXAMPLE

Example 2 of US-A-3 243 401 was repeated exactly as described but replacing palmitic ethoxylate with ocnol ethoxylate, this being more readily commercially available, and yielded an epoxidised latex having an oxirane content of 2.24% (reported value 2.03%).

The relative adhesion properties of the latex prepared according to US-A-3 243 401 was compared with that of an epoxidised natural rubber latex according to the present invention. One sample of latex according to the present invention was coated on to unscuffed aged alkyd film on a wood substrate. Two portions of latex according to Example 2 of US-A-3 243 401 were coated on to two identical aged alkyd films on a wood substrate. One of these samples was cured using commercial urea formaldehyde (BEETLE 610) as described in US-A-3 243 401, the other was uncured.

The results of the adhesion tests are shown in Table 3.

TABLE 3

<u>Adhesion to Alkyd</u>			
	<u>Latex 1</u>	<u>Latex 2</u>	<u>Latex 2 Cured</u>
5 Dry	0%	30%	0%
Wet	0%	80%	0%

The results are expressed as % adhesion failure.

- 10 Latex 1 is latex according to the present invention. Latex 2 is latex according to US-A-3 243 401.

Latex 2 (unlike Latex 1) remains tacky even after 24 hours and requires curing with urea formaldehyde to form a proper
15 paint film.



12

CLAIMS

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date 25 FEB 1997

1. A water-borne coating composition containing as one component a latex of an epoxidised natural rubber.
- 5 2. A composition according to claim 1, where the degree of epoxidation of the natural rubber is at least 10% of the theoretical maximum.
- 10 3. A composition according to claim 2, where the degree of epoxidation of the natural rubber is up to 90% of the theoretical maximum.
- 15 4. A composition according to any one of the preceding claims, where the epoxidised natural rubber comprises at least 15% by weight of the total binder solids content of the composition.
- 20 5. A composition according to claim 4, where the epoxidised natural rubber comprises between 20 and 35% by weight of the total binder solids content of the composition.
- 25 6. A composition according to claim 4, where the epoxidised natural rubber comprises more than 25% by weight of the total binder solids content of the composition.
- 30 7. A composition according to any one of the preceding claims, where the epoxidised natural rubber has a glass transition temperature (T_g) of less than 20°C.
8. A composition according to claim 7, where the epoxidised natural rubber has a T_g of less than 0°C.
- 35 9. Use of a latex of an epoxidised natural rubber as a component of a water-borne coating composition.

This Sheet Has Been Replaced





13

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date: 25 FEB 1997

10. Use of a latex of an epoxidised natural rubber as an adhesion promoter in a water-borne coating composition.

5 11. A process for preparing a water-borne coating composition which comprises mixing a latex of an epoxidised natural rubber as defined in any one of claims 1 to 8 with other components of a coating composition.

10 12. A method of coating a substrate which comprises applying to the surface of the substrate to be coated a water-borne coating composition as claimed in any one of claims 1 to 8 and allowing the composition to dry at ambient temperature and to form a film.

15

This Sheet Has Been Replaced



ABSTRACTCOATING COMPOSITIONCONTAINING EPOXIDISED RUBBER

5 A water-borne coating composition contains as one component a latex of an epoxidised natural rubber. The composition has a low minimum film-forming temperature (MFT), and produces films which are hard, durable and display excellent adhesion to substrate.

10

15

20

25

30

35

REPLACEMENT SHEET

Date: 27 MAR 1997

- 9 -

~~DOR 27103/97~~

TABLE 2

Sample	Track-free at 1 hr	Water Spot at 24 hrs	Blocking Resistance		Adhesion to Alkyd (% failure)				Adhesion to Low Odour Eggshell (+ Teflon) (% failure)	Thermo-plasticity at 24 hrs
			24 hrs dry	48 hrs wet	Scuffed		Unscuffed			
					dry	wet	dry	wet		
A	Yes	Good	No blocking Moderate damage	No blocking Moderate damage	0	0	0	0	0	No sticking No marking
B	Yes	Good	Slight blocking Moderate damage	Moderate blocking Moderate damage	0	0	0	0	0	No sticking No marking
C	Yes	Good	No blocking Very slight damage	No blocking Very slight damage	0	0	0	0	0	No sticking No marking
D	Yes	Good	Moderate blocking Moderate damage	Moderate blocking Moderate damage	0	50	5	100	100	No sticking No marking

06 NOV 1997
Date:.....

films are relatively resistant to yellowing and embrittlement. Moreover, films are tough and resistant to mechanical damage. As compared with coatings based on the most up-to-date acrylic latex systems, the epoxidised natural rubber systems produce coating films which are equally mechanically durable but are far more tenacious in their adhesion to substrate surfaces. Hence, in contrast to acrylic-based paint systems they can be used as a film-former in a coating composition without the need for an adhesion promoter.

US-A-3 243 401 is concerned with latexes of epoxidised conjugated diene polymers having an epoxy equivalent weight of 2000 to 200. The epoxidised polymers illustrated in the Examples are synthetic copolymers. The latexes have many uses as binders in paper and fabric production and processing. In use these binders need to be cured with a cross-linking agent, in particular a urea formaldehyde derivative.

Certain epoxidised rubber derivatives are known. A particularly effective process for their preparation has been described in GB-A-2 113 692. They are used substantially exclusively as raw materials for vulcanisation and hence for the manufacture of hard rubber goods such as rubber seals and tyres. Their use as a component in water-borne paints is unknown.

In the present context the term "rubber" in the phrase "epoxidised natural rubber" is used to mean rubber latex as found in nature.

Accordingly in one aspect, the present invention provides a water-borne coating composition suitable for use in forming a protective or decorative coating on a substrate of a type which is allowed to dry at ambient temperatures in which one component of the composition is an epoxidised natural rubber having

- a. a degree of epoxidation of from 50 to 90% of the theoretical maximum number of double bonds available for epoxidation in the natural rubber and
 - b. a glass transition temperature (T_g) of less than 20°C
- and wherein the natural rubber has a naturally occurring molecular weight.

In a further aspect, the invention provides a water-borne coating composition suitable for use in forming a protective or decorative coating on a substrate of a type which is allowed to dry at ambient temperatures which composition has a binder solids content of which one component is selected from the group of standard film-forming resins consisting of acrylate polymers and copolymers, methacrylate polymers and copolymers, vinyl ester polymers and copolymers and copolymers of styrene and butadiene and another component of the binder solids content amounting to at least 15 wt% of the binder solids content is an epoxidised natural rubber having

- c. a degree of epoxidation of at least 15% of the theoretical maximum number of double bonds available for epoxidation in the natural rubber and
 - d. a glass transition temperature (T_g) of less than 20°C
- and wherein the natural rubber has a naturally occurring molecular weight.

The percentage of epoxidation referred to here is as defined in GB-A-2 113 692.

The function that the epoxidised natural rubber performs in the paint depends upon the proportion that it makes up of the total binder solids content of the compositions. At lower levels, for example 15% by weight or more (up to 20% or up to 25% by weight), the resins are surprisingly touch dry even though the epoxidised natural rubber has a low minimum film forming temperature (MFT). At higher levels, for example 50% by weight of total binder solids, the films formed have tenacious adhesion.

The paints prepared according to this invention will in general be formulated with another resin as part of the total film-former.

Standard film-forming resins for use in the present invention are generally stable dispersions of polymer particles in water.

As is indicated above, examples of classes of such polymers are acrylate and methacrylate polymers and co-polymers and vinyl ester polymers and co-polymers and styrene and butadiene co-polymers.

Examples of acrylate polymers are polymers of C_{1-8} alkyl esters of acrylic and methacrylic acid. Examples of such acrylate esters are methyl acrylate, ethyl acrylate, butyl acrylate, hexyl acrylate, 2-ethylhexyl acrylate and octyl acrylate.



Date 06 NOV 1997.....

WHAT WE CLAIM IS:

1. A water-borne coating composition suitable for use in forming a protective or decorative coating on a substrate of a type which is allowed to dry at ambient temperatures in which one component of the composition is an epoxidised natural rubber having

- a. a degree of epoxidation of from 50 to 90% of the theoretical maximum number of double bonds available for epoxidation in the natural rubber and
- b. a glass transition temperature (Tg) of less than 20°C

and wherein the natural rubber has a naturally occurring molecular weight.

2. A water-borne coating composition suitable for use in forming a protective or decorative coating on a substrate of a type which is allowed to dry at ambient temperatures which composition has a binder solids content of which one component is selected from the group of standard film-forming resins consisting of acrylate polymers and copolymers, methacrylate polymers and copolymers, vinyl ester polymers and copolymers and copolymers of styrene and butadiene and another component of the binder solids content amounting to at least 15 wt% of the binder solids content is an epoxidised natural rubber having

- a. a degree of epoxidation of at least 15% of the theoretical maximum number of double bonds available for epoxidation in the natural rubber and
- b. a glass transition temperature (Tg) of less than 20°C

and wherein the natural rubber has a naturally occurring molecular weight.

3. A composition as claimed in claim 1 or claim 2 wherein the epoxidised natural rubber has a Tg of less than 0°C.

4. A composition as claimed in any one of claims 1 to 3 wherein the composition has a minimum film-forming temperature of below -8°C.



- 13 -

REPLACEMENT SHEET

Date: 06 NOV 1997

5. A composition as claimed in any one of claims 1 to 4 wherein the composition is without co-solvent for the water.
6. A composition according to claim 2 wherein up to 50 wt% of the binder solids content is epoxidised natural rubber.
7. A composition according to claim 2 wherein the epoxidised natural rubber has a degree of epoxidation of from 50 to 90% of the theoretical maximum number of double bonds available for epoxidation in the natural rubber.
8. A composition as claimed in any one of the preceding claims which additionally contains pigment and/or extender.
9. A water-borne coating composition as defined in claim 1 or claim 2 substantially as herein described with reference to any example thereof.

**THIS SHEET HAS BEEN
REPLACED**

ABSTRACT

COATING COMPOSITION (CONTAINING EPOXIDISED RUBBER)

A water-borne coating composition contains as one component a latex of an epoxidised natural rubber. The composition has a low minimum film-forming temperature (MFT), and produces films which are hard, durable and display excellent adhesion to substrate.

This Sheet Has Been Replaced

