

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
13 June 2002 (13.06.2002)

PCT

(10) International Publication Number
WO 02/46729 A1

(51) International Patent Classification⁷: **G01N 23/083**

(21) International Application Number: PCT/US01/47540

(22) International Filing Date: 5 December 2001 (05.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/731,335 6 December 2000 (06.12.2000) US

(71) Applicant: **GENRAD, INC.**, [US/US]; 7 Technology Park Drive, Westford, MA 01886-0033 (US).

(72) Inventor: **THAYER, Dale**; 14850 Werris Creek Lane, San Diego, CA 92128 (US).

(74) Agents: **SAMPSON, Matthew, J.** et al.; McDonnell, Boehnen, Hulbert & Berghoff, Suite 3200, 300 South Wacker Drive, Chicago, IL 60606 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OFF-CENTER TOMOSYNTHESIS



162162

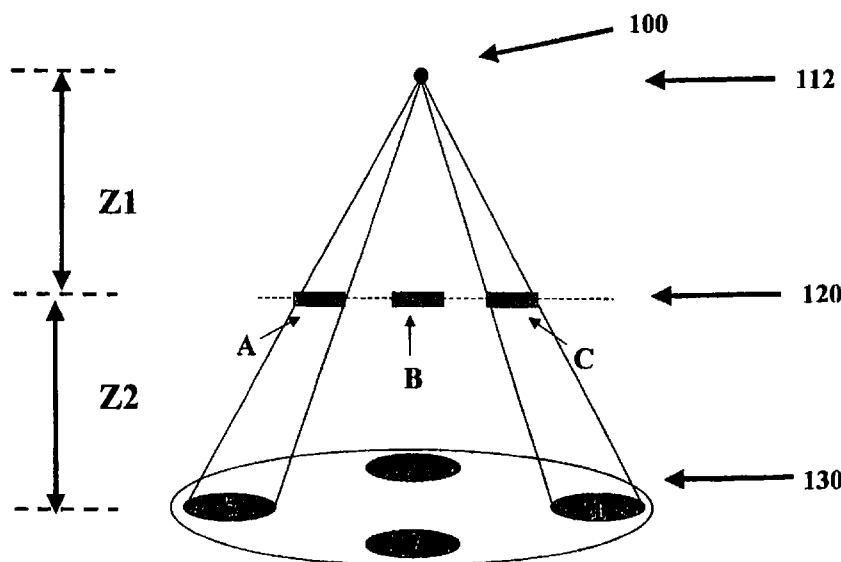

(57) **Abstract:** The present invention is directed to an apparatus and method for acquiring off-axis X-ray images of a plurality of regions of interest. The apparatus includes a source (112) producing a beam of radiation, a surface (120) to support at least a subset of the plurality of regions of interest (A, B, C), and an X-ray detector (130) located to simultaneously receive portions of the beam that have passed through the subset of the plurality of regions of interest. The X-ray detector produces from the received portions of the beam an electronic representation of an image for each region of interest in the subset of the plurality or regions of interest. Any combination of the source, the surface, and the detector may be moveable to position the regions of interest within the beam.

WO 02/46729 A1