



- (51) **International Patent Classification:**
F16B 15/00 (2006.01)
- (21) **International Application Number:**
PCT/US2012/048309
- (22) **International Filing Date:**
26 July 2012 (26.07.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/513,845 1 August 2011 (01.08.2011) US
- (71) **Applicant (for all designated States except US):** PEM
MANAGEMENT, INC. [US/US]; 103 Foulk Road, Suite
108, Wilmington, Delaware 19803 (US).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** MALONEY, Michael
[US/US]; 5480 Silo Hill Road, Doylestown, Pennsylvania
18902 (US).
- (74) **Agent:** GORE, Gregory J.; Cavella & Associates, 70
West Oakland Avenue, Suite 316, Doylestown,
Pennsylvania 18901 (US).


(81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** MINIATURE TACK PINS

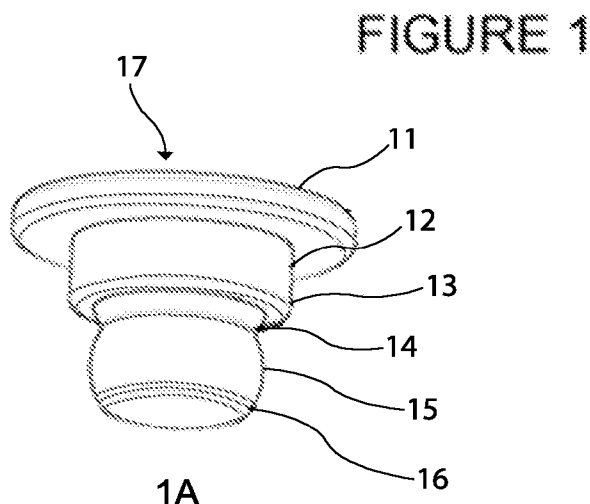

(57) **Abstract:** A fastener pin has a head at a topmost end that is the greatest diameter of the fastener. A shoulder extends downward from the head and includes a bottom surface for displacing material of a host object. A broaching section of rectangular lateral cross-section is located immediately below the displacer by cutting a rectangular profile into a round installation hole in the host object. Immediately below the broaching section is a tapered tip at a bottommost end which may be in the shape of a rectangular pyramid rotated radially out of alignment with the remainder of the other fastener features which all have parallel side edges. This individual fastener is one of a series of substantially identical pins attached toe-to-head at severable joints in a continuous string of fasteners.