(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/019314 A1

(51) International Patent Classification[7]: G09G 3/32

(21) International Application Number:
PCT/JP2003/010644

(22) International Filing Date: 22 August 2003 (22.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-245444 26 August 2002 (26.08.2002) JP

(71) Applicant *(for all designated States except US)*: **CASIO COMPUTER CO., LTD.** [JP/JP]; 6-2, Hon-machi 1-chome, Shibuya-ku, Tokyo 151-8543 (JP).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **YAMADA, Hiroyasu** [JP/JP]; 2-11-5-502, Bessho, Hachioji-shi, Tokyo 192-0363 (JP). **SHIRASAKI, Tomoyuki** [JP/JP]; 1-1425-3-234, Sakuragaoka, Higashiyamato-shi, Tokyo 207-0022 (JP).

(74) Agents: **SUZUYE, Takehiko** et al.; c/o SUZUYE & SUZUYE, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

[Continued on next page]

(54) Title: DISPLAY DEVICE AND DISPLAY DEVICE DRIVING METHOD

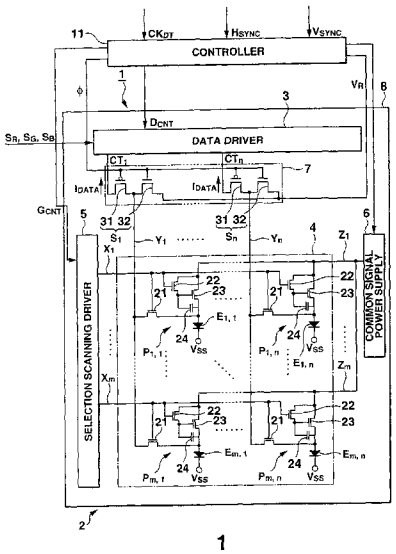

1

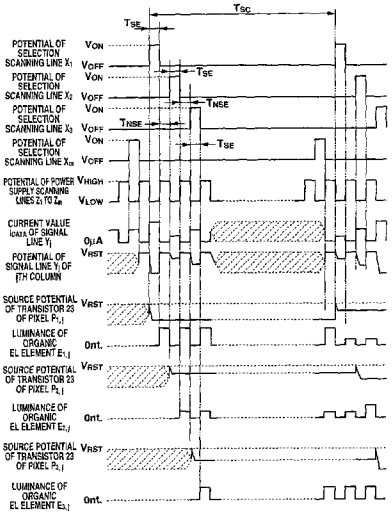

8

(57) Abstract: A display device includes a plurality of scanning lines(X_1- X_m), a plurality of signal lines (Y_1 - Y_n), a scanning driver (5) which sequentially supplies to the scanning lines selection signals that select the scanning lines, a data driver (3) which supplies a designation current to the plurality of signal lines duringwithin a selection period when the scanning lines are being selected, a plurality of pixel circuits which supplies a driving current corresponding to a current value of the designation current that flows to the signal lines, a plurality of optical elements (E1,1 - $E_{m,n}$) which emit light in accordance with the driving current supplied by the plurality of pixel circuits and a power supply (6) which outputs to the plurality of pixel circuits a driving current reference voltage to supply the driving current.

WO 2004/019314 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.