

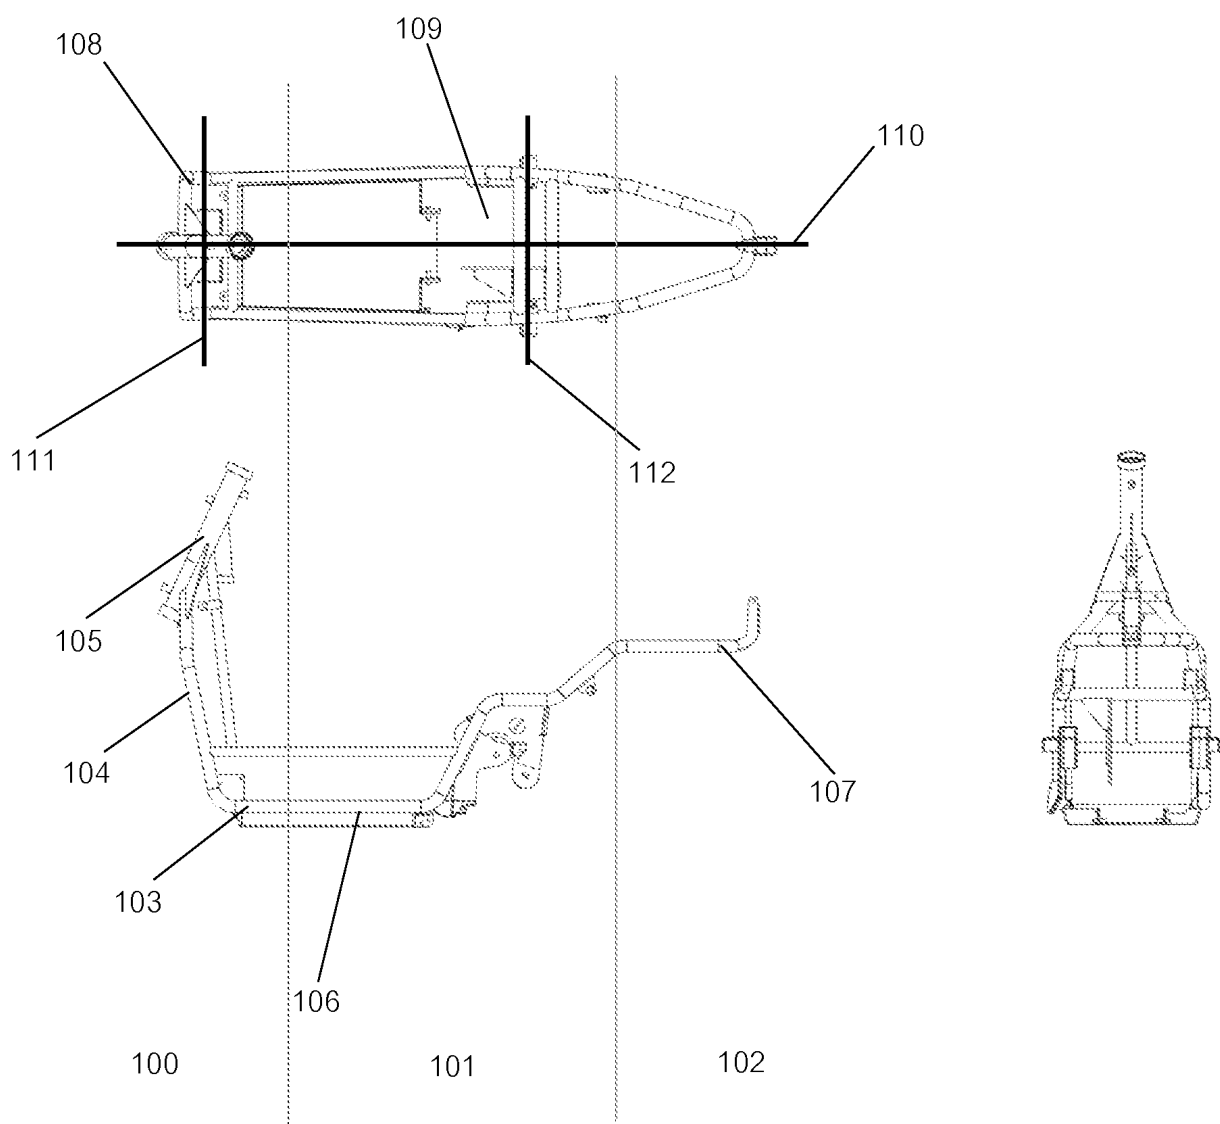


Fig.1

9. The structure according to any one of claims 6 - 7, inclusive, wherein the 5 mm, the smallest size, mounting bolt must have a minimum proof load of less than or equal to 225×10^6 Pascal and must withstand a minimum tensile strength of at least 400×10^6 Pascal.
10. The structure according to claim 9 wherein the bolt size can be larger than 5 mm, with
5 corresponding changes in the minimum proofload and the minimum tensile strength.
11. The structure according to claim 1 wherein the motorcycle comprises ordinary motorcycles (with internal combustion engines), electric motorcycles and hybrid motorcycles.