

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/16984 A1

(51) International Patent Classification⁷: **H01H 71/46**

(21) International Application Number: PCT/IB00/01203

(22) International Filing Date: 29 August 2000 (29.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/386,329 30 August 1999 (30.08.1999) US

(71) Applicant: **EATON CORPORATION** [US/US]; Eaton Center, 111 Superior Avenue, Cleveland, OH 44114 (US).

(72) Inventor: **CONWAY, Christopher, J.**; 4461 Laurel Oak Drive, Allison Park, PA 15101 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CIRCUIT BREAKER WITH TWO PIECE BELL ACCESSORY LEVER WITH OVERTRAVEL

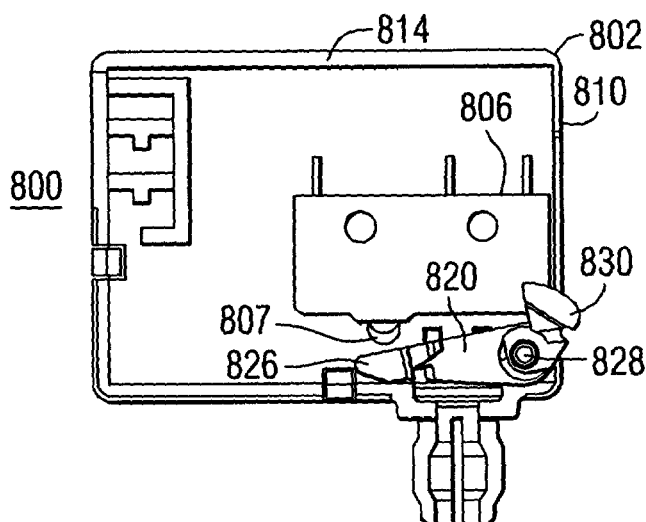

(57) Abstract: A circuit interrupter with an accessory case socket into which an accessory bell alarm member is disposed. A two-piece lever arrangement is provided in the bell alarm accessory case between the micro-switch button thereof and the operating mechanism of the circuit breaker. In the first stage of operation the operating mechanism rotates the entire two-piece member as a unit until the bell alarm button has been completely depressed, after which overtravel of the operating mechanism is accommodated by rotational movement of only one of the members on a common axis against the force of a hub located torsion spring.



WO 01/16984 A1