

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 February 2008 (28.02.2008)

PCT

(10) International Publication Number
WO 2008/024687 A2

(51) International Patent Classification:
G11B 5/54 (2006.01)

DEXTER, David, D. [US/US]; 7616 Pismo Beach Circle,
Goleta, CA 93117 (US).

(21) International Application Number:
PCT/US2007/076239

(74) Agent: **GESS, Albin, H.**; Snell & Wilmer LLP, 600 Anton
Boulevard, Suite 1400, Costa Mesa, CA 92626 (US).

(22) International Filing Date: 17 August 2007 (17.08.2007)

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/508,083 22 August 2006 (22.08.2006) US

(71) Applicant (*for all designated States except US*): **INTRI-PLEX TECHNOLOGIES, INC.** [US/US]; 751
South Kellogg Avenue, Santa Barbara, CA 93117 (US).


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **HANRAHAN, Kevin, P.** [US/US]; 5045 Via Lara Lane, Santa Barbara, CA 93111 (US). **SCHMIDT, Ryan, J.** [US/US]; 2315 Wellington Avenue, Santa Barbara, CA 93105 (US).

[Continued on next page]

(54) Title: TOLERANCE RING FOR DATA STORAGE WITH CUT-OUT FEATURE FOR MASS CONTROL

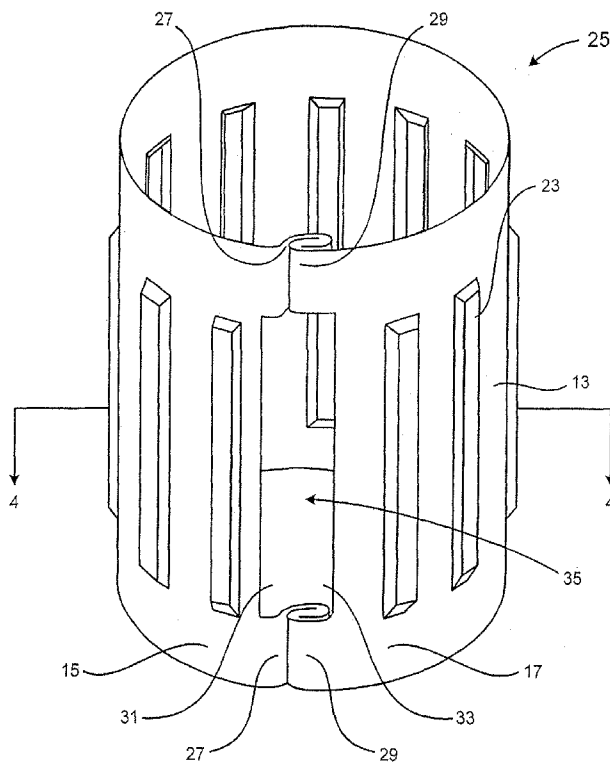

(57) Abstract: A tolerance ring configured to improve mass eccentricity of an actuator arm assembly. The tolerance ring has a cylinder with a predetermined length between two ends, with a gap along the predetermined length of the cylinder, the gap having a first and a second edge, the cylinder having an aperture in the surface of the cylinder at the second edge.



PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

Declaration under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))*