



(43) International Publication Date
8 October 2015 (08.10.2015)

- (51) International Patent Classification:
G08B 13/04 (2006.01) *G08B 13/22* (2006.01)
- (21) International Application Number:
PCT/SG2015/000109
- (22) International Filing Date:
31 March 2015 (31.03.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/972,545 31 March 2014 (31.03.2014) US
62/097,143 29 December 2014 (29.12.2014) US
- (71) Applicant: GLASS SECURITY PTE LTD [SG/SG]; 2 Orchard Link, #4-1, Singapore 237978 (SG).
- (72) Inventor: LIM, Luke; c/o Glass Security Pte Ltd, 2 Orchard Link, #4-1, Singapore 237978 (SG).
- (74) Agent: TAN, Wen-Min, Desmond; Marks & Clerk Singapore LLP, Tanjong Pagar, P.O. Box 636, Singapore 910816 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A TAMPER DETECTION DEVICE AND A METHOD FOR INSTALLING THE DEVICE

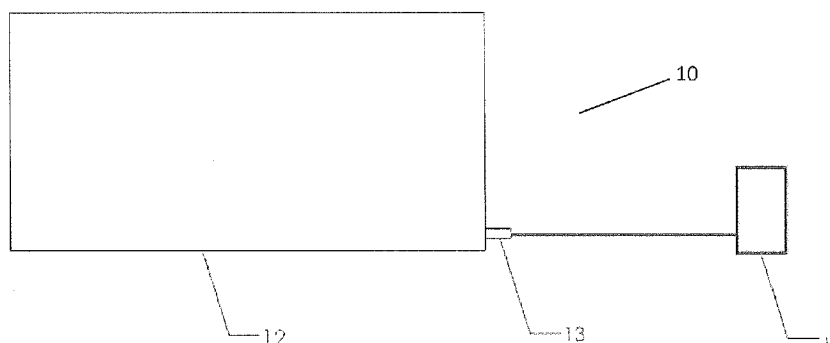


Figure 1

(57) Abstract: There is provided a tamper detection device comprising a laminate; a contact lead attached to the laminate; and a detection module connected to the contact lead. It is advantageous that the laminate is configured to conform to an application surface, and to move the contact lead. A method of installing the device is also disclosed.