

FIG. 1

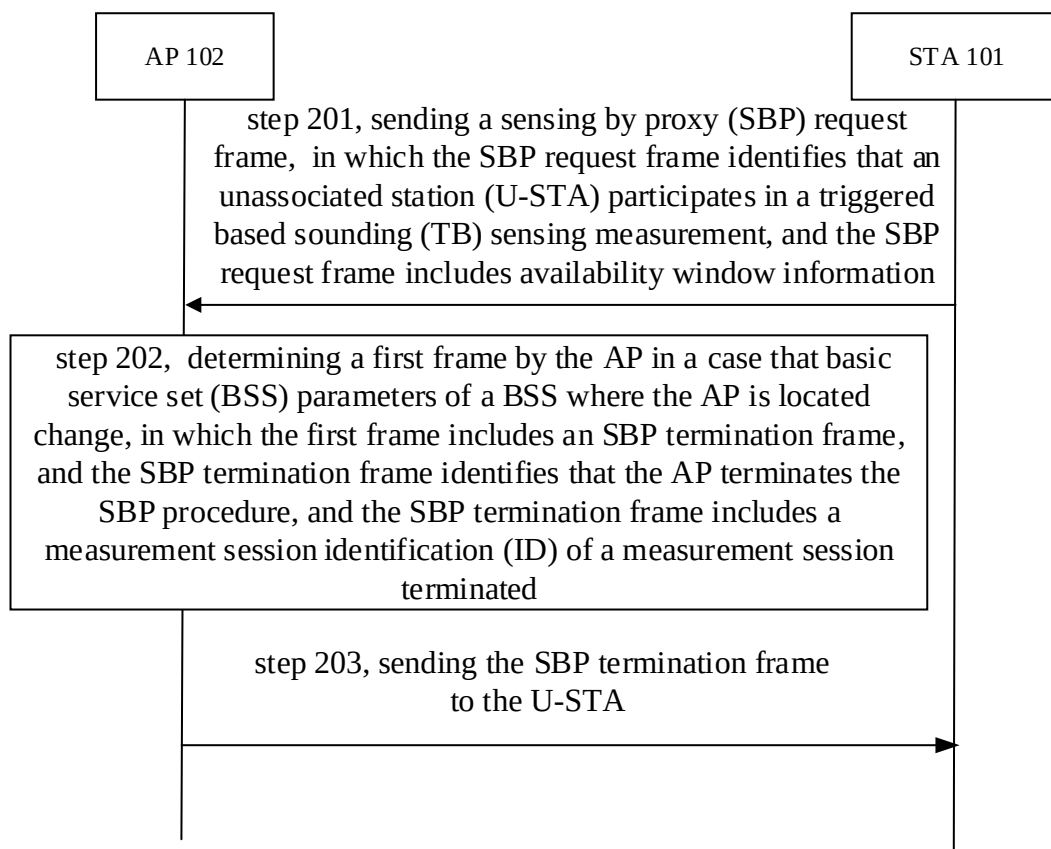


FIG. 2

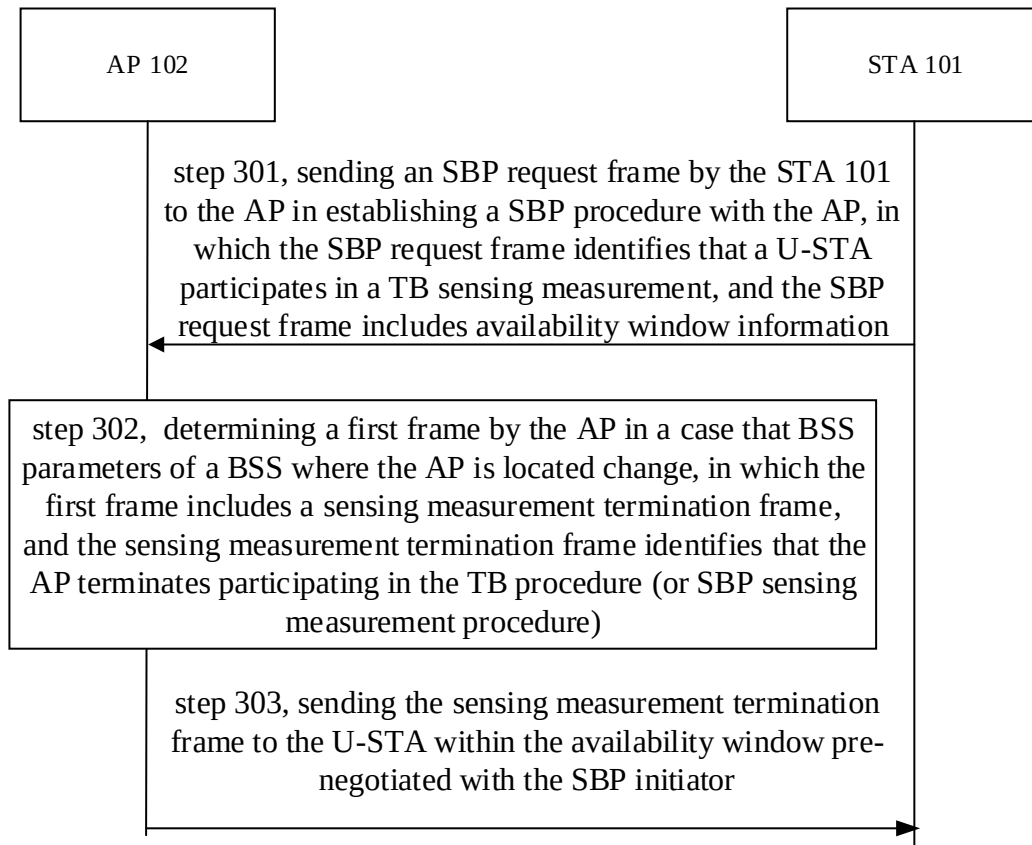


FIG. 3

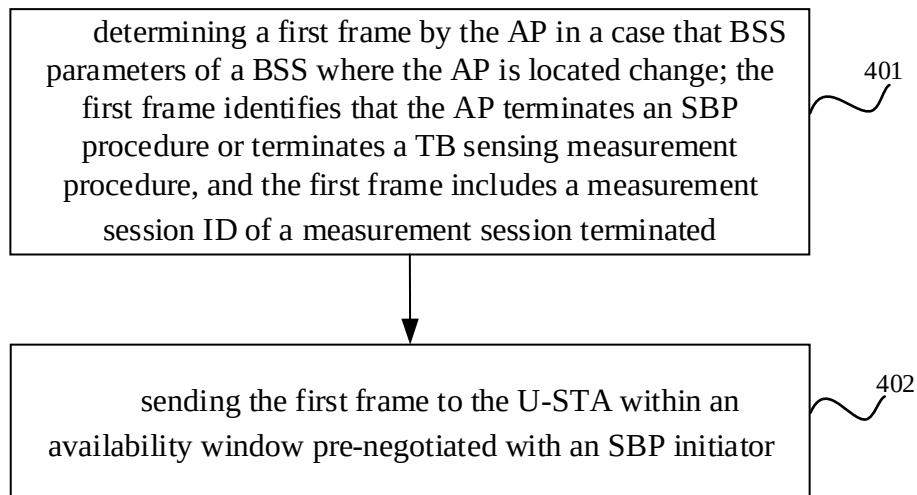


FIG. 4

receiving the first frame by the STA within an availability window pre-negotiated with an SBP initiator, in which the first frame includes an SBP termination frame or a sensing measurement termination frame,

in which the first frame identifies that BSS parameters of a BSS where an AP is located change and the AP terminates an SBP procedure or terminates a TB sensing measurement procedure; the first frame includes a measurement session ID of a measurement session terminated; and the STA is a U-STA of the AP, and the U-STA participates in a TB sensing measurement

501

FIG. 5

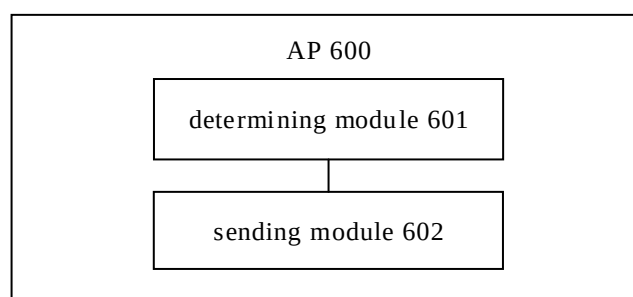


FIG. 6

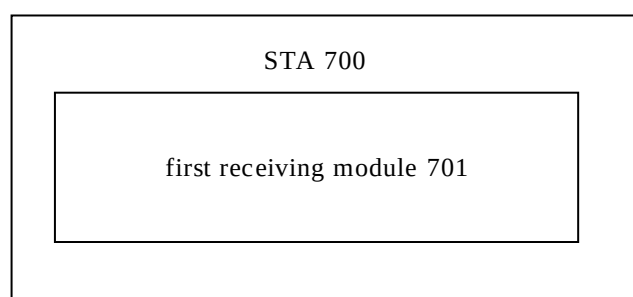


FIG. 7

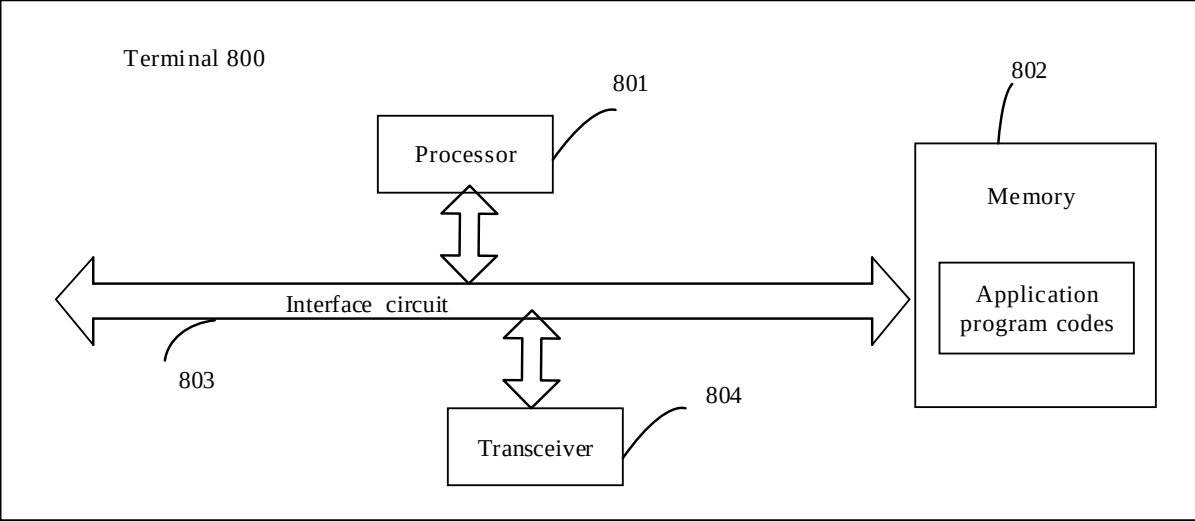


FIG. 8

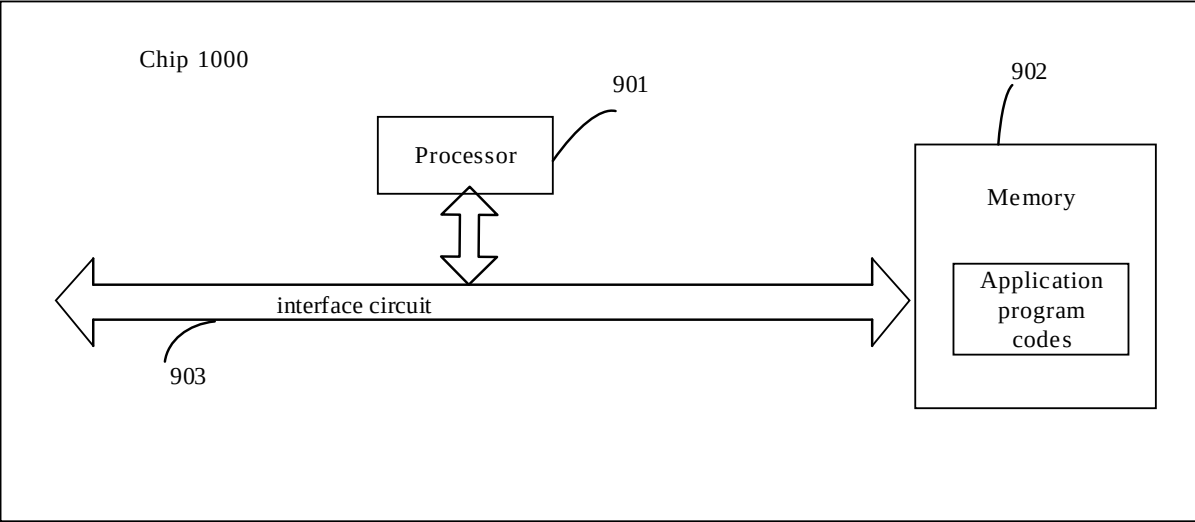


FIG. 9