



(51) International Patent Classification:
B65G 47/76 (2006.01)

(21) International Application Number:
PCT/US2010/055990

(22) International Filing Date:
9 November 2010 (09.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/281,128 13 November 2009 (13.11.2009) US
61/323,131 12 April 2010 (12.04.2010) US

(71) Applicant (for all designated States except US): **DE-MATIC CORP.** [US/US]; 507 Plymouth Ave., N.E., Grand Rapids, MI 49505 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BUTLER, Floyd, W.** [US/US]; 8040 Linden Avenue, Newaygo, MI 49337 (US). **WETTERS, Paul, L.** [US/US]; 7989 Tiffany Avenue, N.E., Rockford, MI 49341 (US). **KREYS, Paul (NMI)** [US/US]; 1247 Camille Drive, Grand Rapids, MI 49546 (US). **KOOISTRA, Kenneth, J.** [US/US]; 3050 Rush Creek Drive, Byron Center, MI 49315 (US). **SCHUITEMA, Dennis, J.** [US/US]; 4810 Giles Rd., N.E., Ada, MI 49301 (US).

(74) Agent: **VAN DYKE, GARDNER, LINN & BURKHART, LLP**; and its individual attorneys, primarily, Frederick S. Burkhart, 2851 Charlevoix Dr., S.E., Suite 207, P.O. Box 888695, Grand Rapids, Michigan 49588-8695 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CONVEYOR SYSTEM AND METHOD OF Laterally Displacing Articles

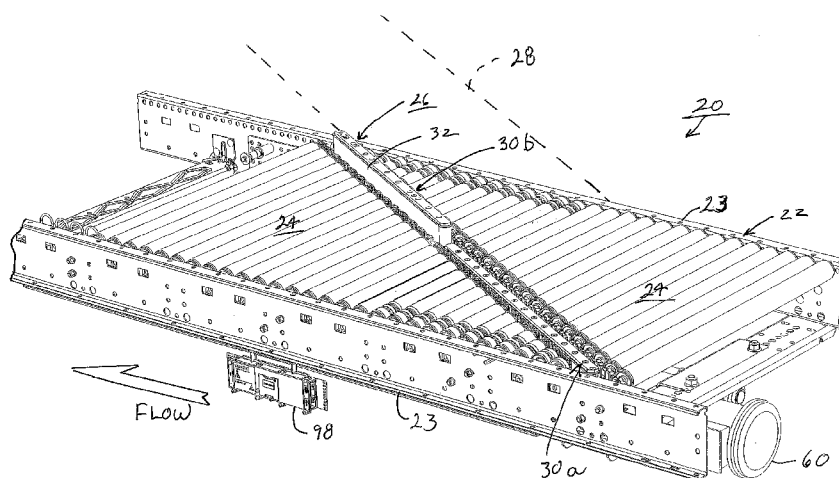


Fig 1

(57) Abstract: A conveyor system and method of laterally displacing articles includes a conveyor defining a conveying surface and conveying articles in a longitudinal direction with the conveying surface. A diverting assembly is positioned diagonally at least partially across the conveying surface. The diverting assembly travels generally vertically between a non-actuated position below the conveying surface and an actuated position extending above the conveying surface. The diverting assembly has a diverting surface that is adapted to laterally displace articles on the conveying surface when in the actuated position.

