



(51) International Patent Classification:

B62D 55/10 (2006.01) B60K 17/04 (2006.01)
B62D 55/125 (2006.01) B62D 55/14 (2006.01)
B60K 7/00 (2006.01)

(21) International Application Number:

PCT/SE2022/050288

(22) International Filing Date:

24 March 2022 (24.03.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2150354-5 25 March 2021 (25.03.2021) SE

(71) Applicant: BAE SYSTEMS HÄGGLUNDS AKTIEBO-
LAG [SE/SE]; 891 82 Örnsköldsvik (SE).

(72) Inventors: THORÉN, Max; Tjärn 117, 891 92 Örn-
sköldsvik (SE). HELLHOLM, Björn; Sjöbodvägen 115,
891 96 Arnäsvall (SE). KORTZ, Philip; Brushanvägen
17, 891 40 Örnsköldsvik (SE).

(74) Agent: ZACCO SWEDEN AB; P.O. Box 5581, Val-
hallavägen 117N, 114 85 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH,
KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM,

(54) Title: TRACK ASSEMBLY FOR A TRACKED VEHICLE

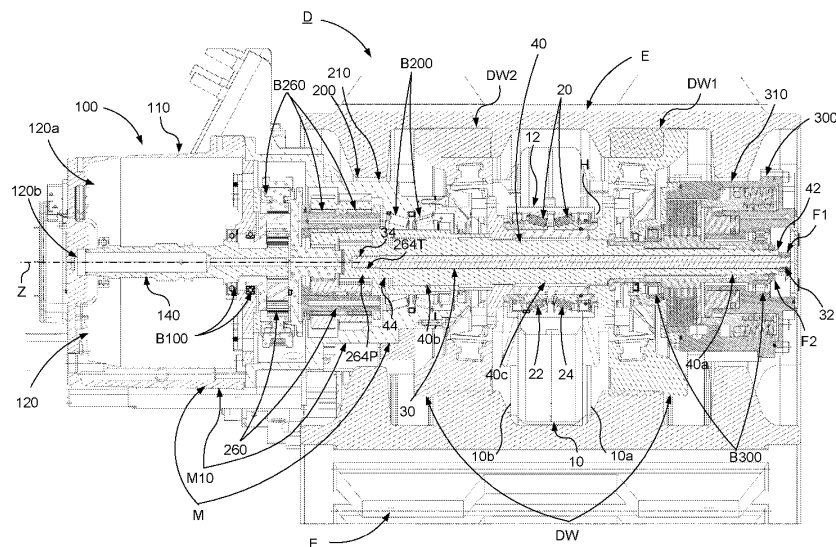


Fig. 6

(57) Abstract: The invention relates to a track assembly (T1, T2) for a tracked vehicle (V). Said track assembly comprises a track support beam (10) configured to support road wheels (RW), a drive wheel member (DW), and a drive arrangement (D) for drive wheel member operation and an endless track (E) disposed around said road wheels (RW) and drive wheel member (DW). Said drive arrangement (D) comprises a motor device (100) for driving said drive wheel member (DW), a transmission device (200) for transferring torque from said motor device (100) to said drive wheel member (DW) and a brake arrangement (300) for braking the drive wheel member (DW). Said drive arrangement (D) is configured to be coaxially arranged relative to a centre axis (Z) of said drive wheel member (DW). A bearing configuration (20) is arranged in said track support beam (10), said drive arrangement (D) being configured to be journaled in bearings to said bearing configuration (20) for allowing rotation of said drive wheel member relative to said track support beam (10)

[Continued on next page]

TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

and for supporting said drive arrangement (D).