

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/033103 A3

(51) International Patent Classification⁷: **B32B 1/02**,
B65D 85/86, 85/90

(74) Agents: **CHRISTENSEN, Douglas, J.** et al.; Patterson,
Thuente, Skaar & Christensen, P.A., 4800 IDS Center, 80
South Eighth Street, Minneapolis, MN 55402-2100 (US).

(21) International Application Number:
PCT/US2003/032197

(22) International Filing Date: 9 October 2003 (09.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/417,150 9 October 2002 (09.10.2002) US

(71) Applicant (for all designated States except US): **ENTE-
GRIS, INC.** [US/US]; 3500 Lyman Boulevard, Chaska,
MN 55318 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **EXTRAND,
Charles, W.** [US/US]; 408 East Minnehaha Parkway, Min-
neapolis, MN 55419 (US). **BUCHA, Robert** [US/US];
6372 Smithtown Road, Excelsior, MN 55331 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: HIGH TEMPERATURE, HIGH STRENGTH, COLORABLE MATERIALS FOR DEVICE PROCESSING SYSTEMS

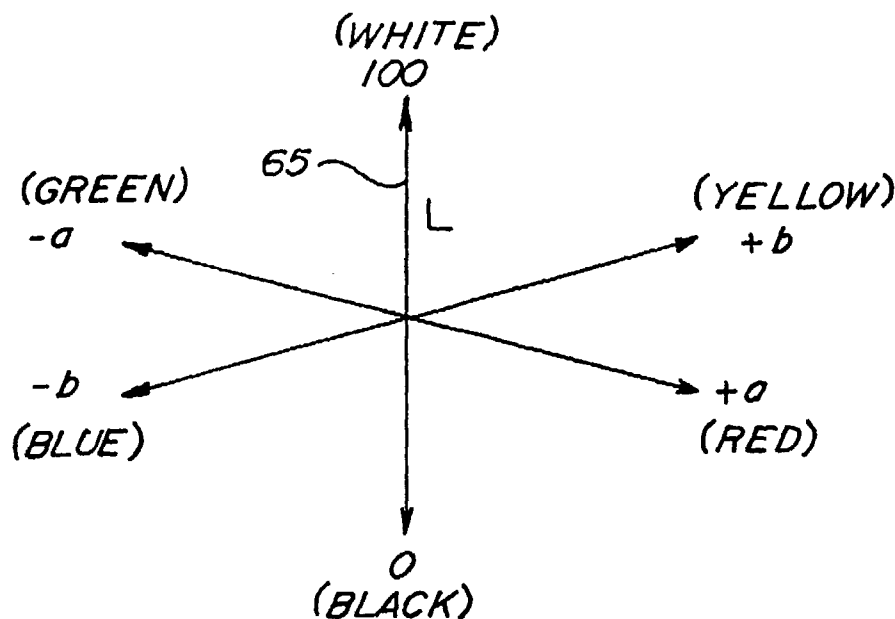

(57) Abstract: Electrostatic-discharge safe devices for processing electronic components, e.g., matrix trays, chip trays, and wafer carriers are disclosed that are made from a mixture of a high temperature, high strength polymer and at least one metal oxide, and optionally with at least one pigment. The use of the metal oxides as conductive materials advantageously allows for light-colored electrostatic-discharge safe materials to be made. Such materials may be colored with pigments without compromise of material performance specifications.

WO 2004/033103 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Previous Correction:

see PCT Gazette No. 48/2004 of 25 November 2004, Section II

(88) Date of publication of the international search report:

24 February 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction: