

Description

This invention relates to coating mastic and caulking compositions and to composite articles manufactured with such compositions. In particular it relates to architectural coating mastic and caulking compositions and to roof coating mastics.

Architectural mastic and caulking compositions are used in a wide variety of applications to seal and protect architectural material substrates and to seal and protect joints and other openings in architectural materials. They are used in both interior and exterior applications, and in both cases are exposed to conditions such as moisture, sunlight, temperature variations, etc. that require such compositions to have a balance of properties enabling them to perform their intended functions for extended periods of time. Typically, mastics and caulks must be fluid or semi-fluid compositions which are stable, high solids content formulations usually having a total solids content of about 60 weight percent or more. They should have permanent low temperature flexibility when cured, particularly in the case of mastic compositions intended for exterior application. Both the mastics and caulks should have sufficient wetting ability to readily wet, cover and adhere to even the most hydrophobic architectural substrates such as polyurethane, ethylenepropylene-diene interpolymer materials, and the like. Very low residual surface tack is generally required in cured mastics and caulks, and they should quickly become non-tacky shortly after application to prevent adherence of dust, dirt or other materials. High tensile strength is also required, particularly for mastics intended to protect vulnerable exterior materials such as foamed polyurethane insulation. High tensile strength provides improved puncture and tear resistance in the cured coating or caulk and overall protection of the substrates of architectural joint at both high and low temperatures since tensile strength ensures against cracking or separation as a result of thermal expansion (as well as relative motion from other causes). While compositions intended for exterior use can be clear, they are often pigmented, particularly in the case of protective roof coatings with opaque reflective pigments such as titanium oxide and zinc oxide. They also preferably are good reflectors and heat radiators to minimize temperature extremes. High adhesion to all varieties of architectural construction materials is also desirable and is especially important in some roofing applications which employ relatively hydrophobic roofing materials such as foamed polyurethane insulation and ethylenepropylene-diene interpolymer coatings. High adhesion to other structural materials such as wood, concrete, metals, glass and other materials is also desirable to enable flexibility of use. Exterior coatings also should be resistant to weather and, in particular, should have good "wet adhesion" and resistance to oxidation, ultraviolet radiation and air pollutants found in industrial and urban areas. Water impermeability and resistance (low absorption) are essentially universal requirements of both exterior and interior mastics and caulks and are particularly important for use in areas exposed to water such as kitchens and bathrooms.

Physical stability of the cured composition is also a relatively high priority in essentially all applications, and that is particularly true for exterior mastics and caulks which must be resistant to creep at high temperatures and excessive shrinking at cold temperatures, the latter of which can promote cracking and separation from substrate.


In addition to all the foregoing requirements, it is also desirable that caulks and mastics be relatively easy to manufacture in the absence of expensive and/or toxic materials. For instance, water base mastics and caulks are much preferred over solvent compositions due to the added expense, pollution, toxicity, and fire hazards associated with the use of solvents. Furthermore, previous investigators have found that many of the above noted desirable physical and chemical properties can be achieved by the use of compositions which contain potentially toxic monomers, catalysts or cross-linking agents which improve the strength of the mastic or caulk binder (usually a synthetic polymer). Thus, N-methylolamide-functional monomers and other crosslinking monomers and agents are known to improve polymer performance in mastics and caulks in several respects. However, many of the useful cross-linking monomers and agents release toxic materials upon curing and can result in the presence of toxic residues in the finished article. For instance, N-methylolamide-containing polymers release formaldehyde when cured and they can result in formaldehyde residues in the finished mastic or caulk. Formaldehyde release and residues are often undesirable since formaldehyde is coming under ever increasing scrutiny in both the work place and home, and the State and Federal Occupational Health and Safety Administrations (OSHA) have set stringent formaldehyde exposure limits for industrial workers.

The polymer binders, particularly those employed in water base mastics and caulks, should have rheological properties sufficient to provide adequate stability to the heavily solids-loaded compositions and suitable cohesive and wetting properties to enable ease of application. Polymer latex viscosity and wetting ability are both influenced significantly by binder polymer composition and can limit latex utility by restricting filler loading level, substrate wetting ability, and the ease of mastic or caulk application.

Thus, it can be seen that the physical and chemical properties required in mastic and caulking compositions, in articles coated or sealed with such compositions, and in the polymer solutions or dispersions used in the manufacture of mastics and caulks, place various, sometimes conflicting, demands on polymer binder compositions and on the polymer carrier (i.e., solvent or water). Hence, it is desirable to obtain a polymer system, preferably a water-base polymer emulsion, which possesses a balance of properties suitable for the manufacture of architectural mastics and caulking compositions and of articles coated or sealed with such compositions.

SUMMARY OF THE INVENTION

It is now been found that coating mastics and caulking compositions having an improved balance of properties can be obtained by employing as the binder a water-insoluble polymer having a T_g of -50°C . to -10°C . which remains permanently flexible and non-tacky when cured and which comprises at least one functional monomer of the formula



in which R_1 is a divalent organic radical of at least 3 atoms in length, R_5 and R_6 are independently selected from hydrogen, hydroxy, halo, thio, amino or monovalent organic radicals, and X is $-\text{CO}-\text{R}_4$ or $-\text{CN}$, wherein R_4 is hydrogen or a monovalent organic radical, and said polymer is selected from the group consisting of

(a) conjugated diolefin polymers comprising at least 30 weight percent of one or more conjugated diene monomers having 4 to 8 carbon atoms and 0 to 70 weight percent of one or more alkenyl substituted monoaromatic monomers;

(b) olefin-ester interpolymers comprising at least 1 weight percent of a monoolefin monomer having up to 4 carbon atoms and at least 40 weight percent of an alkenyl or alkenol ester of a saturated carboxylic acid;

(c) olefinically unsaturated carboxylic acid ester polymers comprising at least 40 weight percent polymerized olefinically unsaturated carboxylic acid ester monomers;

(d) alkenyl ether polymers comprising at least 30 weight percent alkenyl ether monomer units; and
(e) combinations thereof.


The mastic and caulking compositions comprise 60 to 90 weight percent total undissolved solids, which solids content comprises at least 15 weight percent of said water insoluble polymer, and undissolved solids other than the polymer which constitute 30 to 60 weight percent of the composition and are selected from pigments, fillers, extenders and combinations thereof. Fillers and extenders other than pigment constitute 10 to 70 weight percent of the total non-volatile solids. The novel compositions are stable, fluid or semi-fluid, high solids content mastics and caulks which have permanent low temperature flexibility and very low residual tack when cured, yet they have good wetting ability for a variety of architectural substrates, high tensile strength and impact, puncture and tear resistance and exceptionally high adhesion even to relatively non-adherent substrates such as foamed polyurethane roofing insulation and ethylene-propylene-diene interpolymers structural materials. These mastics and caulks are also water impermeable and possess superior wet adhesion to a variety of substrates, are shrink resistant and have sufficiently high chemical and physical stability to temperature variations, ultra-violet light, and oxidation to make them particularly useful as protective coatings and caulks in high exposure uses such as roofing and siding protectants and fillers. Both the mastics and caulks are compatible with opaque reflective pigments, and the pigmented compositions have superior reflective and heat radiation characteristics which make them particularly suitable for roofing mastics and caulks, especially for the production of foamed polyurethane roofing insulation.

Composite architectural structural materials are also provided which comprise relatively inflexible, architectural substrates coated on at least a portion of one surface with the described mastic compositions. Particularly useful composite articles comprise polyurethane roofing material, such as roofing insulation, coated on its upper surface with the described coating mastic containing an opaque reflective pigment.

DETAILED DESCRIPTION OF THE INVENTION

Improved coating mastic and caulking compositions having total non-volatile solids contents of 60 to 90 weight percent of which at least about 15 weight percent comprises a water-insoluble polymer binder and


undissolved solids other than the polymer are obtained by employing, as the binder, a polymer having a T_g (glass transition temperature) of -50°C . to -10°C . and which is permanently flexible and non-tacky when cured, and which contains pendant functional groups of the formula:



where R_1 is a divalent organic radical at least 3 atoms in length, and X is organoacyl or cyano. Relatively good flexibility is obtained throughout a wide temperature range by employing, as the polymer binder, a polymer having a T_g within the described range. Rapid loss of tack upon curing and low residual tack can be obtained by employing polymers of sufficiently high molecular weight to reduce or eliminate tackiness that would otherwise occur, particularly with the lower T_g polymers. The interrelationship of polymer composition, T_g , and molecular weight on residual tack are discussed in greater detail hereinafter.

The remainder of the polymer is selected from (1) conjugated diolefin polymers comprising at least about 50 weight percent of one or more conjugated diene monomers having 4 to 8 carbon atoms and 0 to 50 weight percent of one or more alkenyl-substituted monoaromatic monomers, (2) olefin-ester interpolymers comprising at least about 1 weight percent of a monoolefin monomer having up to about 4 carbon atoms and at least about 40 weight percent of an alkenyl or alkenol ester of a saturated carboxylic acid, (3) olefinically unsaturated carboxylic acid ester polymers comprising at least about 40 weight percent polymerized olefinically unsaturated carboxylic acid ester monomers, (4) alkenyl ether polymers containing at least about 30 weight percent alkenyl ether monomer units, and (5) combinations thereof. Functional groups containing different R_1 and X radicals can be contained in the same polymer molecule, and polymers containing different R_1 and X groups can be blended in the same composition.

The useful polymers contain functional groups containing either two carbonyl groups or a carbonyl and a cyano group separated by a single methylene group, as illustrated, and the methylene group is separated from the polymer main chain (backbone) by at least 4 atoms (R_1 plus the "interior" carbonyl group). Thus, R_1 is at least 3 atoms in length; i.e., the shortest link between the interior carbonyl group and the polymer backbone is at least 3 atoms long. Otherwise, the molecular weight, structure and elemental composition of R_1 does not negate the effectiveness of the dual keto or keto-cyano functionality of the pendant side chains. Thus, R_1 can be of any molecular weight sufficient to allow incorporation of the pendant functional groups into the polymer backbone, for instance, as part of a polymerizable olefinically unsaturated monomer or by substitution onto a preferred polymer by any suitable addition reaction, e.g.:




wherein n is an integer, and $-\text{O}-\text{R}_2$ is R_1 in expression (1), supra. R_1 can contain heteroatoms, such as oxygen, sulfur, phosphorus, and nitrogen; functional groups such as carbonyl, carboxy-ester, thio, and amino substituents, and aromatic, olefinic or alkynyl unsaturation. Typically, R_1 is a cyclic or acyclic divalent organic radical of 3 to 40 atoms in length; i.e., having 3 to 40 atoms in its shortest chain between the polymer backbone and the interior carbonyl group. For ease of manufacture from readily available reactants, R_1 is preferably of the formula:




wherein Y and Z are independently selected from O, S, and NR_7 , and R_3 is a divalent organic radical at least 1 atom in length, preferably 2 to about 40, and most preferably 2 to 20 atoms in length, Y and Z are preferably O, and R_7 is H or a monovalent organic radical, preferably H or hydrocarbyl radical having up to

6 carbon atoms.


X in expression (1) is -CO-R₄ or -CN, preferably -CO-R₄ where R₄ is hydrogen or a monovalent organic radical preferably having up to 10 atoms other than hydrogen (i.e., up to 10 atoms not counting hydrogen atoms which may be present in the radical). Most preferably, R₃ is selected from substituted and unsubstituted alkylene, polyoxyalkylene, polythioalkylene and polyaminoalkylene radicals, typically up to about 40 atoms in length, preferably up to about 20 atoms in length. The substituted and unsubstituted polythio-, polyoxy-, and polyaminoalkylenes can be readily formed by the well known condensation of alkylene oxides, alkylene amines, glycols, diamines, and dithiols. Thus:

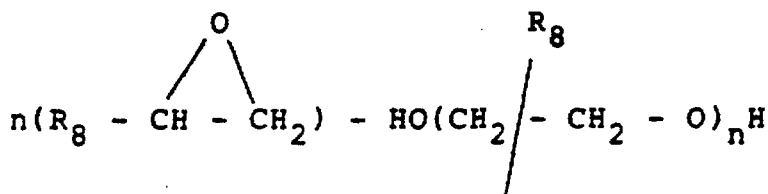

where R₈ is H or a monovalent organic radical, preferably H or alkyl radical. To illustrate, such pendant functional groups (formula 1) can be introduced into the polymer backbone by copolymerization of other monomers (discussed hereinafter) with a polymerizable monomer of the formula:

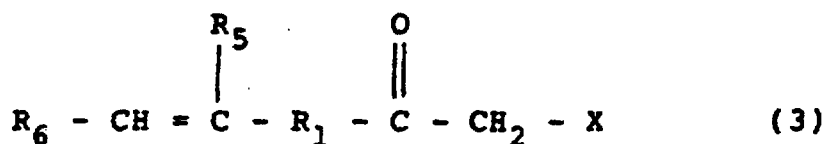

where X is as defined for formula 1, supra, R₅ and R₆ are independently selected from hydroxy, hydrogen, halo, thio, amino, and monovalent organic radicals, preferably having up to 10 atoms other than hydrogen, most preferably alkyl radicals having up to 10 carbon atoms. Substituting the preferred form of the group R₁ illustrated in formula 2 for R₁ in formula 1 yields the most preferred functional monomers:

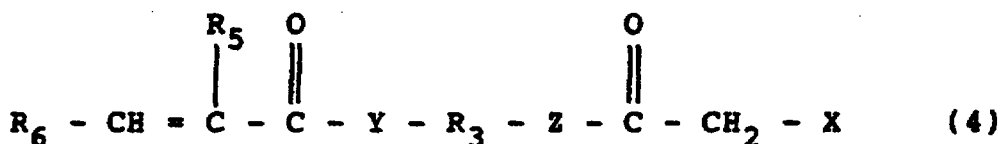

where R₃, R₅, R₆, X, Y and Z have the definitions given above. From this expression it can be seen that when R₆ is hydrogen, X is -CO-R₄, R₄ and R₅ are methyl, Y and Z are O, and R₃ is an ethylene radical, the resulting monomer is acetoacetoxyethyl methacrylate, one of the class of monomers described by Smith in U.S. Patent 3,544,987, the disclosure of which is incorporated herein by reference in its entirety.

This monomer can be prepared by first treating ethylene glycol with methacrylic acid to form hydroxyethyl methacrylate which then is treated with diketene, as described by Smith, to form acetoacetoxyethyl methacrylate. A particularly preferred class of functional monomers, due to their relative availability, are those disclosed by Smith, which correspond to formula (4) in which R₆ is hydrogen, Y and Z are oxygen, R₅ is hydrogen or an alkyl group having up to 12 carbon atoms, R₃ is an alkylene group containing up to 10 carbon atoms, X is -CO-R₄, and R₄ is an alkyl group having up to 8 carbon atoms.

The binder polymers contain a sufficient amount of one or more of the described functional monomers to increase the physical strength, particularly the adhesive and tensile strength, of the mastic or caulk relative to an otherwise identical composition in the absence of such functional monomers. Detectable strength enhancement is found in many polymers at functional monomer concentrations as low as 0.05 weight percent. Generally, however, the polymers will contain at least 0.1 and typically at least about 0.25 weight percent of the functional monomer based on total polymer weight. Much higher functional monomer concentrations can be employed. Thus, functional monomer concentrations will usually be between 0.1 to 40 weight percent or more, typically 0.1 to 10 weight percent. Surprisingly, significant increases in adhesive

strength can be achieved at functional monomer concentrations below 5 weight percent and even below 2 weight percent. Hence, preferred functional monomer concentrations in many of the useful compositions are within the range of 0.1 to 5 weight percent, often within the range of 0.1 to 2 weight percent.

Presently preferred polymers which contain the above described functional monomers include (1) copolymers of substituted or unsubstituted alkenyl aromatic monomers and conjugated diolefins, (2) olefin-ester interpolymers of C_{2-4} monoolefins and C_{2-8} alkenyl or alkenol esters of C_{1-12} saturated carboxylic acids, (3) polymerized alkyl and alkanol esters of olefinically unsaturated carboxylic acids, (4) alkenyl ether homopolymers and interpolymers of C_{2-10} olefin ethers of C_{1-10} alcohols, and (5) combinations thereof. In addition to the above described functional monomers, each of these preferred classes of polymers can contain additional monomers such as olefinically unsaturated mono- and polycarboxylic acids, amides, aldehydes, etc.

Illustrative polymers of esters of olefinically unsaturated carboxylic acids are described in our copending Application No. 87 303 689.1 filed 27 April 1987 and in US-A-4 540 739. These polymers comprise, primarily, one or more polymerized, olefinically unsaturated mono- and/or polycarboxylic acid esters and optionally may contain other polymerized monomers. Thus, the ester polymers usually contain at least about 40 weight percent, often at least about 60 weight percent, and preferably at least about 80 weight percent polymerized, olefinically unsaturated carboxylic acid ester monomers other than the above described functional monomers. Presently preferred ester monomers are esters of olefinically unsaturated mono- and polycarboxylic acids having 4-17 carbon atoms, and hydroxy-, amino-, or thio- substituted or unsubstituted alcohols, amines, and thiols having from 1 to 30 carbon atoms, preferably 1 to 20 carbon atoms, per molecule. Illustrative unsaturated carboxylic acids are acrylic, methacrylic, fumaric, maleic, itaconic, etc. Illustrative hydroxy, amino, and thio-substituted alcohols, amines, and thiols are glycerol, 1-hydroxy-5-thiododecane, 2-amino-5-hydroxyhexane, etc. Presently preferred esters, due primarily to cost and availability, are hydroxy-substituted and unsubstituted alcohol esters of acrylic and methacrylic acids such as butyl acrylate, 2-ethylhexyl acrylate, methyl methacrylate, hydroxyethyl acrylate, etc.

A variety of olefinically unsaturated carboxylic acid ester monomers, as well as a variety of other polymerizable olefinically unsaturated monomers useful for the manufacture of polymers having the desired relatively low T_g s, and the interrelationship of these monomers to polymer T_g are discussed in the Handbook of Pressure Sensitive Adhesive Technology, Van Nostrand-Reinhold Company, New York, 1982 particularly at pages 298 through 329, including the references cited therein, the disclosures of which are incorporated herein by reference in their entireties.

The desired glass transition temperatures can be achieved with carboxylic acid ester homopolymers but is usually obtained by polymerizing "hard" ester monomers with suitable proportions of "soft" ester monomers to form a polymer having the T_g best suited to the particular application. So called "hard" monomers are those which produce homopolymers having relatively high T_g s while "soft" monomers are those which form homopolymers having relatively low T_g s. For instance, acrylate monomers are typically "softer" than the corresponding methacrylic acid esters. Thus, polyethyl acrylate has a T_g of -22°C . while polyethyl methacrylate has a T_g of 65°C . The T_g of poly-n-butyl acrylate is -54°C . as compared to a T_g of 20°C . for poly-n-butyl methacrylate. n-Butyl acrylate, 2-ethylhexyl acrylate and n-octyl acrylate are commonly employed as "soft" monomers while various methacrylates, including methyl, isopropyl, n-butyl, and t-butyl methacrylate, are typical "hard" monomers.

The T_g of any homopolymer can be readily determined, and the T_g of an interpolymers of two or more such monomers can be predicted, roughly, from the respective T_g s of each of the monomers involved. The most exact method of determining the glass transition temperature of the selected interpolymers of any combination of monomers is, of course, measurement of the T_g of that interpolymers per se. The homo- and interpolymers useful in the compositions of this invention typically have T_g s of -50°C . to -10°C ., preferably -50°C . to -20°C .

The described functional monomers and olefinically unsaturated carboxylic acid ester monomers can constitute the total composition of this polymer class, or the portion of the polymer molecule not accounted for by those two monomer classes can be any polymerizable, olefinically unsaturated monomer or combination of such monomers. Illustrative of other polymerizable monomers are vinyl esters of carboxylic acids, the acid moiety of which contains from 1 to 20 carbon atoms (e.g. vinyl acetate, vinyl propionate, vinyl isononanoate); aromatic or aliphatic, alpha-beta-unsaturated hydrocarbons such as ethylene, propylene, styrene, and vinyl toluene; vinyl halides such as vinyl chloride and vinylidene chloride; olefinically unsaturated nitriles such as acrylonitrile; and olefinically unsaturated carboxylic acids having up to 10 carbon atoms such as acrylic, methacrylic, crotonic, itaconic, and fumaric acids, and the like.

The conjugated diolefin polymers typically contain 0.5 to 50 weight percent of one or more vinyl aromatic monomers and 50 to 99 weight percent of one or more conjugated diolefins having 4 to 8 carbon

atoms. These copolymers may be either random or block interpolymers. Illustrative alkenyl aromatic monomers include styrene, alpha-methylstyrene, p-methylstyrene, chlorostyrene, methyl-bromostyrene, etc. Illustrative conjugated diolefin monomers include butadiene, isoprene, etc. The alkenyl aromatic monomer is preferably present at a concentration of 5 to 70 weight percent, most preferably 20 to 50 weight percent, while the conjugated diolefin monomer is typically present at a concentration of 30 to 95 weight percent, most preferably 50 to 80 weight percent.

As in the case of the olefinically unsaturated carboxylic acid ester polymers discussed above, the conjugated diolefin polymers can contain various other monomers in addition to the above described functional monomers, such as the vinyl esters of carboxylic acids, mono-olefins, olefinically unsaturated nitriles, olefinically unsaturated carboxylic acids, etc., discussed above with regard to the olefinically unsaturated carboxylic acid ester interpolymers. Furthermore, the conjugated diolefin polymers can contain up to about 40 weight percent, typically up to about 20 weight percent, of olefinically unsaturated carboxylic acid ester monomer units such as those described above for use in production of the useful carboxylic acid ester interpolymers.

The olefin-ester polymers typically contain 1 to 40 weight percent of a C_{2-4} monoolefin monomer, from 60 to 98.5 weight percent of a C_{2-8} alkenyl or alkenol ester of a C_{1-12} saturated carboxylic acid and 0.5 to 10 weight percent of a functional monomer as described above. Preferably, the monoolefin monomer is present in an amount from 1 to 25 weight percent, most preferably from 10 to 15 weight percent. Illustrative mono-olefins are ethylene, propylene and butylene, with ethylene being preferred.

The ester component of the olefin-ester polymers is preferably a C_{2-8} alkenyl or alkenol ester of a C_{1-12} saturated carboxylic acid. Illustrative C_{2-8} unsaturated alcohols and diols which can be reacted with C_{1-12} saturated carboxylic acids to form reactive esters are C_{2-8} alkenols such as propenol, butenol, pentenol, hexenol, heptenol and octenol and their diol homologues. Suitable saturated acids include formic, acetic, propionic, butanoic, valeric, caproic, heptanoic and octanoic acids.

The most common of the foregoing esters are vinyl acetate, vinyl propionate, and vinyl butanoate.

The alkenyl ether polymers typically contain at least about 30 weight percent, preferably at least about 50 weight percent, polymerized alkenyl ether monomer units in which the alkenyl group has at least 2 carbon atoms, typically 2 to 10 carbon atoms, and the alcohol (hydrocarbyl-oxy) group has from 1 to 10 carbon atoms. Illustrative are methylvinyl ether, n-octyl-1-propenyl ether, 2,4-dimethylbutyl-2-hexenyl ether, vinylphenyl ether, etc.

The polymers encompassed by the four general classes described above can contain minor amounts, e.g. up to 30 weight percent, of one or more additional monomers, and they can be grafted or reacted with other chemical agents to modify their chemical composition. Thus, the polymers of groups (1) and (3) may contain minor amounts of substituted and unsubstituted monoolefin monomers such as ethylene, isobutylene, chlorobutenes, acrylonitrile, vinyl ethers, alkenyl esters of saturated carboxylic acids, etc. The conjugated diolefin polymers (group 1) may also contain olefinically unsaturated carboxylic acid ester monomers, and the olefinically unsaturated acid ester polymers (group 3) may contain conjugated diolefin and/or alkenyl monoaromatic monomers. Similarly, the alkenyl ester polymers of group (2) and the alkenyl ether polymers of group (4) can contain substituted and/or unsubstituted conjugated diolefins, alkenyl aromatics, olefinically unsaturated carboxylic acid esters, etc.

It has been found that minor amounts of olefinically unsaturated mono- and polybasic carboxylic acids and/or sulfoalkyl esters of such carboxylic acids significantly improve cohesive and adhesive strength of the mastics and caulks. Thus, it is presently preferred that the polymers contain at least 0.1 weight percent, usually 0.1 to 10 weight percent, and preferably 0.1 to 5 weight percent of a polymerizable, olefinically unsaturated carboxylic acid having up to about 10 carbon atoms and/or a sulfoalkyl esters of such acids, e.g. sulfoethyl methacrylate, sulfoethyl itaconate, sulfomethyl malonate, etc.

Although the polymers can contain other "functional" monomers such as N-methylol amides, e.g., N-methylol acrylamide, it has been found that such other functional monomers are not essential to achieving acceptable physical properties and that the detriment associated with the presence of such monomers, such as formaldehyde release upon curing, loss of adhesive strength, etc., can be avoided by minimizing the concentration of such N-methylol amides or eliminating them altogether. Thus, the preferred polymers contain less than about 1 percent, preferably less than about 0.5 percent, and more preferably no amount of N-methylol amide monomer units.

It also has been found that suitable physical properties can be achieved without crosslinking or hardening agents such as aldehyde hardeners (e.g., formaldehyde, mucochloric acid, etc.), cross-linking catalysts such as the strong base catalyst discussed by Bartman in U.S. Patent 4,408,018, acid catalysts such as phosphoric or methane sulfonic acid, complexing agents such as metals and metal compounds and complexes, or reactive monomers (e.g., glycols, polyamides, etc.). Since such hardening agents increase

the complexity and expense of polymer manufacture, they are not required to obtain the desired physical properties with the polymers of this invention, and, in many instances, the incorporation of such "hardening" agents impairs other desirable properties such as adhesive strength, the preferred polymers are substantially free of such hardening agents or their residues. Nevertheless, minor amounts of such materials can be present.

Polymer molecular weight can have a significant effect on the balance of physical properties in polymers of a given monomer composition, i.e. polymers of identical monomer content. Thus, as discussed in the Handbook of Pressure Sensitive Adhesive Technology, for instance at pages 307-311, shear resistance is roughly proportional to molecular weight up to relatively high molecular weights at which shear resistance drops off dramatically in some polymers. Residual tack is typically high at very low molecular weights and decreases gradually as molecular weight is increased after a molecular weight value yielding maximum tack is exceeded. Adhesive strength (peel) typically exhibits discontinuous behavior, increasing with molecular weight up to moderate molecular weight levels and then gradually decreasing as molecular weight is increased further.

As opposed to polymers preferred for the manufacture of pressure sensitive adhesives which have high residual tack, the polymers useful in this invention have very low residual tack and lose tack rapidly as they cure. Thus, the molecular weight of the useful polymer is sufficiently high to provide rapid loss of tack upon curing and very low residual tack in the described mastic and caulking compositions. Slow loss of tack upon curing and significant residual tack are undesirable in most if not all mastic and caulking applications since tackiness promotes adhesion of dust and other materials and renders the mastic or caulk more difficult to apply and work around after application. The accumulation of dust and other materials which might darken the surface of the mastic or caulk is particularly undesirable in the case of reflective coatings such as exterior coatings. This is particularly true in the case of reflective roof coatings which preferably reflect and radiate sufficient heat to reduce maximum roof temperature on sunny days.

Rapid tack loss upon curing and the preferred low residual tack values can usually be achieved by employing polymers having number average molecular weights of at least about 50,000, typically at least about 75,000, and preferably at least about 100,000 as determined by gel permeation chromatography. Higher molecular weight polymers can be employed and, in most cases, there is no essential upper limit on polymer molecular weight. The few exceptions, as described in the Handbook of Pressure Sensitive Adhesive Technology, are those polymers in which shear resistance (cohesive strength) can drop off dramatically at very high molecular weights. Polymer cohesive strength is largely responsible for tensile strength of the mastic and caulking compositions of this invention and is preferably sufficiently high to maintain the desired physical integrity of the mastic or caulk. Thus, polymer molecular weight preferably does not exceed the level at which significant reduction in shear value is observed in those susceptible polymers, particularly when the mastic or caulk is intended for applications requiring any significant degree of tensile strength.

As a rule, polymer shear strength--the ability of the polymer to prevent cohesive failure -- is not the limiting physical strength factor in mastics and caulks due to the high molecular weight of the polymers employed, and thus their high intrinsic shear strength. Thus, it is not usually necessary to control polymer properties to insure adequate cohesive strength of the compounded mastic or caulk except in compositions having very low polymer concentrations, e.g., below about 15 weight percent of total solids. Nevertheless, a great advantage of the compositions of this invention is that the useful polymers containing the described functional monomers have shear values significantly higher than the shear values of polymers of otherwise identical monomer composition and molecular weight in the absence of the described functional monomers. As a result, higher non-polymer solids loadings can be employed in the mastics and caulks of this invention without cohesive failure than is the case with otherwise identical mastics and caulks containing polymers of identical monomer compositions and molecular weight in the absence of the described functional monomers. Thus, mastics and caulks containing the described polymers possess a superior balance of physical properties, particularly an improved balance of shear strength and adhesion (adhesiveness to substrates), which provides superior performance characteristics and enables higher loadings of non-polymeric solids than is possible with polymers not containing the described functional monomers.

While all of the polymers described above can be employed for the manufacture of mastics and caulks, polymers which contain little or no diene monomer or other oxidation and UV susceptible monomer units are presently preferred, particularly for exterior applications. This is particularly true in the case of roof coating mastics. Thus, the above described olefin-ester polymers, olefinically unsaturated carboxylic acid ester polymers and alkenyl ether polymers which are free of significant residual olefinically unsaturation in the polymer backbone are presently preferred external mastics and caulks, and the olefinically unsaturated carboxylic acid ester polymers are presently most preferred for such applications.

The useful polymers can be prepared by free radical solution and emulsion polymerization methods known in the art including batch, continuous and semicontinuous procedures. For the purposes of this disclosure, free radical polymerization methods are intended to include radiation polymerization techniques. Illustrative free-radical polymerization procedures suitable for preparing aqueous polymer emulsions involve gradually adding the monomer or monomers to be polymerized simultaneously to an aqueous reaction medium at rates proportionate to the respective percentage of each monomer in the finished polymer and initiating and continuing polymerization with a suitable free radical polymerization catalyst. Optionally, copolymers can be obtained by adding one or more comonomers disproportionately throughout the polymerization so that the portion of the polymers formed during the initial polymerization stage comprise a monomer composition differing from that formed during intermediate or later stages of the same polymerization. For instance, a styrene-butadiene copolymer can be formed by adding a greater proportion or all of the styrene during the initial polymerization stages with the greater proportion of the butadiene being added later in the polymerization.

Illustrative free-radical catalysts are free radical initiators such as hydrogen peroxide, potassium or ammonium peroxydisulfate, dibenzoyl peroxide, lauroyl peroxide, ditertiarybutyl peroxide, 2,2-azobisisobutyronitrile, etc., either alone or together with one or more reducing components such as sodium bisulfite, sodium metabisulfite, glucose, ascorbic acid, erythorbic acid, etc. Ultraviolet (UV) and electron beam polymerization methods suitable for initiating free radical polymerization are discussed in the Handbook of Pressure Sensitive Adhesive Technology, particularly at pages 586-604 and the reference cited therein. The reaction is continued with agitation at a temperature sufficient to maintain an adequate reaction rate until most or all monomers are consumed. Monomer addition is usually continued until the latex reaches a polymer concentration of about 20 to about 70 weight percent.

Significant loss of adhesive strength, elongation and flexibility can result from the use of excess catalyst, particularly in the later or final stages of polymerization. This apparently is due to the presence of the described functional monomer, since such losses generally do not result in the absence of such monomers. Thus, the total catalyst concentration is generally below about 5, preferably below about 2, and most preferably below about 1 weight parts per weight of functional monomer.

Physical stability of the dispersion usually is achieved by providing in the aqueous reaction medium one or more nonionic, anionic, and/or amphoteric surfactants including copolymerizable surfactants such as sulfonated alkylphenol polyalkyleneoxy maleate and copolymerizable stabilizers such as sulfoethyl methacrylate, alkenyl sulfonates, etc. Illustrative of nonionic surfactants are alkylpolyglycol ethers such as ethoxylation products of lauryl, oleyl, and stearyl alcohols or mixtures of such alcohols such as coconut fatty alcohols; alkylphenol polyglycol ethers such as ethoxylation products of octyl- or nonylphenol, diisopropylphenol, triisopropylphenol, di- or tritertiarybutyl phenol; etc. Illustrative of anionic surfactants are alkali metal or ammonium salts of alkyl, aryl, or alkaryl sulfonates, sulfates, phosphates, phosphonates, etc. Examples include sodium lauryl sulfate, sodium octylphenol glycoether sulfate, sodium dodecylbenzene sulfonate, sodium lauryl diglycol sulfate, and ammonium tritertiarybutylphenol penta- and octa-glycol sulfates. Numerous other examples of suitable ionic, nonionic and amphoteric surfactants are disclosed in U.S. Patents 2,600,831, 2,271,622, 2,271,623, 2,275,727, 2,787,604, 2,218,920, and 2,739,891, the disclosures of which are incorporated herein by reference in their entireties.

Protective colloids may be added to the aqueous polymer dispersions either during or after the reaction period. Illustrative protective colloids include gum arabic, starch, alginates, and modified natural substances such as methyl-, ethyl-, hydroxyalkyl- and carboxymethylcellulose, and synthetic substances such as polyvinyl alcohol, polyvinyl pyrrolidone, and mixtures of two or more of such substances. Fillers and/or extenders such as dispersible clays, and colorants, such as pigments and dyes, can also be added to the aqueous dispersions either during or after polymerization. Those skilled in the art of emulsion polymers will appreciate that protective colloids, tackifiers, and other additives should be compatible with the polymer emulsion to assure formation of a stable dispersion.

The emulsions typically contain 20 to 70 percent polymer as manufactured, while preferred latexes typically having polymer solids contents of 40 to 60 weight percent. The dispersed polymer particles can be of any size suitable for the intended use, although particle sizes of at least about 100 nanometers are presently preferred. Most often, the described latexes will have particle sizes within the range of 100 to 1000 nanometers as determined on the model N-4 or the "Nanosizer" available from Coulter Electronics, Inc., of Hialeah, Florida.

Solutions of the useful polymers can be prepared by polymerizing the selected monomers as described above in solvents in which both the monomers and the polymers are soluble. Suitable solvents include aromatic solvents such as xylene and toluene, alkanes such as hexane, and alcohols such as butanol. Polymerization initiators and reducing components, when employed, should be soluble in the selected

solvent or mixture of solvents. Illustrative free radical initiators soluble in the noted organic solvents include dibenzoyl peroxide, lauroyl peroxide, and 2,2-azobisisobutyronitrile. Erythorbic and ascorbic acids are illustrative of reducing components soluble in polar organic solvents. The water-based emulsions are presently preferred due to the expense and environmental and toxicity problems associated with solvents.

The coating mastic and caulking compositions generally contain 60 to 90 weight percent total solids of which 15 to 75 weight percent is one or more of the above described polymers and 25 to 85 weight percent is undissolved solids other than the polymer. The caulking compounds usually have total solids contents toward the upper end of the described range, while the coating mastics generally have somewhat lower solids concentrations. The remainder of the composition can be either water or polar solvent other than water, or a combination of both. Typical polar solvents are those described above as being useful in the manufacture of polymer solutions. Thus, the compounded compositions will generally contain at least about 10, typically 10 to 40 and preferably 10 to 30 weight percent liquid, the remainder being polymer and other solids. Polymer concentration usually corresponds to 15 to 75, generally 40 to 70 and most often 50 to 70 weight percent of total solids content. While mastics having total solids concentrations as low as 60 weight percent and sometimes even lower find utility in architectural applications, higher total solids loadings are generally preferred, and the compositions of this inventions can be readily manufactured to obtain stable fluid or paste like mastics and caulks having total solids contents of 70 to 90 weight percent and otherwise acceptable physical properties. The remaining solids concentration other than that accounted for by the above described polymers is largely or totally accounted for by pigments and/or fillers employed to color the compositions, render them reflective (as in the case of roof coatings), or to extend the volume and weight of the mastic or caulk relative to polymer content and thereby reduce overall expense. Such non-polymeric solids usually account for 25 to 85 weight percent, typically 30 to 60 weight percent, and most often 40 to 50 weight percent of the total solids content.

Pigments are often employed as colorants, although highly reflective opaque pigments such as titanium dioxide, zinc oxide, and the like are most often employed to produce mastics and caulks which are opaque, especially to ultra-violet light, and which reflect incident radiation thereby reducing exterior surface temperatures. When employed, these pigments are typically used at concentrations of 5 to 75 weight percent, generally 10 to 60 weight percent, and most often 10 to 50 weight percent of total solids. Fillers and extenders other than pigments sometimes used to strengthen and/or extend the volume or mass of the mastic or caulk include natural or synthetic fibers and fillers and are typically employed at concentrations of 5 to 80 weight percent, generally within the range of 10 to 70 weight percent of total solids. Illustrative fibrous materials include fiber-glass and fibers of other natural and synthetic polymeric materials. Preferred polymeric fibers are those which are insensitive to light and which have relatively low T_g s and which therefore do not inhibit flexibility, particularly at low temperatures. Illustrative of such polymers are polyethylene, polypropylene, etc. When employed, such fibers are usually present at concentrations of up to about 20 weight percent, most often 5 to 15 weight percent of total solids. Other fillers and extenders typically include finely divided inorganic materials which are dispersible in and are compatible with the remainder of the mastic or caulking composition. Illustrative materials include clays, calcium carbonate, silica, mica, aluminum-magnesium silicates, magnesium silicates (e.g., talc), etc.

Other additives which may be employed include anionic dispersants, thickeners and other conventional coatings ingredients such as preservatives, anti-microbial agents, mildewicides, anti-freeze agents, coalescents, defoaming agents, dyes, plactizers, and adhesion promoters. Illustrative coating thickeners are cellulosic thickeners such as methylcellulose and hydroxyethyl cellulose, associative hydrophobic alkali-soluble emulsions, etc. The anionic dispersants can be employed to facilitate dispersion of inorganic materials including the above described pigments and fillers. Illustrative of such dispersants are sodium tripolyphosphate, potassium tripolyphosphate, polyacrylate dispersants, sulfonated polymers including naphthalene-formaldehyde sulfonated poly-condensates, polymaleates, natural product-derived dispersants such as tannins, lignins, alginates, gluconates, glucosides, organic phosphonates including methylene phosphonates, etc.

The coating mastics and caulks can be prepared by mixing the polymer solution or dispersion with the selected solids ingredients, e.g., pigment, filler etc., and other additives in high speed dispersion equipment such as a Cowles Disperser. The above described dispersing aids facilitate rapid dispersion and stabilization of the resulting dispersion.

The described mastics and caulks are useful for coating and filling, and exhibit high adhesion to a wide variety of architectural construction materials such as wood, concrete, metal, glass, synthetic materials such as plastics and elastomers, plaster, stucco, brick, wall-board, etc. They are particularly useful for protecting exposed architectural materials such as roofing and siding, and especially roofing materials such as asphalt, impregnated felt, hot-applied asphalt and pitch, single-ply bitumen roll, polyurethane roof coatings, particu-

larly foamed polyurethane roof insulation, and other synthetic roofing and exterior siding materials such as ethylene-propylene-diene interpolymers. The mastics and caulks are particularly useful for coating and sealing physically fragile architectural materials which are susceptible to weather and which have relatively low adhesion surfaces i.e., surfaces that are difficult to bond to, such as polyurethane, especially high density, closed pore, polyurethane foam insulation, and ethylene-propylene-diene interpolymers substrates. Illustrative foamed polyurethanes include the so-called "popcorn," "orange peel," and smooth finish foams well known in the art. The ethylene-propylene-diene interpolymers substrates are typically interpolymers or ethylene-propylene and one or more dienes such as butadiene, isoprene, dicyclopentadiene, etc. For instance, the cured mastic compositions formulated with polymers containing the described functional monomers exhibit adhesive strengths to high density, closed pore, foamed polyurethane roof insulation several times greater than otherwise identical mastic compositions formulated with otherwise identical polymers not containing the described functional monomers. In fact, the cured adhesive bond strength of the useful mastics to polyurethane foam roof insulation is so much higher than that of comparable mastics not containing the described functional monomers that cohesive failure of the useful mastic occurs before failure of the adhesive bond to the substrate. The opposite is true of comparable mastics not containing the described functional monomers. Useful mastics can be readily formulated by procedures described above which have cured adhesive bond strengths to foamed polyurethane roof insulation of at least about 17.86 kg/m (1 pound per inch), typically at least about 35.72 kg/m (2 pounds per inch), and even about 53.58 kg/m (3 pounds per inch) or more when evaluated by the adhesion test procedures described in the following illustrative examples. The cured mastics are also resistant to weathering and environmental exposure, and they are particularly resistant to adhesive bond failure under wet conditions. Thus, mastics can be readily formulated by the above described procedures which have cured adhesive bond strengths to polyurethane foam under wet-test conditions of at least about 8.93 kg/m (0.5 pounds per inch), often at least about 17.86 kg/m (1 pound per inch), and even about 35.72 kg/m (2 pounds per inch) or more when evaluated by the wet adhesion test procedures described in the following examples. The described caulks also exhibit superior wet and dry adhesion to substrates, particularly to substrates which are difficult to bond such as polyurethane, synthetic plastics and elastomers, ceramics such as ceramic tile, wall-board, plaster, etc. They are more impermeable and resistant (non-absorbant) to water when compared to comparable caulks which do not contain the described functional monomers.

The mastics can be readily applied to the selected substrate by a variety of application techniques well known in the art. The method of application typically depends, to some extent, on the viscosity and rheology of the applied composition. The roof mastics typically have viscosities somewhat greater than those of exterior latex paints, and they are usually applied by high pressure spray apparatus such as airless spray equipment. However, a variety of other techniques can also be employed such as brushing, rolling, electrostatic spray, etc. The useful caulks are typically applied by any one of a variety of well known caulking guns, trowls or other equipment.

The invention is further described by the following examples which are illustrative of specific modes of practicing the invention and are not intended as limiting the scope of the invention as defined by the appended claims.

EXAMPLE 1

This example illustrates preparation of a functional monomer-containing polymer in accordance with this invention. A monomer pre-emulsion is formed by emulsifying 21.5 weight parts water, 0.77 parts acrylamide, 3.55 parts octylphenol-poly (ethyleneoxy) ethanol sulfate sodium salt (35 weight percent concentration), 84.86 parts butyl acrylate, 7.00 weight parts styrene, 4.83 parts acetoacetoxyethylmethacrylate (AAEMA), and 2.54 parts acrylic acid. A stirred reactor is purged with a nitrogen atmosphere, and 55.0 weight parts water and 1.9 parts octylphenoxy-poly (ethyleneoxy) ethanol (25 weight percent) are added and heated to 92° C. 10.8 Weight parts of the monomer pre-emulsion is then charged to the heated reactor and 0.0083 weight parts of a preformed catalyst solution containing 3 weight percent potassium persulfate in distilled water is added. The resulting mixture is maintained at 92° C. with agitation for 15 minutes after which the pre-emulsion and catalyst solutions are continuously fed to the reactor for 3 hours and 3.5 hours, respectively, at rates sufficient to consume both feeds completely. 14.3 Weight parts of the 3 weight percent potassium persulfate catalyst solution are employed throughout the entire run. After monomer and catalyst feeds are terminated, the product is cooled and the pH of the resulting emulsion is adjusted to 8.5 with ammonia.

EXAMPLE 2

The operation described in Example 1 is repeated with the exception that the polymer is prepared without the acetoacetoxyethylmethacrylate monomer. The polymer pre-emulsion contains 0.81 weight parts acrylamide, 89.1 weight parts butylacrylate, 7.36 weight parts styrene and 2.67 weight parts acrylic acid. Catalyst composition and reaction conditions are otherwise as defined in Example 1.

EXAMPLE 3

The operation described in Example 1 is again repeated with the exception that Sipomer WAM®, a wet adhesion monomer available from Alcolac Inc., Baltimore, Maryland, is substituted for the acetoacetoxyethylmethacrylate monomer. Thus, the monomer pre-emulsion contains 0.77 weight parts acrylamide, 84.86 weight parts butylacrylate, 7.00 parts styrene, 4.83 parts Sipomer WAM and 2.54 parts acrylic acid. Catalyst composition, concentrations and other reaction conditions are as defined in Example 1.

EXAMPLE 4

Elastomeric coating mastic compositions are prepared from the polymer emulsions described in Examples 1, 2 and 3 by intimately blending in a high shear blender the following ingredients added sequentially to the blender in the order indicated. Blending is continued after each addition until complete dispersion of the last added ingredient is achieved. The ingredients are added as follows: 82.7 weight parts latex emulsion, 0.9 parts Nalco 2300® defoamer available from Nalco Chemical Company, Oakbrook, Illinois, 0.6 parts polyethylene glycol (molecular weight 1200), 1.2 parts naphthol spirits, 7 parts water, 1.8 parts Tamol 850® dispersant, a sodium salt of a carboxylated polyelectrolyte available from Rohm and Haas, Inc., 0.4 parts potassium tribasic pyrophosphate, 7.8 parts ethylene glycol, 21.1 parts Tronox CR-800® titanium dioxide pigment available from Kerr-McGee Chemical Co., Inc., 9.8 parts Kadox 515® zinc oxide pigment available from New Jersey Zinc, Inc., 7.0 parts mica (water ground 325 mesh), 112.4 parts Duramite® calcium carbonate available from Thompason-Weinman and Co., Inc., 2.2 part Texanol® (2,2,4-trimethyl-1,3-pentenediol monoisobutyrate plastizer and coalescing aid) available from Eastman Kodak, Inc., 0.9 parts Nalco 2303® silicone containing vegetable oil defoamer available from Nalco Chemical Company, and 82.3 parts latex emulsion. This procedure is used to prepare separate elastomeric roof coatings from each of the latexes defined in Examples 1, 2 and 3 using identical proportions of each latex and other ingredients as defined in this example.

EXAMPLE 5

The 180° peel adhesion of the 3 mastic compositions formulated in Example 4 are evaluated under wet and dry conditions by the following procedures. The mastic composition is drawn down by a glass rod on a sample of high density, closed pore, polyurethane foam roofing insulation available from Standard Insulation Co., Charlotte, North Carolina having a density of 45 to 48 kg/m³ (2.8 to 3.0 pounds per cubic foot) and an "orange peel" finish. Two 25 x 250 mm (1-inch by 10-inch) strips of desized, broadcloth fabric 145 g/m² (4.28 oz. per yard) AD/80 thread count are then laid lengthwise over the mastic treated portion of the polyurethane substrate. When the compound has set to the point that no distortion of the test structure will occur, a thin 0.79 mm (1/32 inch) or less coating of the mastic is applied over the cloth strips to protect against moisture and minimize adhesive failure between the cloth and the mastic test specimen. The test specimens are allowed to air-cure for seven days at 24° C (75° F.) and 50% relative humidity and are then divided into two lots. One lot is tested for dry adhesion and the other lot is completely immersed in water at 24° C (75° F.) for seven days. Immediately following after the seven day immersion, the wet-test specimens are removed and tested for wet adhesion values.

The cured samples are prepared for testing by cutting the cured cloth-mastic composite through to the substrate surface with a razor blade along the edges of the cloth strips. The test specimen is then placed in an Instron Tensile Tester, and the cloth is pulled back on itself at an angle of 180° to peel the compound from the test substrate. The rate of separation of the Instron jaws is maintained at 50 mm (2 inches) per minute throughout the test. If the cloth strip begins to peel away from the compound during the test, the strip is cut crosswise with a sharp razor blade at the point of separation to obtain separation at the interface between the test compound and the substrate surface. A minimum of five strips is tested for each condition i.e., dry and wet adhesion. Average peel strength (P) in pounds per inch is obtained during each test using the Instron integrator attachment and calculating as follows:

$$P = XS/X_0$$

where X is the cumulative integrator reading over the test. X_0 is the integrator reading when full scale load is applied, and S is full scale load in pounds. The results of these evaluations are reported in the following table.

TABLE 1

Polymer of Example No.	Monomer, wt. %	Adhesive (Lbs./In.)	Strength, kg/m
		Dry	Wet
1	AAEMA, 4.83	(3.2 ^a)57.1	(2.0 ^a)35.7
2	None	(0.25 ^b)4.5	(0.01 ^b)0.18
3	Sipomer WAM®, 4.83	(0.40 ^b)7.1	(0.03 ^b)0.54

a = cohesive failure of mastic.

b = adhesive failure at substrate surface.

EXAMPLE 6

A water-base polymer emulsion is prepared as described in Examples 1 through 3 with the following differences in reactor charge, pre-emulsion composition and catalyst feed. The reactor is initially charged with 55.18 parts water per hundred weight parts monomer and 1.91 parts per 100 parts monomer (PHM) octyl phenoxy poly (ethyleneoxy) ethanol surfactant. The monomer pre-emulsion is formed by emulsifying, as described in Example 1, 21.51 PHM water, 0.94 PHM acrylamide, 3.55 PHM octylphenoxy poly (ethyleneoxy) ethanol sulfate, sodium salt, 91.24 PHM butyl acrylate, 1.88 PHM acrylonitrile, 0.94 parts acrylic acid, 4.72 parts acetoacetoxyethylmethacrylate and 0.28 PHM methyl methacrylate. Total catalyst feed during entire operation is 0.43 grams potassium persulfate dispersed in 13.86 PHM deionized water. The reactor is initially charged with the described reactor charge, purged with nitrogen, and gradually heated to 92° C. When the reactor contents reach 78° C., 2.0 PHM of the pre-emulsion is added, and, when reactor temperature reaches 85° C., 10.0 PHM of the catalyst solution is added. When reactor temperature reaches 92° C. the remainder of the pre-emulsion and catalyst feeds are added at constant rates over 3 and 3.5 hour periods, respectively. After catalyst feed is exhausted, the reactor contents are held at temperature for 2 hours.

EXAMPLE 7

The operation described in Example 6 is repeated with the exception that the acetoacetoxyethylmethacrylate monomer is eliminated from the monomer pre-emulsion feed, and the respective amounts of the remaining pre-emulsion ingredients are increased proportionately to obtain a total amount of pre-emulsion equal to that employed in Example 6. Reactor charge, pre-emulsion and catalyst feed compositions and operating conditions are otherwise as described in Example 6.

EXAMPLE 8

Coating mastic compositions are prepared employing the polymer emulsions described in Examples 6 and 7 using the procedures and compositions described in Example 4. The resulting mastic compositions are evaluated for peel adhesion as described in Example 5 and for tensile strength and elongation by the following procedures.

Tensile strength and elongation are determined by applying the mastic to a Teflon-Coated plate and allowing it to cure for 14 days for tensile strength evaluations and 28 days for elongation values. The mastic samples are inverted after 7 days to promoted thorough curing. When curing is complete, the specimens are cut with a dumbbell-shaped dye measuring 75 mm (3 inches) long by 19 mm (3/4 inch) wide having a neck width of 6 mm (1/4 inch). Tensile strength is then determined using an Instron Tensile Tester by clamping opposite ends of the dumbbell-shaped mastic sample in the opposing jaws of the tester at an

initial jaw separation of 12 mm (0.5 inch) and a jaw separation speed of 5 mm (0.2 inches) per minute. The force applied to the sample by the tester at the point of sample failure is divided by initial sample cross section at the narrowest portion of the dumbbell-shaped specimen to obtain tensile strength in pounds per square inch. Elongation is determined by dividing exposed sample length (Instron jaw separation) at the point of failure by initial sample length (initial jaw separation) and multiplying by 100 to obtain elongation expressed in percent.

Tensile strength and elongation values for the described mastic samples are reported in Table 2.


TABLE 2

Polymer of Example No.	Monomer, Wt. %	Tensile, (psi)kPa	Elongation, %	Wet Adhesion(lbs)kg
6	AAEMA 4.72	(115)793	63	2 0.91
7	None	(53)365	238	0.5 0.23

While particular embodiments of the invention have been described, it will be understood, of course, that the invention is not limited to these embodiments, since many of obvious modifications can be made, and it is intended to include within this invention any such modifications as will fall within the scope of the appended claims. For instance, solutions and emulsions of the described polymers containing the described functional monomers have exceptionally good adhesion to relatively non-adherent surfaces (surfaces which are particularly difficult to adhere to) such as polyurethane and smooth surfaced elastomeric and plastic materials such as ethylene-propylene-diene elastomer films, coatings and other articles even in the absence of the pigments and mastic filler materials described hereinabove, and they are particularly useful for coating and protecting closed pore foamed polyurethane insulation.

Claims

1. A coating mastic or caulking composition having a total non-volatile solids content of 60 to 90 weight percent, which solids content comprises at least 15 weight percent of a water insoluble polymer and undissolved solids other than said polymer, said undissolved solids other than said polymer constitute 30 to 60 weight percent of said composition and are selected from the group consisting of pigments, fillers, extenders, and combinations thereof, and said fillers and extenders, other than pigment, constitute 10 to 70 weight percent of said total non-volatile solids, wherein said polymer has a T_g of -50°C. to -10°C. and comprises at least one functional monomer of the formula:



in which R_1 is a divalent organic radical of at least 3 atoms in length, R_5 and R_6 are independently selected from hydrogen, hydroxy, halo, thio, amino or monovalent organic radicals, and X is $-CO-R_4$ or $-CN$, wherein R_4 is hydrogen or a monovalent organic radical, and said polymer is selected from the group consisting of

- (a) conjugated diolefin polymers comprising at least 30 weight percent of one or more conjugated diene monomers having 4 to 8 carbon atoms and 0 to 70 weight percent of one or more alkenyl substituted monoaromatic monomers;
- (b) olefin-ester interpolymers comprising at least 1 weight percent of a monoolefin monomer having up to 4 carbon atoms and at least 40 weight percent of an alkenyl or alkenol ester of a saturated carboxylic acid;
- (c) olefinically unsaturated carboxylic acid ester polymers comprising at least 40 weight percent polymerized olefinically unsaturated carboxylic acid ester monomers;
- (d) alkenyl ether polymers comprising at least 30 weight percent alkenyl ether monomer units; and
- (e) combinations thereof.

initial jaw separation of 12 mm (0.5 inch) and a jaw separation speed of 5 mm (0.2 inches) per minute. The force applied to the sample by the tester at the point of sample failure is divided by initial sample cross section at the narrowest portion of the dumbbell-shaped specimen to obtain tensile strength in pounds per square inch. Elongation is determined by dividing exposed sample length (Instron jaw separation) at the point of failure by initial sample length (initial jaw separation) and multiplying by 100 to obtain elongation expressed in percent.

Tensile strength and elongation values for the described mastic samples are reported in Table 2.


TABLE 2

Polymer of Example No.	Monomer, Wt. %	Tensile, (psi)kPa	Elongation, %	Wet Adhesion(lbs)kg
6	AAEMA 4.72	(115)793	63	2 0.91
7	None	(53)365	238	0.5 0.23

While particular embodiments of the invention have been described, it will be understood, of course, that the invention is not limited to these embodiments, since many of obvious modifications can be made, and it is intended to include within this invention any such modifications as will fall within the scope of the appended claims. For instance, solutions and emulsions of the described polymers containing the described functional monomers have exceptionally good adhesion to relatively non-adherent surfaces (surfaces which are particularly difficult to adhere to) such as polyurethane and smooth surfaced elastomeric and plastic materials such as ethylene-propylene-diene elastomer films, coatings and other articles even in the absence of the pigments and mastic filler materials described hereinabove, and they are particularly useful for coating and protecting closed pore foamed polyurethane insulation.

Claims

1. A coating mastic or caulking composition having a total non-volatile solids content of 60 to 90 weight percent, which solids content comprises at least 15 weight percent of a water insoluble polymer and undissolved solids other than said polymer, said undissolved solids other than said polymer constitute 30 to 60 weight percent of said composition and are selected from the group consisting of pigments, fillers, extenders, and combinations thereof, and said fillers and extenders, other than pigment, constitute 10 to 70 weight percent of said total non-volatile solids, wherein said polymer has a T_g of -50°C. to -10°C. and comprises at least one functional monomer of the formula:




in which R_1 is a divalent organic radical of at least 3 atoms in length, R_5 and R_6 are independently selected from hydrogen, hydroxy, halo, thio, amino or monovalent organic radicals, and X is $-CO-R_4$ or $-CN$, wherein R_4 is hydrogen or a monovalent organic radical, and said polymer is selected from the group consisting of

- (a) conjugated diolefin polymers comprising at least 30 weight percent of one or more conjugated diene monomers having 4 to 8 carbon atoms and 0 to 70 weight percent of one or more alkenyl substituted monoaromatic monomers;
- (b) olefin-ester interpolymers comprising at least 1 weight percent of a monoolefin monomer having up to 4 carbon atoms and at least 40 weight percent of an alkenyl or alkenol ester of a saturated carboxylic acid;
- (c) olefinically unsaturated carboxylic acid ester polymers comprising at least 40 weight percent polymerized olefinically unsaturated carboxylic acid ester monomers;
- (d) alkenyl ether polymers comprising at least 30 weight percent alkenyl ether monomer units; and
- (e) combinations thereof.




2. A composition according to claim 1, wherein said non-volatile solids constitute 70 to 90 weight percent of said composition, and said polymer has a T_g of -50°C . to -20°C .
3. A composition according to claim 1 or 2, comprising a thickener and in which said undissolved solids other than said polymer comprises at least 5 weight percent of an opaque, reflective pigment.
4. A composition according to claim 1, 2 or 3, wherein said composition is a water-base emulsion, said polymer has a T_g of -50°C . to -20°C ., and said undissolved solids other than said polymer comprises a pigment selected from titanium dioxide, zinc oxide, and combinations thereof.
5. A composition according to any of claims 1 to 4, which comprises a dispersion of said total solids in water, and said composition comprise at least 10 weight percent water.
6. A composition according to claim 5, wherein said solids other than said polymer comprise a pigment.
7. A composition according to any preceding claim, wherein said polymer comprises 0.1 to 40 weight percent of said functional monomer.
8. A composition according to any preceding claim, wherein said polymer comprises 0.1 to 10 weight percent of said functional monomer.
9. A composition according to any preceding claim, wherein said polymer comprises 0.1 to 5 weight percent of said functional monomer.
10. A composition according to any preceding claim, wherein said polymer comprises one or both of acrylic acid and itaconic acid.
11. A composition according to any preceding claim, which comprises a water-base mastic emulsion of said total solids dispersed in water, and said mastic is characterized by a dry adhesion to closed-foam polyurethane of at least 17.86 kg/m (1 pound per inch).
12. A composition according to any preceding claim, wherein said polymer is substantially free of cross-linking agents.
13. A composition according to any preceding claim, wherein said polymer is substantially free of polymer cross-linking polyvalent metals, compounds and complexes.
14. A composition according to any preceding claim, wherein R_1 is a divalent organic radical 3 to 40 atoms in length, and X is $-\text{CO}-R_4$.
15. A composition according to any preceding claim, wherein said polymer comprises at least 0.1 weight percent of at least one functional monomer having the formula:



- wherein R_4 , R_5 , and R_6 are as defined in claim 1, R_3 is a divalent organic radical, Y and Z are independently selected from oxygen, sulfur, and NR_7 , and R_7 is H or monovalent organic radical.
16. A composition according to claim 15, wherein R_4 is hydrogen or alkyl having up to 8 carbon atoms, and R_3 is a divalent organic radical at least 2 atoms in length.
 17. A composition according to claim 15 or 16, wherein each of Y and Z is oxygen.



18. A composition according to any preceding claim, wherein said polymer comprises 0.1 to 10 weight percent of one or both of acetoacetoxyethylmethacrylate and acetoacetoxyethylacrylate.
19. A composition according to any preceding claim, wherein said polymer comprises less than 1 weight percent of an N-methylolamide.
20. A composition according to claim 19, wherein said polymer is free of N-methylolamides.
21. A composition according to any preceding claim, wherein said polymer comprises a polymerizable carboxylic acid monomer.
22. A composition according to any preceding claim, wherein said polymer comprises at least 0.1 weight percent of a monomer selected from olefinically unsaturated carboxylic acids having up to 10 carbon atoms, sulfoalkyl esters of said olefinically unsaturated acids, and combinations thereof.
23. A composition according to any preceding claim, wherein said polymer comprises at least 40 weight percent polymerized, olefinically unsaturated, carboxylic acid ester monomers.
24. A composition according to claim 23, wherein said polymer comprises at least 0.1 weight percent of said functional monomer and at least 60 weight percent of polymerized, olefinically unsaturated, carboxylic acid ester monomers selected from esters of acrylic acid and methacrylic acid having 4 to 17 carbon atoms and combinations thereof.
25. A composition according to any preceding claim, wherein said polymer comprises at least 40 weight percent of polymerized, olefinically unsaturated, carboxylic acid ester monomers and has a number average molecular weight of at least 50,000.
26. A water-base emulsion coating mastic composition having a total undissolved solids content of 70 to 90 weight percent, which total undissolved solids comprises at least 15 weight percent of a water insoluble polymer and undissolved solids other than said polymer, said undissolved solids other than said polymer constitute 30 to 60 weight percent of said composition and are selected from the group consisting of pigments, fillers, extenders, and combinations thereof, and said fillers and extenders, other than pigment, constitute 10 to 70 weight percent of said total undissolved solids, wherein said polymer has a T_g of -50°C . to -10°C ., is permanently flexible and non-tacky when cured, and comprises pendant functional groups of the formula:




wherein R_1 is a divalent organic radical at least 3 atoms in length, R_4 is H or a monovalent organic radical, and said polymer is selected from the group consisting of

- (a) conjugated diolefin polymers comprising at least 30 weight percent of one or more conjugated diene monomers having 4 to 8 carbon atoms and 0 to 70 weight percent of one or more alkenyl-substituted monoaromatic monomers;
- (b) olefin-ester interpolymers comprising at least 1 weight percent of a monoolefin monomer having up to 4 carbon atoms and at least 40 weight percent of an alkenyl or alkenol ester of a saturated carboxylic acid;
- (c) olefinically unsaturated carboxylic acid ester polymers comprising at least 40 weight percent polymerized olefinically unsaturated carboxylic acid ester monomers;
- (d) alkenyl ether polymers comprising at least 30 weight percent alkenyl ether monomer units; and
- (e) combinations thereof.



27. A composition according to claim 26, wherein R_1 is of the formula:




wherein Y and Z are independently selected from oxygen, sulfur, and NR_7 , R_3 is a divalent organic radical at least 2 atoms in length, and R_7 is H or hydrocarbyl.

28. A composition according to claim 27, wherein R_3 is selected from substituted and unsubstituted alkylene, alkyleneoxy, alkyleneimine and alkylene-thio radicals.

29. A composition according to claim 27, wherein R_1 is an ethylene radical, R_4 is a methyl radical, and said polymer comprises 0.1 to 10 percent of said functional monomer.

30. A mastic composition according to claim 26, 28, 29, or 30, wherein said polymer comprises at least 0.1 weight percent of a polymerizable acid selected from olefinically unsaturated carboxylic acids having up to 10 carbon atoms, sulfoalkyl esters of said olefinically unsaturated acids, and combinations thereof.

31. A water base roofing mastic composition having a total undissolved solids content of 60 to 90 weight percent in which said total undissolved solids comprises at least 15 weight percent of a water insoluble polymer and undissolved solids other than said polymer, said undissolved solids other than said polymer constitute 30 to 60 weight percent of said composition and are selected from the group consisting of pigments, fillers, extenders, and combinations thereof, and said fillers and extenders, other than pigment, constitute 10 to 70 weight percent of said total non-volatile solids, wherein said polymer has a T_g of -50°C. to -10°C. , and comprises at least 0.1 weight percent pendant functional groups of the formula:



wherein R_3 is a divalent organic radical at least 2 atoms in length, R_4 is hydrogen or an organic radical, said polymer is selected from the group consisting of


- (a) olefin-ester interpolymers comprising at least 1 weight percent of a monoolefin monomer having up to 4 carbon atoms and at least 40 weight percent of an alkenyl or alkenol ester of a saturated carboxylic acid;
- (b) olefinically unsaturated carboxylic acid ester polymers comprising at least 40 weight percent polymerized olefinically unsaturated carboxylic acid ester monomers;
- (c) alkenyl ether polymers comprising at least 30 weight percent alkenyl ether monomer units; and
- (d) combinations thereof,

said polymer comprises at least 0.1 weight percent of a monomer selected from the group consisting of olefinically unsaturated carboxylic acids having up to 10 carbon atoms, sulfoalkyl esters of said olefinically unsaturated acids, and combinations thereof, and said mastic composition, when cured, has a dry adhesion to closed foam polyurethane of at least 17.86 kg/m (1 pound per inch.)

32. A roofing mastic composition comprising a water base latex containing 60 to 90 weight percent total undissolved solids, which total undissolved solids comprise at least 15 weight percent of a water-insoluble polymer and undissolved solids other than said polymer, said undissolved solids other than said polymer constitute 30 to 60 weight percent of said composition and are selected from the group consisting of pigments, fillers, extenders, and combinations thereof, and said fillers and extenders, other than pigment, constitute 10 to 70 weight percent of said total non-volatile solids, wherein said undissolved solids other than said polymer comprise at least 5 weight percent of an opaque, reflective pigment, and said polymer has a T_g of -50°C. to -10°C. , is permanently flexible and non-tacky when cured, and comprises at least 40 weight percent polymerized olefinically unsaturated carboxylic acid




ester monomers and pendant functional groups attached to the polymer backbone having the formula:



in which R_1 is a divalent organic radical at least 3 atoms in length, X is - CO - R_4 or - CN, and R_4 is hydrogen or a monovalent organic radical.

33. A relatively inflexible architectural substrate coated on at least a portion of one surface thereof with a mastic composition comprising at least 15 weight percent of a water-insoluble polymer and 25 to 85 weight percent water-insoluble solid matter other than said polymer, said water-insoluble solid matter other than said polymer is selected from the group consisting of pigments, fillers, extenders, and combinations thereof, and said fillers and extenders, other than pigment, constitute 10 to 70 weight percent of said composition, said polymer has a T_g of -50°C. to -10°C. , is permanently flexible and non-tacky when cured, and comprises pendant functional groups attached to the polymer backbone having the formula:



in which R_1 is a divalent organic radical at least 3 atoms in length, X is - CO - R_4 or - CN, and R_4 is hydrogen or a monovalent organic radical, and wherein said polymer is selected from

- (a) conjugated diolefin polymers comprising at least 30 weight percent of one or more conjugated diene monomers having 4 to 8 carbon atoms and 0 to 70 weight percent of one or more alkenyl-substituted monoaromatic monomers;
- (b) olefin-ester interpolymers comprising at least 1 weight percent of a mono-olefin monomer having up to 4 carbon atoms and at least 40 weight percent of an alkenyl or alkenol ester of a saturated carboxylic acid;
- (c) olefinically unsaturated carboxylic acid ester polymers comprising at least 40 weight percent polymerized olefinically unsaturated carboxylic acid ester monomers;
- (d) alkenyl ether polymers comprising at least 30 weight percent alkenyl ether monomer units; and
- (e) combinations thereof.


34. A relatively flexible architectural substrate coated on at least a portion of the surface thereof with a mastic in accordance with any one of claims 1 to 32.

35. A coated substrate according to claim 33 or 34, wherein said substrate is selected from polyurethane and ethylene-propylene-diene interpolymers.

36. A coated substrate according to claim 33 or 34, wherein said substrate comprises foamed polyurethane architectural insulation.

37. A composite, architectural roof structure comprising closed-foam polyurethane roofing insulation coated on its upper surface with a roofing mastic composition comprising a water-base latex containing 60 to 90 weight percent total undissolved solids, which total undissolved solids comprise at least 15 weight percent of a water-insoluble polymer, 25 to 85 weight percent undissolved solids other than said polymer, said undissolved solids other than said polymer comprise at least 5 weight percent of an opaque, reflective pigment and water-insoluble solid matter, other than said polymer and pigment, selected from the group consisting of fillers, extenders, and combinations thereof, said fillers and extenders constitute 10 to 70 weight percent of said composition, and said polymer has a T_g of -50°C. to -10°C. , is permanently flexible and non-tacky when cured, and comprises at least 40 weight percent polymerized, olefinically unsaturated carboxylic acid ester monomers and pendant functional groups attached to the polymer backbone having the formula:






in which R_1 is a divalent organic radical at least 3 atoms in length, X is $-CO-R_4$ or $-CN$, and R_4 is hydrogen or a monovalent organic radical.

10 Patentansprüche

1. Beschichtungs- oder Dichtungsmasse mit einem Gesamtgehalt nicht-flüchtiger Feststoffe von 60 bis 90 Gew.-%, wobei der Feststoffgehalt mindestens 15 Gew.-% eines wasserunlöslichen Polymers und ungelöste Feststoffe anders als das Polymer umfaßt, wobei die ungelösten Feststoffe anders als das Polymer 30 bis 60 Gew.-% der Masse ausmachen und aus der Gruppe von Pigmenten, Füllmitteln, Streckmitteln und Kombinationen davon ausgewählt sind, und die Füllmittel und Streckmittel anders als das Pigment 10 bis 70 Gew.-% der gesamten, nichtflüchtigen Feststoffe ausmachen, worin das Polymer ein T_g von $-50^\circ C$ bis $-10^\circ C$ hat und mindestens ein funktionelles Monomer der Formel:




umfaßt, worin R_1 ein zweiwertiger organischer Rest von mindestens 3 Atomen in Länge ist, R_5 und R_6 unabhängig davon aus Wasserstoff-, Hydroxy-, Halogen-, Thio-, Amino- oder einwertigen organischen Resten ausgewählt sind, und X $-CO-R_4$ oder $-CN$ ist, worin R_4 Wasserstoff oder ein einwertiger organischer Rest ist, und das Polymer aus der Gruppe ausgewählt ist, von

- (a) konjugierten Diolefinpolymeren, umfassend mindestens 30 Gew.-% von ein oder mehr konjugierten Dienmonomeren mit 4 bis 8 C-Atomen und 0 bis 70 Gew.-% von ein oder mehr Alkenyl-substituierten monoaromatischen Monomeren,
 - (b) Olefin-Esterzwischenpolymeren, umfassend mindestens 1 Gew.-% eines Monoolefinmonomers mit bis zu 4 C-Atomen und mindestens 40 Gew.-% eines Alkenyl- oder Alkenolesters einer gesättigten Carbonsäure,
 - (c) olefinisch-ungesättigten Carbonsäureesterpolymeren, umfassend mindestens 40 Gew.-% von polymerisierten, olefinisch-ungesättigten Carbonsäureestermonomeren,
 - (d) Alkenyletherpolymeren, umfassend mindestens 30 Gew.-% von Alkenylethermonomereinheiten, und
 - (e) Kombinationen davon.
2. Masse nach Anspruch 1, worin die nicht-flüchtigen Feststoffe 70 bis 90 Gew.-% der Masse ausmachen und das Polymer ein T_g von $-50^\circ C$ bis $-20^\circ C$ hat.
3. Masse nach Anspruch 1 oder 2, umfassend ein Verdickungsmittel und worin die ungelösten Feststoffe anders als das Polymer mindestens 5 Gew.-% eines undurchsichtigen, reflektierenden Pigments umfassen.
4. Masse nach Anspruch 1, 2 oder 3, worin die Masse eine Emulsion auf Wasserbasis ist, das Polymer ein T_g von $-50^\circ C$ bis $-20^\circ C$ hat und die ungelösten Feststoffe anders als das Polymer ein Pigment umfassen, das aus Titandioxid, Zinkoxid und Kombinationen davon ausgewählt ist.
5. Masse nach einem der Ansprüche 1 bis 4, umfassend eine Dispersion der Gesamtfeststoffe in Wasser und mindestens 10 Gew.-% Wasser.
6. Masse nach Anspruch 5, worin die Feststoffe anders als das Polymer ein Pigment umfassen.



7. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer 0,1 bis 40 Gew.-% des funktionellen Monomers umfaßt.
8. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer 0,1 bis 10 Gew.-% des funktionellen Monomers umfaßt.
9. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer 0,1 bis 5 Gew.-% des funktionellen Monomers umfaßt.
10. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer ein oder beide von Acrylsäure und Itaconsäure umfaßt.
11. Masse nach einem der vorhergehenden Ansprüche, umfassend eine auf Wasser basierende Massene-mulsion von in Wasser dispergierten Gesamtfeststoffen, wobei die Masse durch eine Trockenadhesion zu feingeschäumtem Polyurethan von mindestens 17,86 kg/m (1 Pfund pro Zoll) gekennzeichnet ist.
12. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer im wesentlichen frei von Quervernetzungsmitteln ist.
13. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer im wesentlichen frei von mehrwertigen Polymer-Quervernetzungsmetallen, -verbindungen und -komplexen ist.
14. Masse nach einem der vorhergehenden Ansprüche, worin R_1 ein zweiwertiger organischer Rest mit 3 bis 40 Atomen in Länge ist und $X - CO - R_4$ ist.
15. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer mindestens 0,1 Gew.-% von mindestens einem funktionellen Monomer der Formel:



- umfaßt, worin R_4 , R_5 und R_6 wie in Anspruch 1 angegeben sind, R_3 ein zweiwertiger organischer Rest ist, Y und Z unabhängig davon aus Sauerstoff, Schwefel und NR_7 ausgewählt sind und R_7 H oder ein einwertiger organischer Rest ist.
16. Masse nach Anspruch 15, worin R_4 Wasserstoff oder Alkyl mit bis zu 8 C-Atomen ist und R_3 ein zweiwertiger organischer Rest mit mindestens 2 Atomen in Länge ist.
17. Masse nach Anspruch 15 oder 16, worin jeweils Y und Z Sauerstoff ist.
18. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer 0,1 bis 10 Gew.-% von ein oder beiden von Acetoacetoxyethylmethacrylat und Acetoacetoxyethylacrylat umfaßt.
19. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer weniger als 1 Gew.-% eines N-Methylolamids umfaßt.
20. Masse nach Anspruch 19, worin das Polymer frei von N-Methylolamiden ist.
21. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer ein polymerisierbares Carbon-säuremonomer umfaßt.
22. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer mindestens 0,1 Gew.-% eines Monomers umfaßt, das aus olefinisch-ungesättigten Carbonsäuren mit bis zu 10 C-Atomen, Sulfoalkyle-tern der olefinisch-ungesättigten Säuren und Kombinationen davon ausgewählt ist.




23. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer mindestens 40 Gew.-% von polymerisierten, olefinisch-ungesättigten Carbonsäureestermonomeren umfaßt.

24. Masse nach Anspruch 23, worin das Polymer mindestens 0,1 Gew.-% des funktionellen Monomers und mindestens 60 Gew.-% von polymerisierten, olefinisch-ungesättigten Carbonsäureestermonomeren umfaßt, die aus Estern von Acrylsäure und Methacrylsäure mit 4 bis 17 C-Atomen und Kombinationen davon ausgewählt sind.

25. Masse nach einem der vorhergehenden Ansprüche, worin das Polymer mindestens 40 Gew.-% von polymerisierten, olefinisch-ungesättigten Carbonsäureestermonomeren umfaßt und ein Zahldurchschnittsmolekulargewicht von mindestens 50.000 hat.

26. Eine auf Wasser basierende Emulsionsbeschichtungsmasse mit einem Gesamtgehalt ungelöster Feststoffe von 70 bis 90 Gew.-%, wobei die gesamten, ungelösten Feststoffe mindestens 15 Gew.-% eines wasserunlöslichen Polymers und ungelöste Feststoffe anders als das Polymer umfassen, wobei die ungelösten Feststoffe anders als das Polymer 30 bis 60 Gew.-% der Masse ausmachen und aus der Gruppe von Pigmenten, Füllmitteln, Streckmitteln und Kombinationen davon ausgewählt sind, und die Füllmittel und Streckmittel anders als das Pigment 10 bis 70 Gew.-% der gesamten, ungelösten Feststoffe ausmachen, worin das Polymer ein T_g von $-50\text{ }^{\circ}\text{C}$ bis $-10\text{ }^{\circ}\text{C}$ hat, ständig biegsam und bei Aushärtung nicht klebrig ist und anhängende funktionelle Reste der Formel:



umfaßt, worin R_1 ein zweiwertiger organischer Rest mit mindestens 3 Atomen in Länge ist, R_4 H oder ein einwertiger organischer Rest ist und das Polymer ausgewählt ist, von:

(a) konjugierten Diolefinpolymeren, umfassend mindestens 30 Gew.-% von ein oder mehr konjugierten Dienmonomeren mit 4 bis 8 C-Atomen und 0 bis 70 Gew.-% von ein oder mehr Alkenyl-substituierten monoaromatischen Monomeren,

(b) Olefin-Esterzwischenpolymeren, umfassend mindestens 1 Gew.-% eines Monoolefinmonomers mit bis zu 4 C-Atomen und mindestens 40 Gew.-% eines Alkenyl- oder Alkenolesters einer gesättigten Carbonsäure,

(c) olefinisch-ungesättigten Carbonsäureesterpolymeren, umfassend mindestens 40 Gew.-% von polymerisierten, olefinisch-ungesättigten Carbonsäureestermonomeren,

(d) Alkenyletherpolymeren, umfassend mindestens 30 Gew.-% von Alkenylethermonomer-Einheiten, und

(e) Kombinationen davon.

27. Masse nach Anspruch 26, worin R_1 die Formel:



hat, worin Y und Z unabhängig davon aus Sauerstoff, Schwefel und NR_7 ausgewählt sind, R_3 ein zweiwertiger organischer Rest mit mindestens 2 Atomen in Länge ist und R_7 H oder Hydrocarbyl ist.

28. Masse nach Anspruch 27, worin R_3 aus substituierten und nicht-substituierten Alkylen-, Alkylenoxy-, Alkylenimin- und Alkylenthio-Resten ausgewählt ist.


29. Masse nach Anspruch 27, worin R_1 ein Ethylen-Rest ist, R_4 ein Methyl-Rest ist und das Polymer 0,1 bis 10 % des funktionellen Monomers umfaßt.

30. Masse nach Anspruch 26, 28, 29 oder 30, worin das Polymer mindestens 0,1 Gew.-% einer polymerisierbaren Säure umfaßt, die aus olefinisch-ungesättigten Carbonsäuren mit bis zu 10 C-Atomen,



Sulfoalkylestern der olefinisch-ungesättigten Säuren und Kombinationen davon ausgewählt ist.

31. Auf Wasser basierende Dachmasse mit einem Gesamtgehalt ungelöster Feststoffe von 60 bis 90 Gew.-%, worin die gesamten, ungelösten Feststoffe mindestens 15 Gew.-% eines wasserunlöslichen Polymers und ungelöste Feststoffe anders als das Polymer umfassen, wobei die ungelösten Feststoffe anders als das Polymer 30 bis 60 Gew.-% der Masse ausmachen und aus der Gruppe von Pigmenten, Füllmitteln, Streckmitteln und Kombinationen davon ausgewählt sind und die Füllmittel und Streckmittel anders als das Pigment 10 bis 70 Gew.-% der gesamten, nicht-flüchtigen Feststoffe ausmachen, worin das Polymer ein T_g von -50°C bis -10°C hat und mindestens 0,1 Gew.-% von anhängenden funktionellen Resten der Formel:




umfaßt, worin R_3 ein zweiwertiger organischer Rest mit mindestens 2 Atomen in Länge ist, R_4 Wasserstoff oder ein organischer Rest ist, das Polymer aus der Gruppe ausgewählt ist, von

- (a) Olefin-Esterzwischenpolymeren, umfassend mindestens 1 Gew.-% eines Monoolefinmonomers mit bis zu 4 C-Atomen und mindestens 40 Gew.-% eines Alkenyl- oder Alkenolesters einer gesättigten Carbonsäure,
- (b) olefinisch-ungesättigten Carbonsäureesterpolymeren, umfassend mindestens 40 Gew.-% von polymerisierten olefinisch-ungesättigten Carbonsäureestermonomeren,
- (c) Alkenyletherpolymeren, umfassend mindestens 30 Gew.-% von Alkenylethermonomer-Einheiten, und
- (d) Kombinationen davon,

das Polymer mindestens 0,1 Gew.-% eines Monomers umfaßt, das aus der Gruppe von olefinisch-ungesättigten Carbonsäuren mit bis zu 10 C-Atomen, Sulfoalkylestern der olefinisch-ungesättigten Säuren, und Kombinationen davon ausgewählt ist, und die Masse bei Härtung eine Trockenadhesion zu feingeschäumtem Polyurethan von mindestens 17,86 kg/m (1 Pfund pro Zoll) hat.

32. Dach-Masse, umfassend einen auf Wasser basierenden Latex mit 60 bis 90 Gew.-% von ungelösten Gesamtfeststoffen, wobei die ungelösten Gesamtfeststoffe mindestens 15 Gew.-% eines wasserunlöslichen Polymers und ungelöste Feststoffe anders als das Polymer umfassen, wobei die ungelösten Feststoffe anders als das Polymer 30 bis 60 Gew.-% der Masse ausmachen und aus der Gruppe von Pigmenten, Füllmitteln, Streckmitteln und Kombinationen davon ausgewählt sind, und die Füllmittel und Streckmittel anders als das Pigment 10 bis 70 Gew.-% der gesamten, nicht-flüchtigen Feststoffe ausmachen, worin die ungelösten Feststoffe anders als das Polymer mindestens 5 Gew.-% eines undurchsichtigen, reflektierenden Pigments umfassen, und das Polymer ein T_g von -50°C bis -10°C hat, ständig biegsam und bei Aushärtung nicht klebrig ist, und mindestens 40 Gew.-% von polymerisierten, olefinisch-ungesättigten Carbonsäureestermonomeren und anhängende, an das Polymerrückgrat gebundene funktionelle Reste der Formel




umfaßt, worin R_1 ein zweiwertiger organischer Rest mit mindestens 3 Atomen in Länge ist, X - CO - R_4 oder - CN ist und R_4 Wasserstoff oder ein einwertiger organischer Rest ist.

33. Relativ starres Architektursubstrat, beschichtet auf mindestens einem Teil einer Oberfläche davon mit einer Masse, umfassend mindestens 15 Gew.-% eines wasserunlöslichen Polymers und 25 bis 85 Gew.-% eines wasserunlöslichen Festkörpers anders als das Polymer, wobei der wasserunlösliche Festkörper anders als das Polymer aus der Gruppe von Pigmenten, Füllmitteln, Streckmitteln und Kombinationen davon ausgewählt ist, und die Füllmittel und Streckmittel anders als das Pigment 10 bis 70 Gew.-% der Masse ausmachen, das Polymer ein T_g von -50°C bis -10°C hat, ständig biegsam und bei Aushärtung nicht klebrig ist, und anhängende, an das Polymerrückgrat gebundene funktionelle



Reste der Formel:



umfaßt, worin R_1 ein zweiwertiger organischer Rest mit mindestens 3 Atomen in Länge ist, $\text{X} - \text{CO} - \text{R}_4$ oder $-\text{CN}$ ist und R_4 Wasserstoff oder ein einwertiger organischer Rest ist, und das Polymer ausgewählt ist, von


- (a) konjugierten Diolefinpolymeren, umfassend mindestens 30 Gew.-% von ein oder mehr konjugierten Dienmonomeren mit 4 bis 8 C-Atomen und 0 bis 70 Gew.-% von ein oder mehr Alkenyl-substituierten monoaromatischen Monomeren,
- (b) Olefin-Esterzwischenpolymeren, umfassend mindestens 1 Gew.-% eines Monoolefinmonomers mit bis zu 4 C-Atomen und mindestens 40 Gew.-% eines Alkenyl- oder Alkenolesters einer gesättigten Carbonsäure,
- (c) olefinisch-ungesättigten Carbonsäureesterpolymeren, umfassend mindestens 40 Gew.-% von polymerisierten, olefinisch-ungesättigten Carbonsäureestermonomeren,
- (d) Alkenyletherpolymeren, umfassend mindestens 30 Gew.-% von Alkenylethermonomer-Einheiten und
- (e) Kombinationen davon.

34. Relativ starres Architektursubstrat, beschichtet auf mindestens einem Teil der Oberfläche davon mit einer Masse nach einem der Ansprüche 1 bis 32.

35. Beschichtetes Substrat nach Anspruch 33 oder 34, worin das Substrat aus Polyurethan- und Ethylenpropylen-Zwischenpolymeren ausgewählt ist.

36. Beschichtetes Substrat nach Anspruch 33 oder 34, worin das Substrat eine geschäumte Polyurethan-Architekturisolierung umfaßt.

37. Verbund-Architektur-Dachstruktur, umfassend eine feingeschäumte Polyurethan-Dachisolierung, beschichtet auf ihrer äußeren Oberfläche mit einer Dach-Masse, umfassend einen auf Wasser basierenden Latex mit 60 bis 90 Gew.-% ungelöster Gesamtstoffe, wobei die gesamten, ungelösten Feststoffe mindestens 15 Gew.-% eines wasserunlöslichen Polymers, 25 bis 85 Gew.-% ungelöster Feststoffe anders als das Polymer umfassen, wobei die ungelösten Feststoffe anders als das Polymer mindestens 5 Gew.-% eines undurchsichtigen, reflektierenden Pigments und einen wasserunlöslichen Festkörper anders als das Polymer und das Pigment umfassen, der aus der Gruppe von Füllmitteln, Streckmitteln und Kombinationen davon ausgewählt ist, die Füllmittel und Streckmittel 10 bis 70 Gew.-% der Masse ausmachen und das Polymer ein T_g von -50°C bis -10°C hat, ständig biegsam und bei Aushärtung nicht klebrig ist und mindestens 40 Gew.-% von polymerisierten, olefinisch-ungesättigten Carbonsäureestermonomeren und anhängende, an das Polymerrückgrat gebundene funktionelle Reste der Formel:




umfaßt, worin R_1 ein zweiwertiger organischer Rest mit mindestens 3 Atomen in Länge ist, $\text{X} - \text{CO} - \text{R}_4$ oder $-\text{CN}$ ist und R_4 Wasserstoff oder einwertiger organischer Rest ist.



Revendications

1. Composition de mastic d'enrobage ou de calfatage ayant une teneur totale en solides non volatils de 60 à 90 pourcents en poids, ladite teneur en solides comprenant au moins 15 pourcents en poids d'un polymère insoluble dans l'eau et de solides non dissous autres que ledit polymère, lesdits solides non dissous autres que ledit polymère constituant 30 à 60 pourcents en poids de ladite composition et étant choisis parmi le groupe comprenant les pigments, les charges, les diluants et leurs combinaisons, lesdites charges et lesdits diluants autres que les pigments représentant de 10 à 70 pourcents en poids des solides totaux non volatils, composition dans laquelle ledit polymère a une T_g de -50°C à -10°C et renferme au moins un monomère fonctionnel de formule:




dans laquelle R_1 est un radical organique divalent d'une longueur d'au moins 3 atomes, R_5 et R_6 sont choisis indépendamment parmi l'hydrogène, un radical hydroxy, halo, thio, amino ou des radicaux organiques monovalents et X est $-\text{CO} - R_4$ ou $-\text{CN}$, où R_4 est de l'hydrogène ou un radical organique monovalent et ledit polymère est choisi à partir du groupe comprenant:

- (a) les polymères dioléfiniques conjugués comprenant au moins 30 pourcents en poids d'un ou plusieurs monomères diéniques conjugués ayant de 4 à 8 atomes de carbone et 0 à 70 pourcents en poids d'un ou plusieurs monomères monoaromatiques à substitution alcényle;
- (b) les interpolymères oléfine-ester comprenant au moins 1 pourcent en poids d'un monomère monooléfinique ayant jusqu'à 4 atomes de carbone et au moins 40 pourcents en poids d'un alcényl ou alcénol-ester d'un acide carboxylique saturé;
- (c) des polymères ester d'acide carboxylique à insaturation oléfinique comprenant au moins 40 pourcents en poids de monomères polymérisés ester d'acide carboxylique à insaturation oléfinique;
- (d) des alcényl-éther-polymères comprenant au moins 30 pourcents en poids d'unités monomères alcényl-éther; et
- (e) leurs combinaisons.

2. Composition selon la revendication 1, dans laquelle lesdits solides non volatils représentent de 70 à 90 pourcents en poids de ladite composition et ledit polymère a une T_g de -50°C à -20°C .
3. Composition selon la revendication 1 ou 2, comprenant un épaississant et dans laquelle lesdits solides non dissous autres que ledit polymère comprennent au moins 5 pourcents en poids d'un pigment réflecteur opaque.
4. Composition selon l'une quelconque des revendications 1, 2 ou 3, dans laquelle ladite composition est une émulsion à base d'eau, ledit polymère a une T_g de -50°C à -20°C et lesdits solides non dissous autres que ledit polymère comprennent un pigment choisi à partir du dioxyde de titane, de l'oxyde de zinc et de leurs combinaisons.
5. Composition selon l'une quelconque des revendications 1 à 4, qui comprend une dispersion desdits solides totaux dans l'eau, et ladite composition comprend au moins 10 pourcents en poids d'eau.
6. Composition selon la revendication 5, dans laquelle lesdits solides autres que ledit polymère comprennent un pigment.
7. Composition selon l'une quelconque des revendications 1 à 6, dans laquelle ledit polymère comprend 0,1 à 40 pourcents en poids dudit monomère fonctionnel.
8. Composition selon l'une quelconque des revendications 1 à 7, dans laquelle ledit polymère comprend 0,1 à 10 pourcents en poids dudit monomère fonctionnel.



9. Composition selon l'une quelconque des revendications 1 à 8, dans laquelle ledit polymère comprend 0,1 à 5 pourcents en poids dudit monomère fonctionnel.
10. Composition selon l'une quelconque des revendications 1 à 9, dans laquelle ledit polymère comprend l'acide acrylique ou l'acide itaconique ou les deux.
11. Composition selon l'une quelconque des revendications 1 à 10, qui comprend une émulsion de mastic à base d'eau desdits solides totaux dispersés dans l'eau et ledit mastic est caractérisé par une adhésion à sec au polyuréthane alvéolaire d'au moins 17,86 kg/m (1 livre par pouce).
12. Composition selon l'une quelconque des revendications 1 à 11, dans laquelle ledit polymère est essentiellement exempt d'agents de réticulation.
13. Composition selon l'une quelconque des revendications 1 à 12, dans laquelle ledit polymère est essentiellement exempt de métaux polyvalents, composés et complexes de réticulation de polymères.
14. Composition selon l'une quelconque des revendications 1 à 13, dans laquelle R_1 est un radical organique divalent d'une longueur de 3 à 40 atomes et X est $-\text{CO} - R_4$.
15. Composition selon l'une quelconque des revendications 1 à 14, dans laquelle ledit polymère comprend au moins 0,1 pourcent en poids d'au moins un monomère fonctionnel répondant à la formule:




dans laquelle R_4 , R_5 et R_6 sont comme définis dans la revendication 1, R_3 est un radical organique divalent, Y et Z sont choisis indépendamment à partir de l'oxygène, du soufre et NR_7 et R_7 est de l'hydrogène ou un radical organique monovalent.

16. Composition selon la revendication 15, dans laquelle R_4 est de l'hydrogène ou un radical alkyle ayant jusqu'à 8 atomes de carbone et R_3 est un radical organique divalent d'une longueur d'au moins deux atomes.
17. Composition selon la revendication 15 ou 16, dans laquelle chacun des radicaux Y et Z est de l'oxygène.
18. Composition selon l'une quelconque des revendications précédentes, dans laquelle le polymère comprend de 0,1 à 10 pourcents en poids d'acétoacétoxyéthylméthacrylate, d'acétoacétoxyéthylacrylate ou des deux.
19. Composition selon l'une quelconque des revendications précédentes, dans laquelle ledit polymère comprend moins de 1 pourcent en poids d'un N-méthylolamide.
20. Composition selon la revendication 19, dans laquelle ledit polymère est exempt de N-méthylolamides.
21. Composition selon l'une quelconque des revendications précédentes, dans laquelle ledit polymère comprend un monomère d'acide carboxylique polymérisable.
22. Composition selon l'une quelconque des revendications précédentes, dans laquelle ledit polymère comprend au moins 0,1 pourcent en poids d'un monomère choisi à partir des acides carboxyliques à insaturation oléfinique renfermant jusqu'à 10 atomes de carbone, des sulfoalkyl-esters desdits acides à insaturation oléfinique et de leurs combinaisons.
23. Composition selon l'une quelconque des revendications précédentes, dans laquelle ledit polymère comprend au moins 40 pourcents en poids de monomères polymérisés ester d'acide carboxylique à



insaturation oléfinique.


24. Composition selon la revendication 23, dans laquelle ledit polymère comprend au moins 0,1 pourcent en poids dudit monomère fonctionnel et au moins 60 pourcents en poids de monomères polymérisés ester d'acide carboxylique à insaturation oléfinique choisis à partir des esters d'acide acrylique et d'acide méthacrylique ayant 4 à 17 atomes de carbone et leurs combinaisons.
25. Composition selon l'une quelconque des revendications précédentes, dans laquelle ledit polymère comprend au moins 40 pourcents en poids de monomères polymérisés ester d'acide carboxylique à insaturation oléfinique et a un poids moléculaire moyen en nombre d'au moins 50.000.
26. Composition de mastic d'enrobage sous forme d'une émulsion à base d'eau ayant une teneur totale en solides non dissous de 70 à 90 pourcents en poids, lesdits solides non dissous totaux représentant au moins 15 pourcents en poids d'un polymère insoluble dans l'eau et de solides non dissous autres que ledit polymère, lesdits solides non dissous autres que ledit polymère constituant 30 à 60 pourcents en poids de ladite composition et étant choisis parmi le groupe comprenant les pigments, les charges, les diluants et leurs combinaisons et lesdites charges et diluants autres que les pigments représentant 10 à 70 pourcents en poids des solides non dissous totaux, composition dans laquelle ledit polymère a une T_g de -50°C à -10°C , est souple de façon permanente et non collant lorsqu'il a durci et comprend des groupes fonctionnels pendants de formule:



dans laquelle R_1 est un radical organique divalent d'une longueur d'au moins 3 atomes, R_4 est de l'hydrogène ou un radical organique monovalent et ledit polymère est choisi à partir du groupe comprenant:

- (a) les polymères dioléfiniques conjugués comprenant au moins 30 pourcents en poids d'un ou plusieurs monomères diéniques conjugués ayant de 4 à 8 atomes de carbone et 0 à 70 pourcents en poids d'un ou plusieurs monomères monoaromatiques à substitution alcényle;
- (b) les interpolymères oléfine-ester comprenant au moins 1 pourcent en poids d'un monomère monooléfinique ayant jusqu'à 4 atomes de carbone et au moins 40 pourcents en poids d'un alcényl ou alcénol-ester d'un acide carboxylique saturé;
- (c) des polymères ester d'acide carboxylique à insaturation oléfinique comprenant au moins 40 pourcents en poids de monomères polymérisés ester d'acide carboxylique à insaturation oléfinique;
- (d) des alcényl-éther-polymères comprenant au moins 30 pourcents en poids d'unités monomères alcényl-éther; et
- (e) leurs combinaisons.

27. Composition selon la revendication 26, dans laquelle R_1 répond à la formule:



dans laquelle Y et Z sont choisis indépendamment à partir de l'oxygène, du soufre et NR_7 , R_3 est un radical organique divalent d'au moins une longueur de 2 atomes et R_7 est de l'hydrogène ou un radical hydrocarbyle.


28. Composition selon la revendication 27, dans laquelle R_3 est choisi à partir des radicaux alkylène, alkylèneoxy, alkylèneimine et alkylène-thio substitués et non substitués.



29. Composition selon la revendication 27, dans laquelle R_1 est un radical éthylène, R_4 est un radical méthyle et ledit polymère renferme de 0,1 à 10 pourcents dudit monomère fonctionnel.

30. Composition de mastic selon l'une des revendications 26, 28, 29 ou 30, dans laquelle ledit polymère comprend au moins 0,1 pourcent en poids d'un acide polymérisable choisi parmi les acides carboxyliques à insaturation oléfinique ayant jusqu'à 10 atomes de carbone, les sulfoalkyl-esters desdits acides à insaturation oléfinique et leurs combinaisons.

31. Composition de mastic pour toitures à base d'eau ayant une teneur totale en solides non dissous de 60 à 90 pourcents en poids dans laquelle lesdits solides non dissous totaux comprennent au moins 15 pourcents en poids d'un polymère insoluble dans l'eau et des solides non dissous autres que ledit polymère, lesdits solides non dissous autres que ledit polymère représentant de 30 à 60 pourcents en poids de ladite composition et étant choisis parmi le groupe comprenant les pigments, les charges, les diluants et leurs combinaisons, lesdites charges et diluants autres que lesdits pigments représentant de 10 à 70 pourcents en poids desdits solides non volatils totaux, composition dans laquelle ledit polymère a une T_g de -50°C à -10°C et comprend au moins 0,1 pourcent en poids de groupes fonctionnels pendants de formule:



dans laquelle R_3 est un radical organique divalent d'une longueur d'au moins 2 atomes, R_4 est de l'hydrogène ou un radical organique, ledit polymère étant choisi parmi le groupe comprenant:

(a) des interpolymères oléfine-ester comprenant au moins 1 pourcent en poids d'un monomère monooléfinique ayant jusqu'à 4 atomes de carbone et au moins 40 pourcents en poids d'un alcényle ou alcénol-ester d'un acide carboxylique saturé;


(b) des polymères ester d'acide carboxylique à insaturation oléfinique, comprenant au moins 40 pourcents en poids de monomères polymérisés ester d'acide carboxylique à insaturation oléfinique;

(c) des alcényle-éther-polymères comprenant au moins 30 pourcents en poids d'unités monomères alcényle-éther; et

(d) leurs combinaisons.


ledit polymère renfermant au moins 0,1 pourcent en poids d'un monomère choisi à partir du groupe comprenant des acides carboxyliques à insaturation oléfinique ayant jusqu'à 10 atomes de carbone, les sulfoalkyl-esters desdits acides à insaturation oléfinique et leurs combinaisons, et ladite composition de mastic lorsqu'elle a durci a une adhésion à sec au polyuréthane alvéolaire d'au moins 17,86 kg/m (1 livre par pouce).

32. Composition de mastic pour toitures comprenant un latex à base d'eau contenant 60 à 90 pourcents en poids de solides non dissous totaux, lesquels solides non dissous totaux comprenant au moins 15 pourcents en poids d'un polymère insoluble dans l'eau et des solides non dissous autres que ledit polymère, lesdits solides non dissous autres que ledit polymère représentant 30 à 60 pourcents en poids de ladite composition et étant choisis parmi le groupe comprenant les pigments, les charges, les diluants et leurs combinaisons, lesdites charges et diluants autres que lesdits pigments représentant 10 à 70 pourcents des solides totaux non volatils, composition dans laquelle lesdits solides non dissous autres que ledit polymère comprennent au moins 5 pourcents en poids d'un pigment réflecteur opaque et ledit polymère a une T_g de -50°C à -10°C , est souple de façon permanente et non collant lorsqu'il a durci et comprend au moins 40 pourcents en poids de monomères polymérisés ester d'acide carboxylique à insaturation oléfinique et des groupes fonctionnels pendants fixés à l'ossature du polymère répondant à la formule:



dans laquelle R_1 est un radical organique divalent d'une longueur d'au moins 3 atomes, X est - CO - R_4 ou - CN, et R_4 est de l'hydrogène ou un radical organique monovalent.

33. Substrat de construction relativement inflexible enrobé sur au moins une partie d'une surface de celui-ci avec une composition de mastic comprenant au moins 15 pourcents en poids d'un polymère insoluble dans l'eau et 25 à 85 pourcents en poids de matière solide insoluble dans l'eau autre que ledit polymère ladite matière solide insoluble dans l'eau autre que ledit polymère étant choisie parmi le groupe comprenant les pigments, les charges, les diluants et leurs combinaisons et lesdites charges et lesdits diluants autres que les pigments constituant 10 à 70 pourcents en poids de ladite composition, ledit polymère ayant une T_g de -50°C à -10°C , étant flexible de façon permanente et non collant lorsqu'il a durci et comportant des groupes fonctionnels pendants fixés à l'ossature du polymère répondant à la formule:




dans laquelle R_1 est un radical organique divalent d'une longueur d'au moins 3 atomes, X est - CO - R_4 ou - CN, et R_4 est de l'hydrogène ou un radical organique monovalent, et dans laquelle ledit polymère est choisi parmi;

- (a) les polymères dioléfiniques conjugués comprenant au moins 30 pourcents en poids d'un ou plusieurs monomères diéniques conjugués ayant de 4 à 8 atomes de carbone et 0 à 70 pourcents en poids d'un ou plusieurs monomères monoaromatiques à substitution alcényle;
- (b) les interpolymères oléfine-ester comprenant au moins 1 pourcent en poids d'un monomère monooléfinique ayant jusqu'à 4 atomes de carbone et au moins 40 pourcents en poids d'un alcényl ou alcénol-ester d'un acide carboxylique saturé;
- (c) des polymères ester d'acide carboxylique à insaturation oléfinique comprenant au moins 40 pourcents en poids de monomères polymérisés ester d'acide carboxylique à insaturation oléfinique;
- (d) des alcényl-éther-polymères comprenant au moins 30 pourcents en poids d'unités monomères alcényl-éther; et
- (e) leurs combinaisons.

34. Substrat de construction relativement souple enrobé sur au moins une partie de sa surface avec un mastic selon l'une quelconque des revendications 1 à 32.
35. Substrat enrobé selon la revendication 33 ou la revendication 34, dans lequel ledit substrat est choisi parmi les interpolymères de polyuréthane et d'éthylène-propylène-diène.
36. Substrat enrobé selon la revendication 33 ou 34, dans lequel le substrat comprend une isolation architecturale en polyuréthane alvéolaire.

37. Structure de toiture de construction composite comprenant une isolation de toiture en polyuréthane alvéolaire à cellules fermées, revêtue sur sa surface supérieure d'une composition de mastic pour toiture comprenant un latex à base d'eau contenant 60 à 90 pourcents en poids de solides non dissous totaux, lesdits solides non dissous totaux comprenant au moins 15 pourcents en poids d'un polymère insoluble dans l'eau, 25 à 85 pourcents en poids de solides non dissous autres que ledit polymère, lesdits solides non dissous autres que ledit polymère comportant au moins 5 pourcents en poids d'un pigment réflecteur opaque et d'une matière solide insoluble dans l'eau autre que ledit polymère et ledit pigment, choisie parmi le groupe comprenant les charges, les diluants et leurs combinaisons, lesdites charges et lesdits diluants représentant de 10 à 70 pourcents en poids de ladite composition et ledit polymère ayant une T_g de -50°C à -10°C , étant souple de façon permanente et non collant lorsqu'il a durci et comprenant au moins 40 pourcents en poids de monomères polymérisés ester d'acide carboxylique à insaturation oléfinique et de groupes fonctionnels pendants fixés à l'ossature du polymère, répondant à la formule:





5

dans laquelle R_1 est un radical organique divalent d'une longueur d'au moins 3 atomes, X est - CO - R_4 ou - CN et R_4 est de l'hydrogène ou un radical organique monovalent.

10

15

20

25

30

35

40

45

50

55

