




[図1]

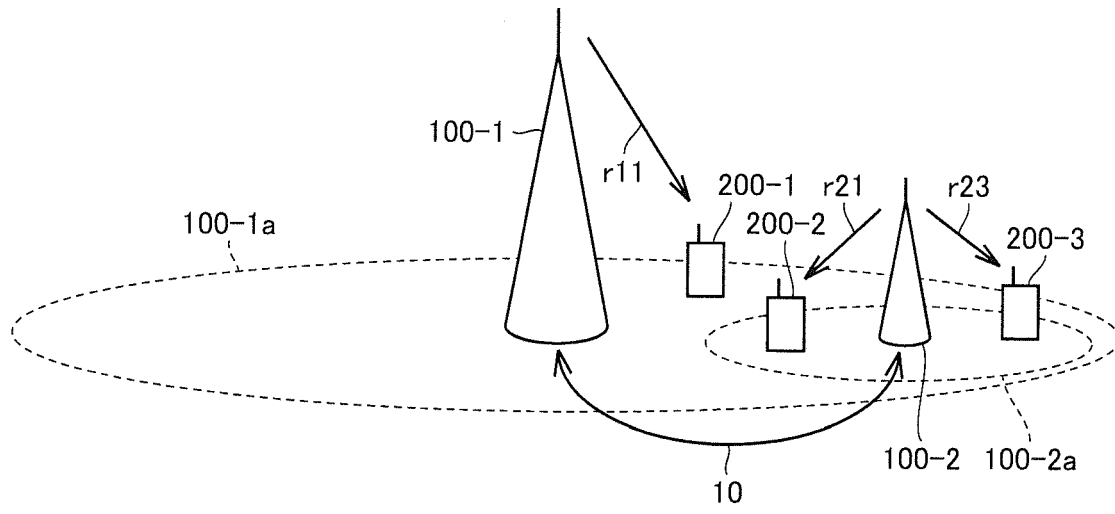

[図2]

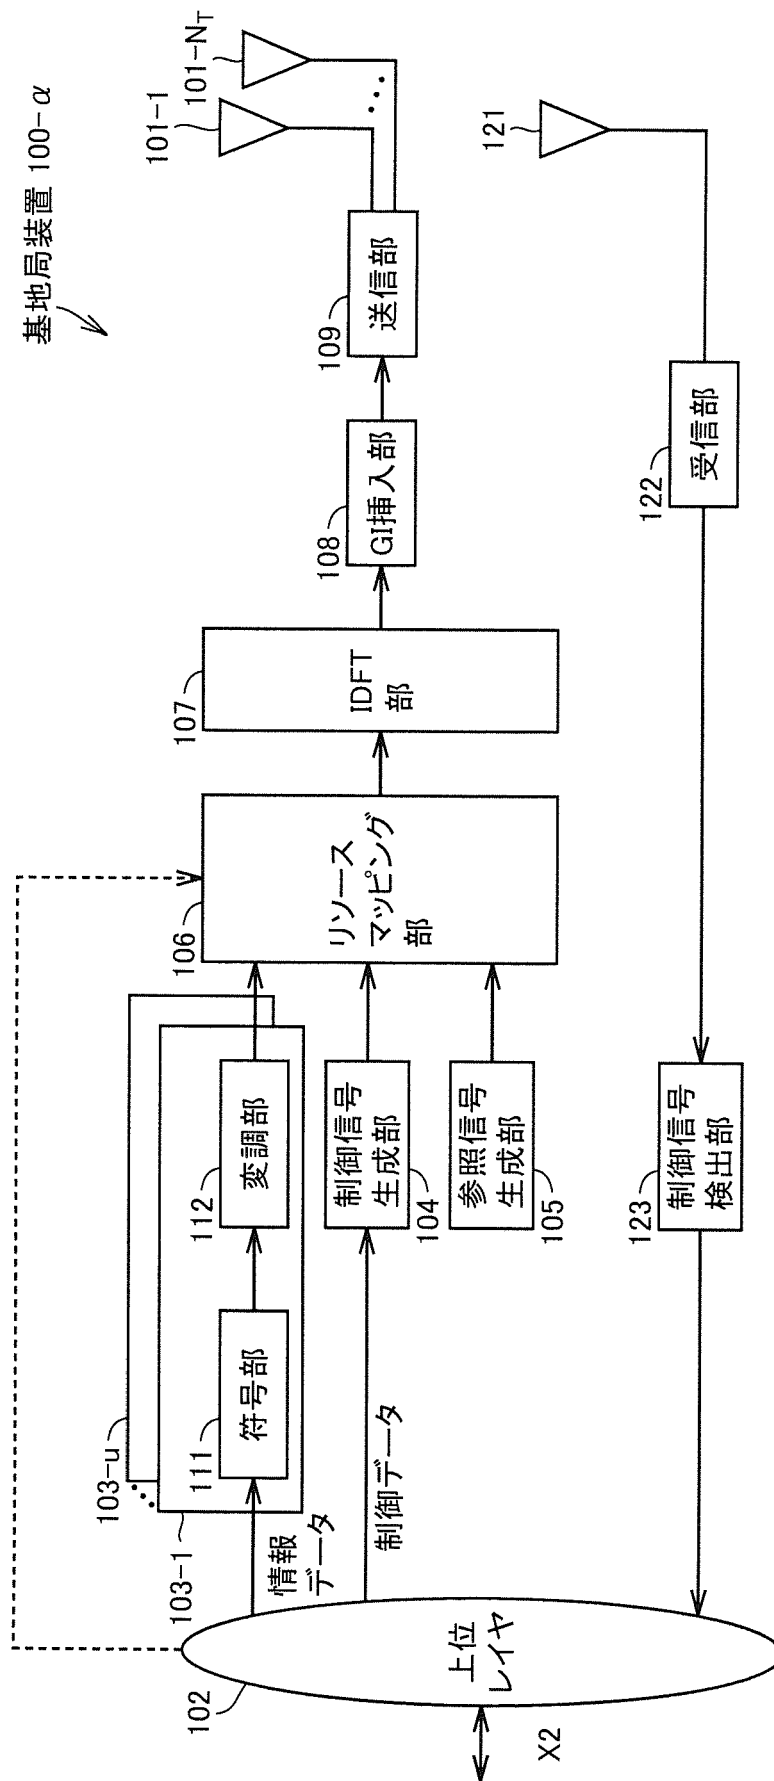

[図4]

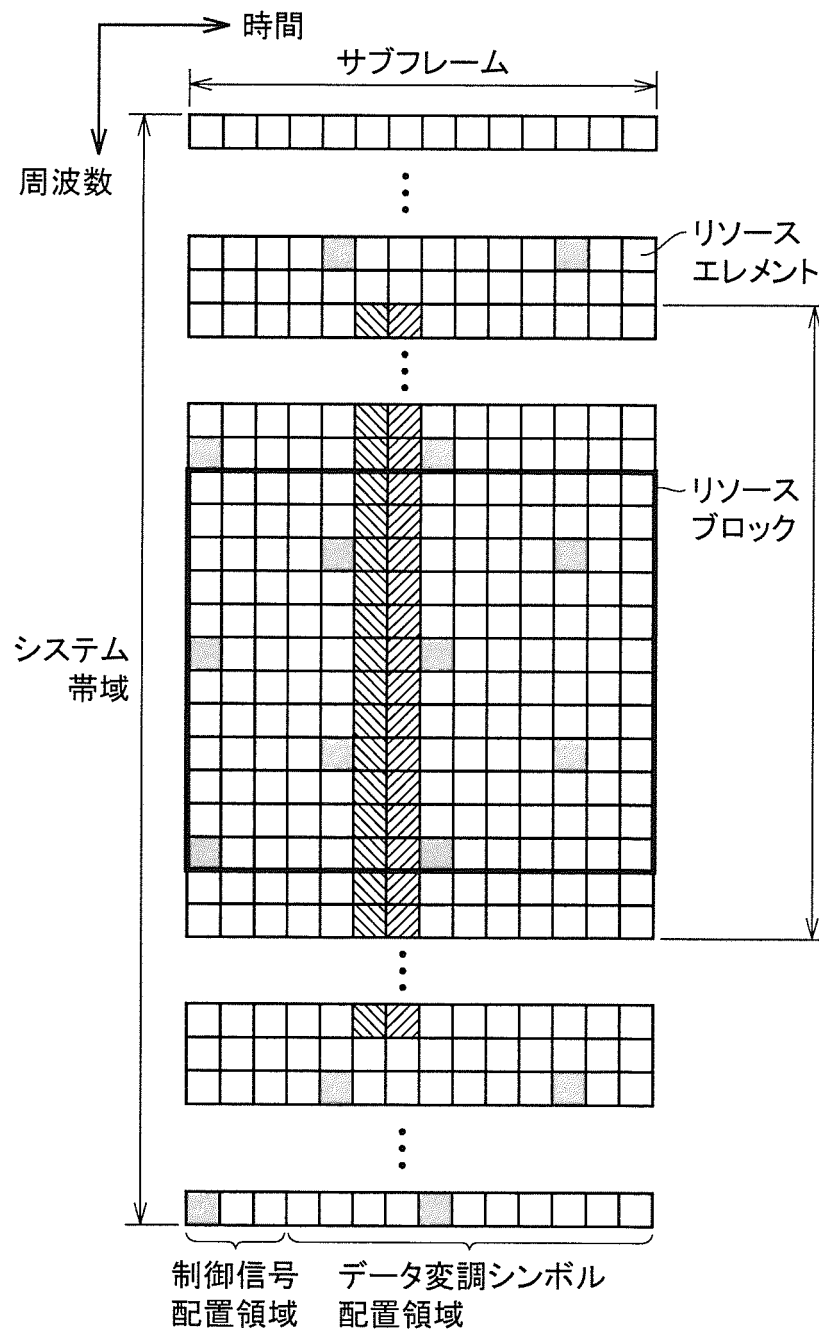

時間

サブフレーム

リソースブロック

周波数

1				0				1					0		
0				1				0					1		
1				0				1					0		
0				1				0					1		

時間


サブフレーム

周波数


リソースブロック

1	3			0			1	2			0				
0	2			1			0	3			1				
1	3			0			1	2			0				
0	2			1			0	3			1				


[図7]

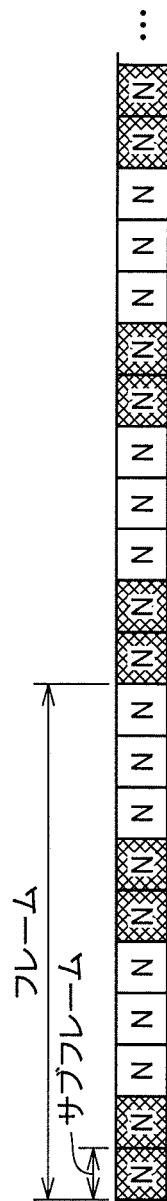


[図8]

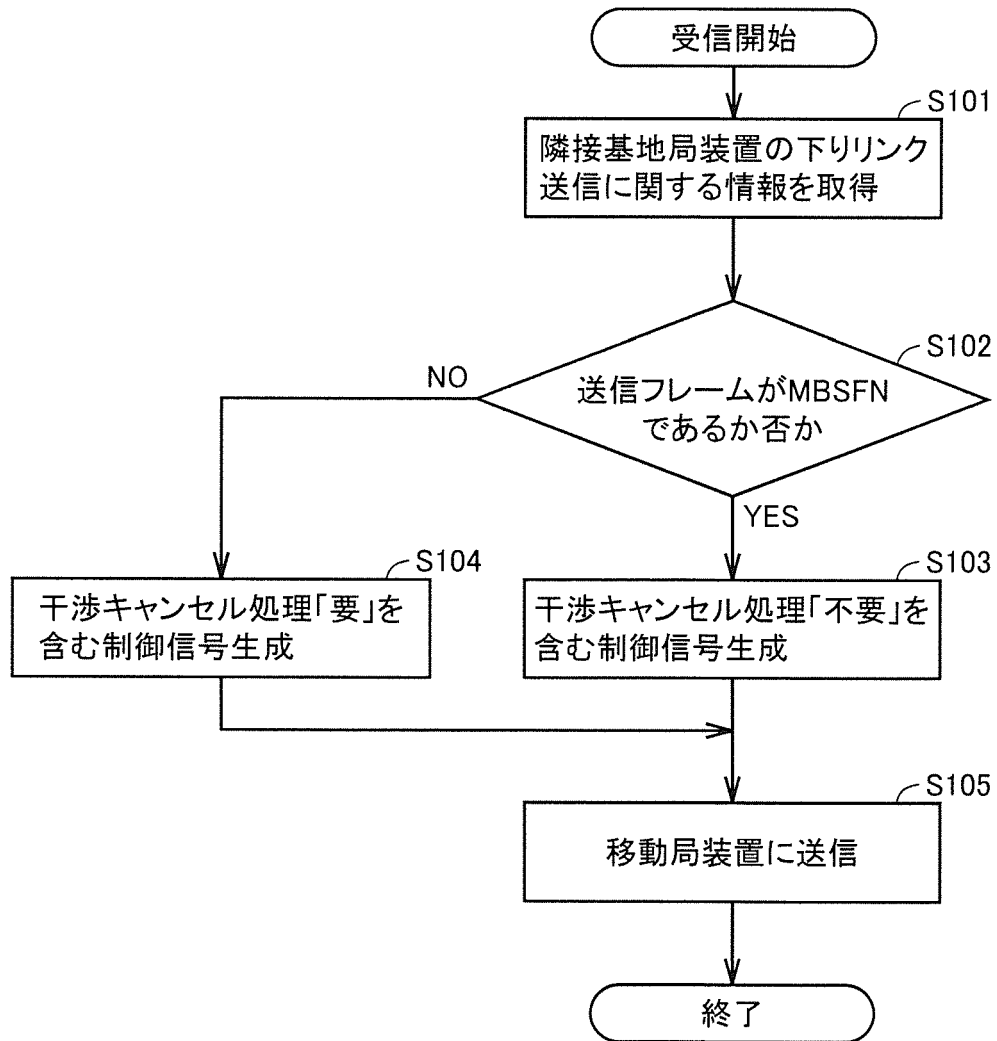


[図9]

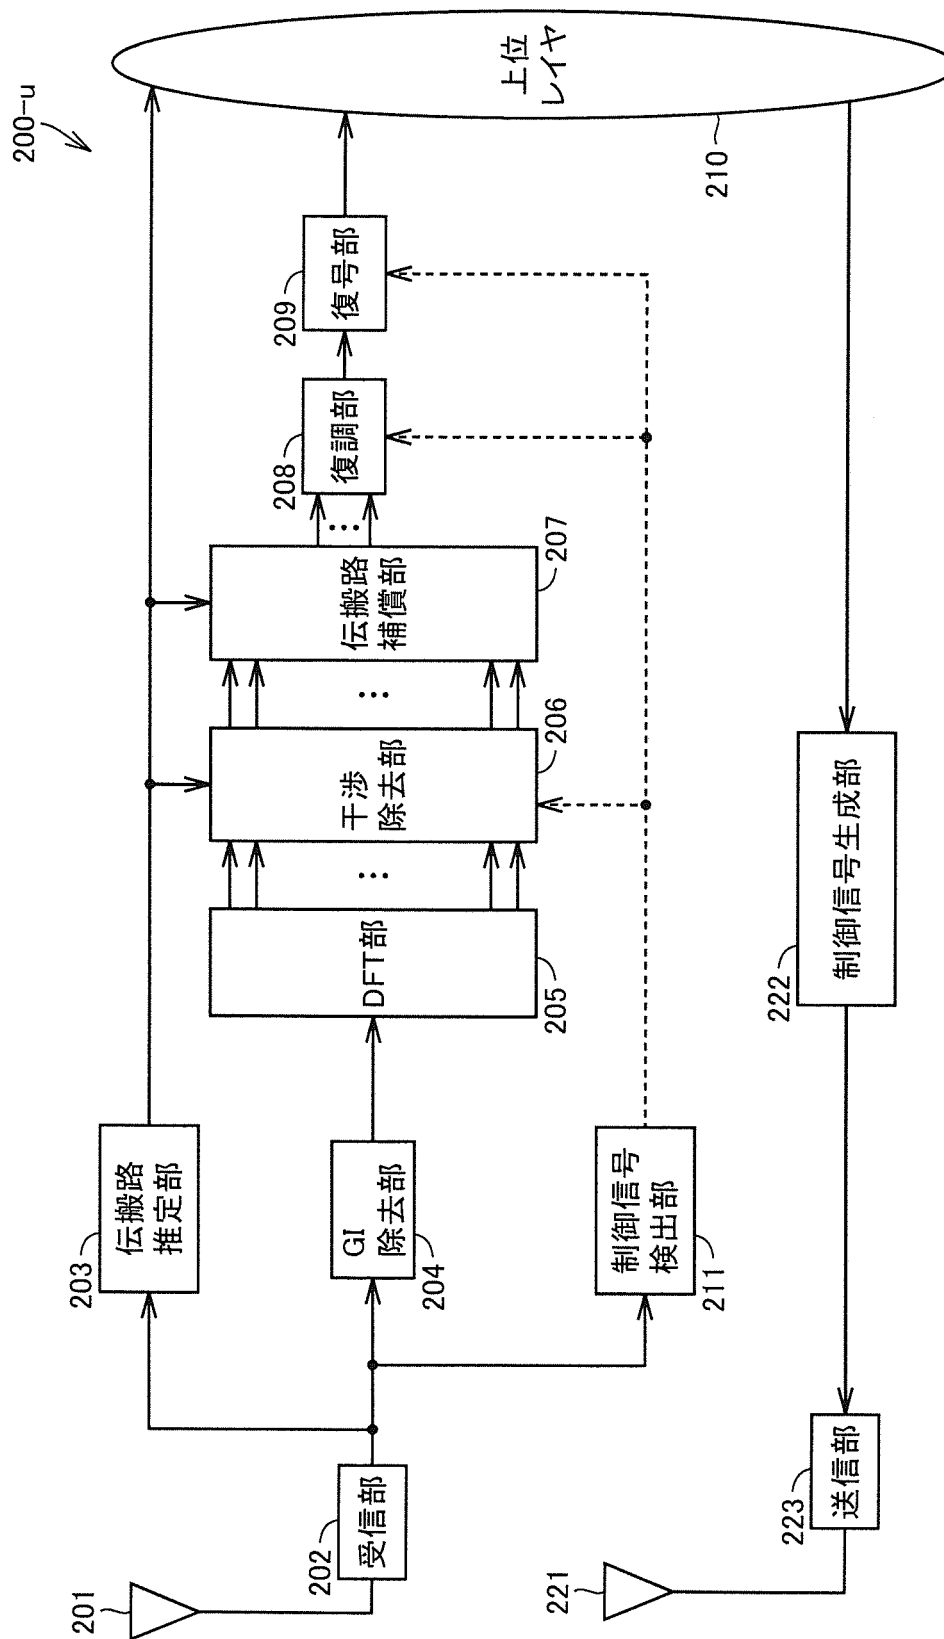


[図10]

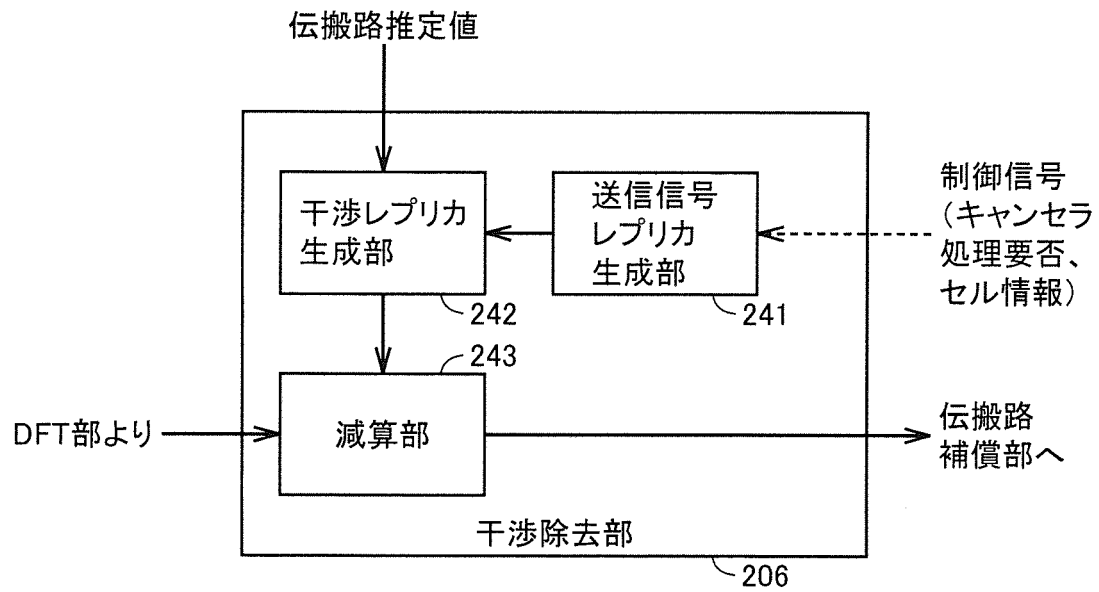

[図11]

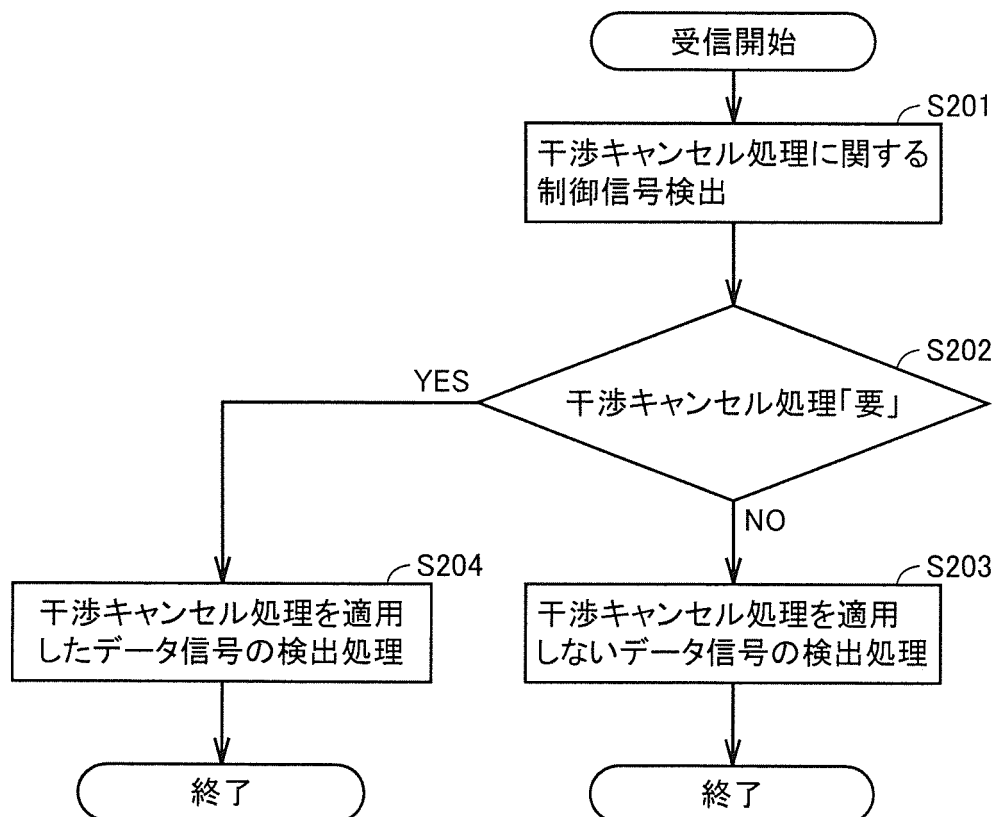

[図13]

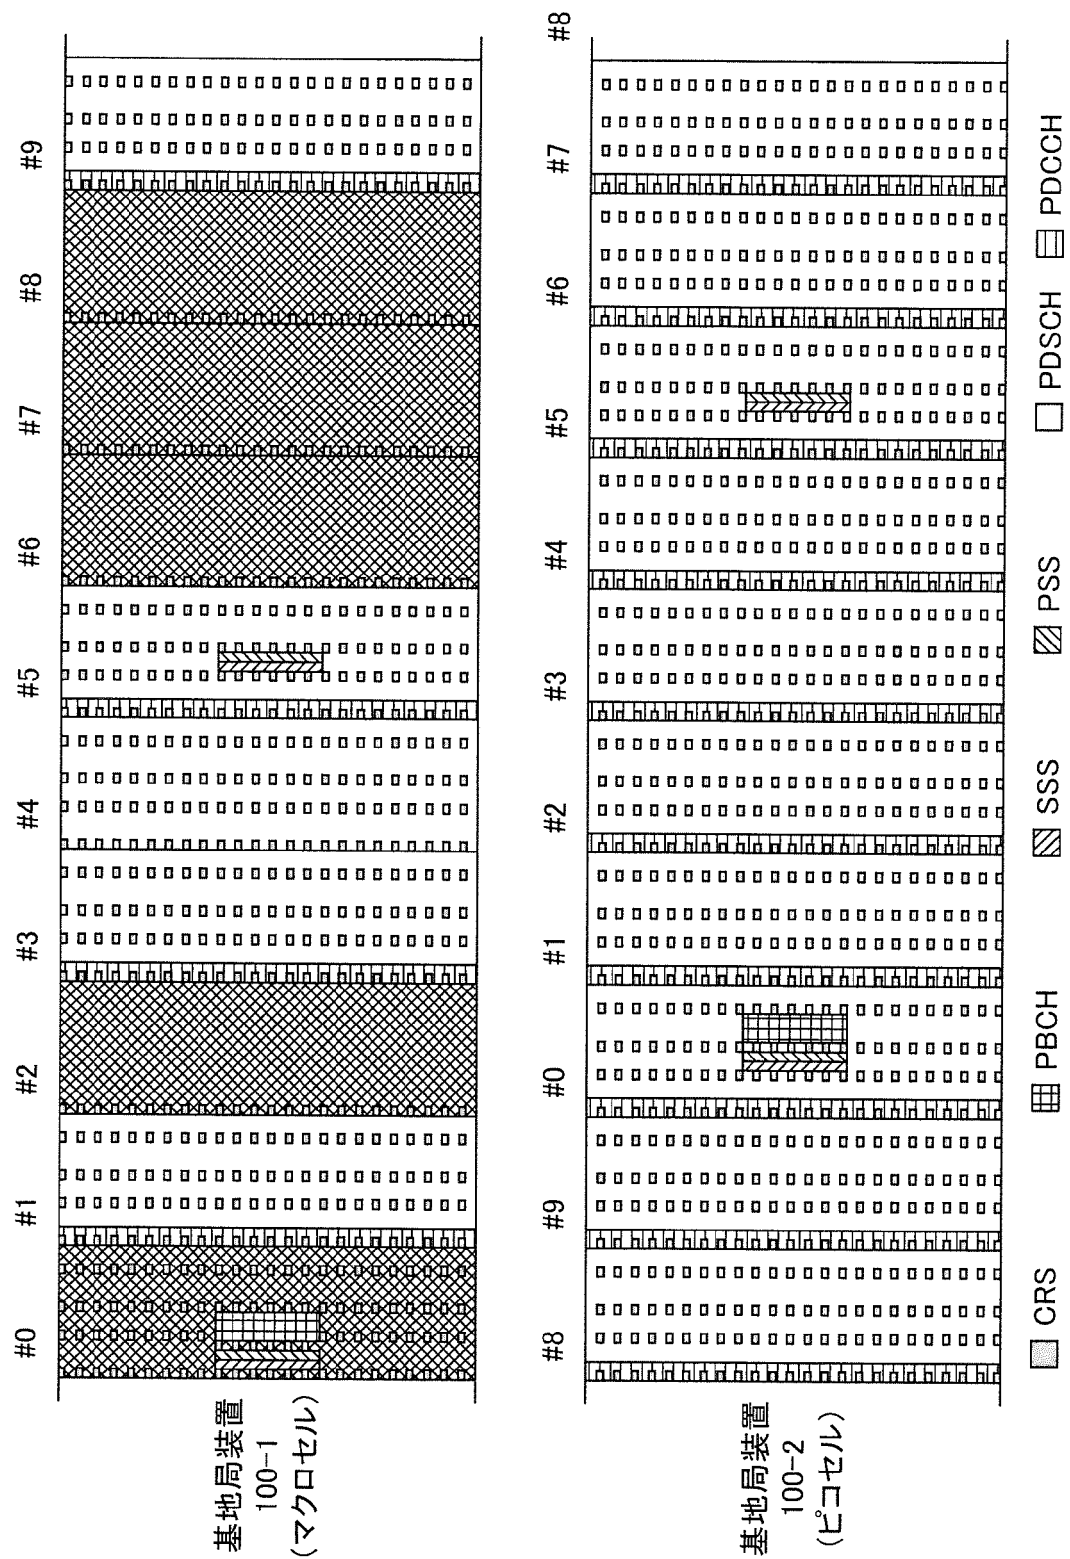

[図14]

キャンセルセル処理するサブフレーム情報										セル情報領域							レイヤ数				...
																					...
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	0	1	2	3
1	1	0	0	0	1	1	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0


[図15]

MCS情報				送信フォーマット 情報	
0	1	2	3	0	1
1	1	0	0	0	1

[図16]

インデックス (Index)	変調方式	符号化率
0	Out of range	
1	QPSK	1/3
2	QPSK	1/2
3	QPSK	3/5
4	QPSK	2/3
5	QPSK	3/4
6	QPSK	7/8
7	16QAM	1/2
8	16QAM	3/5
9	16QAM	2/3
10	64QAM	1/3
11	64QAM	1/2
12	64QAM	3/5
13	64QAM	2/3
14	64QAM	3/4
15	64QAM	7/8


[図17]

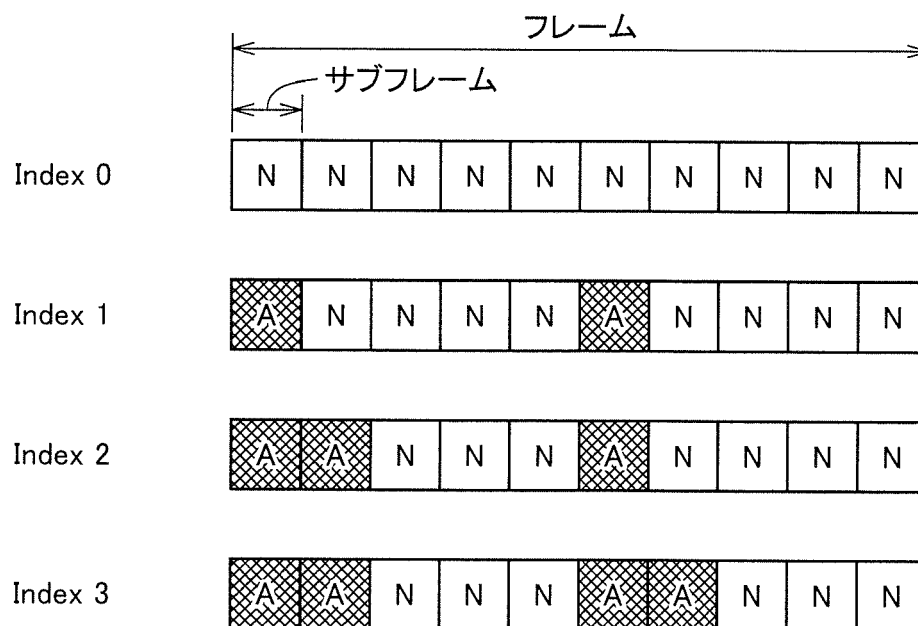


[図18]

送信フォーマット情報	MCS情報	キャンセラ処理の要否
0	-	不要
1~3	0~6	
	7~15	要


[図19]

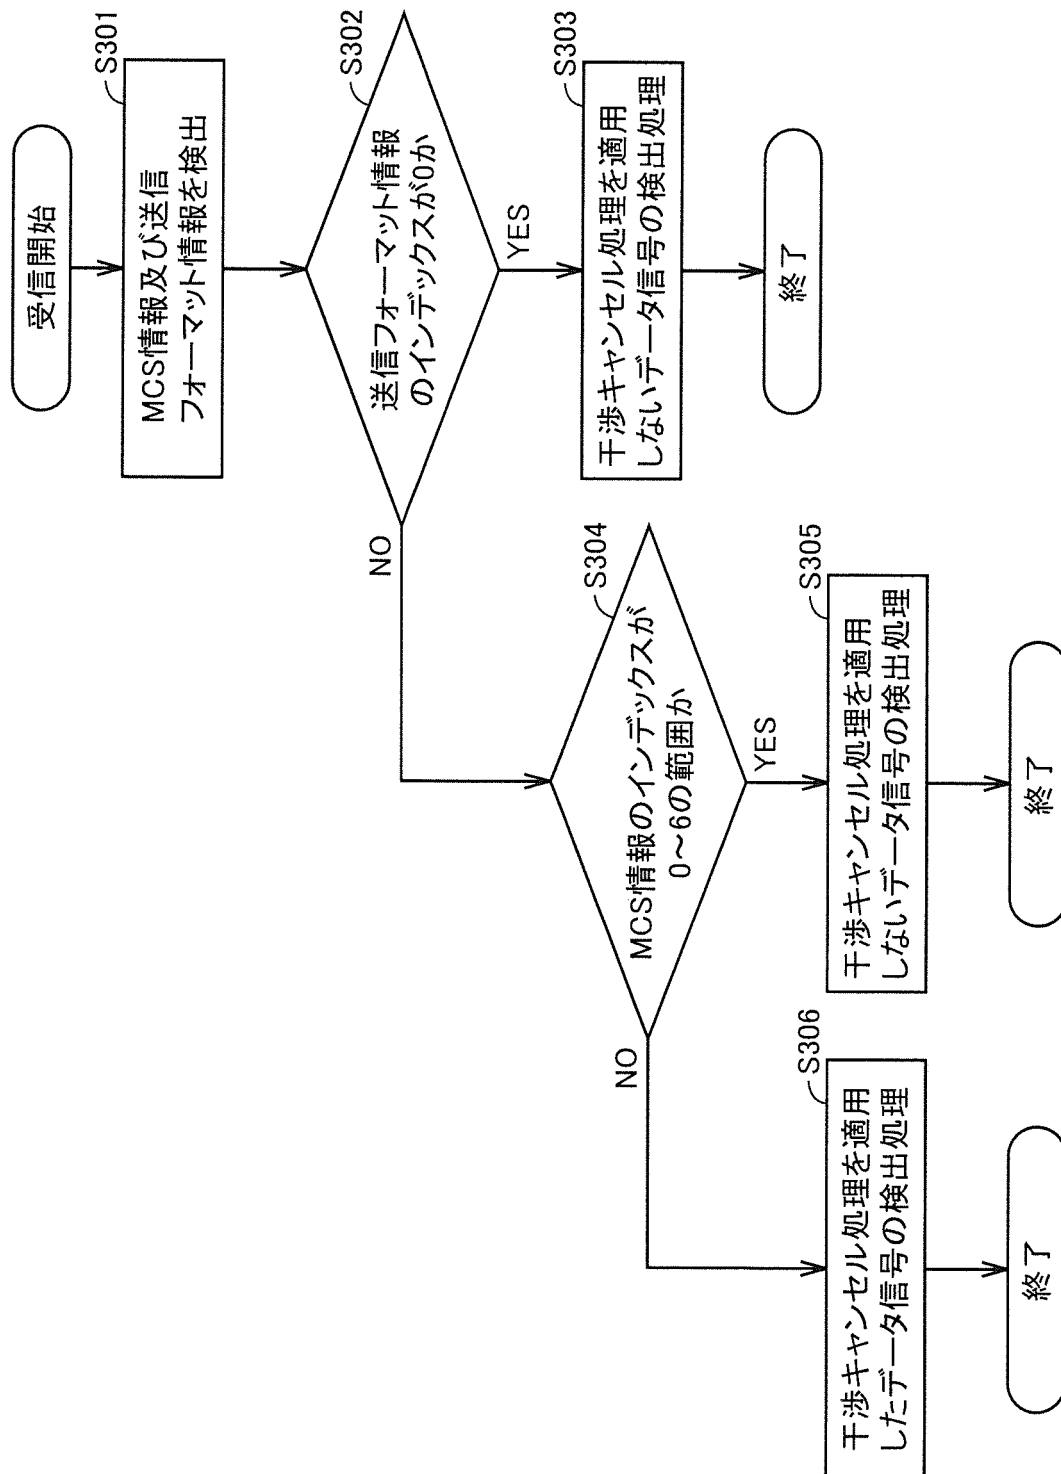

[図20]

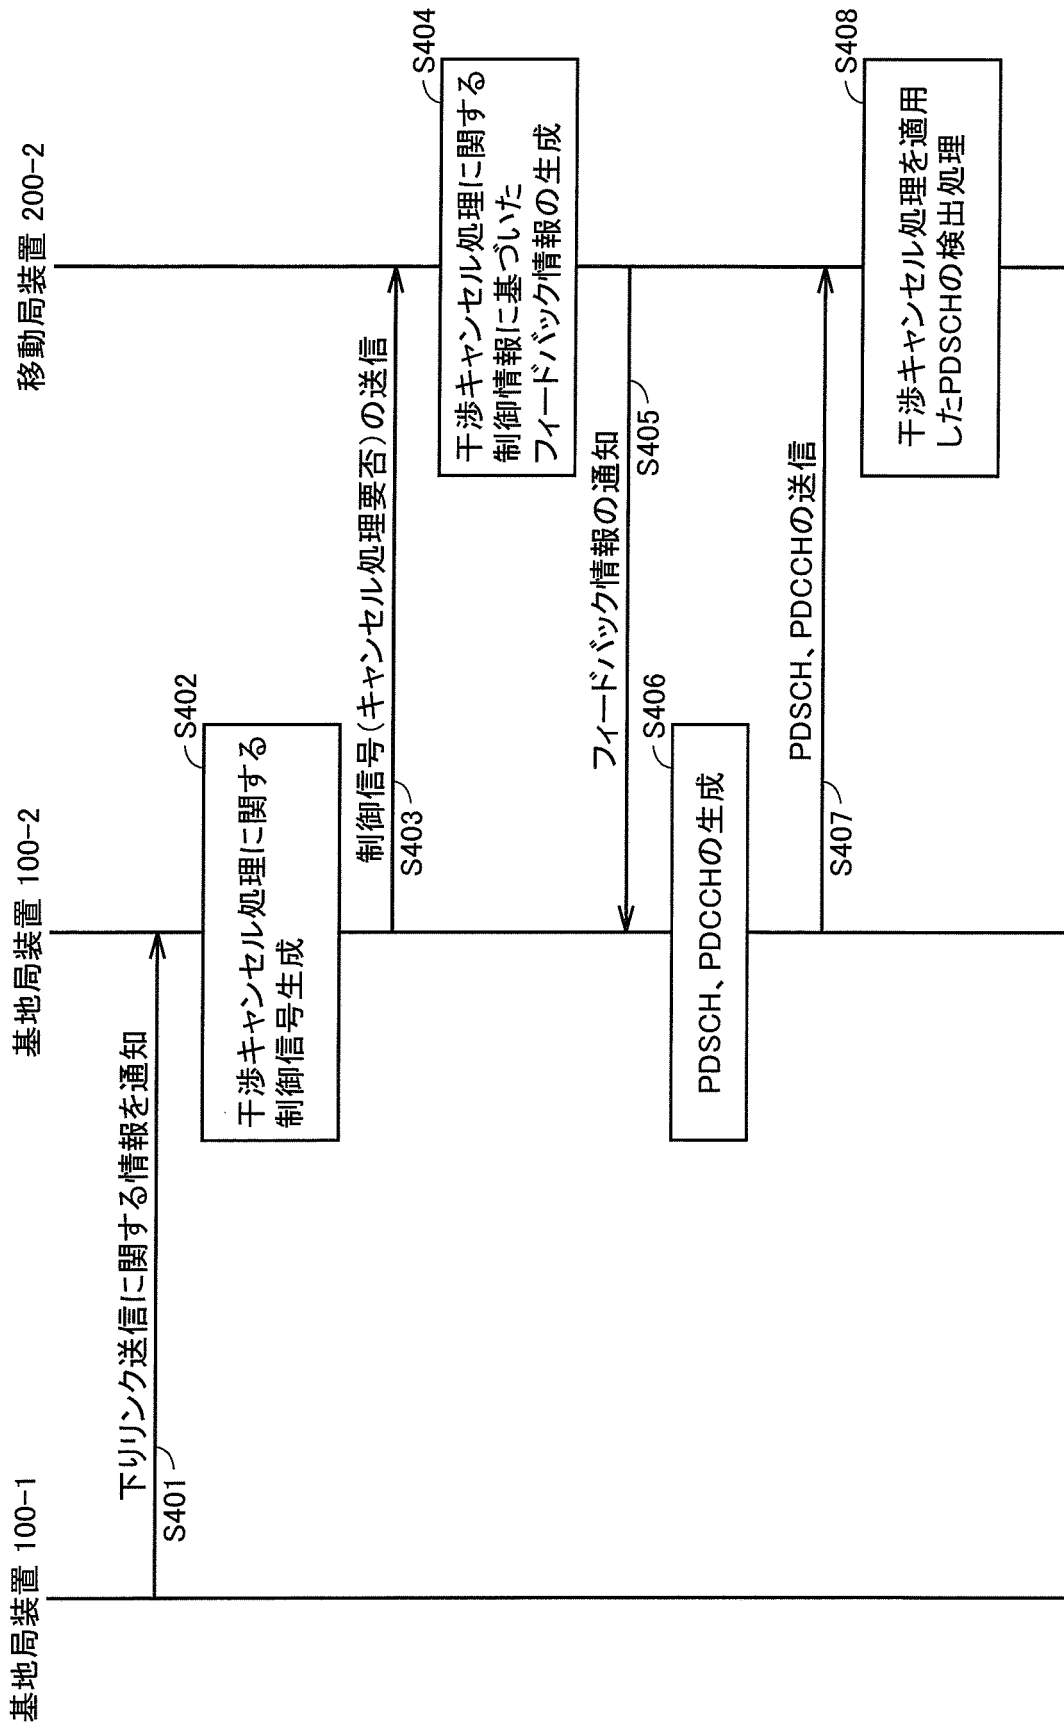

[図21]

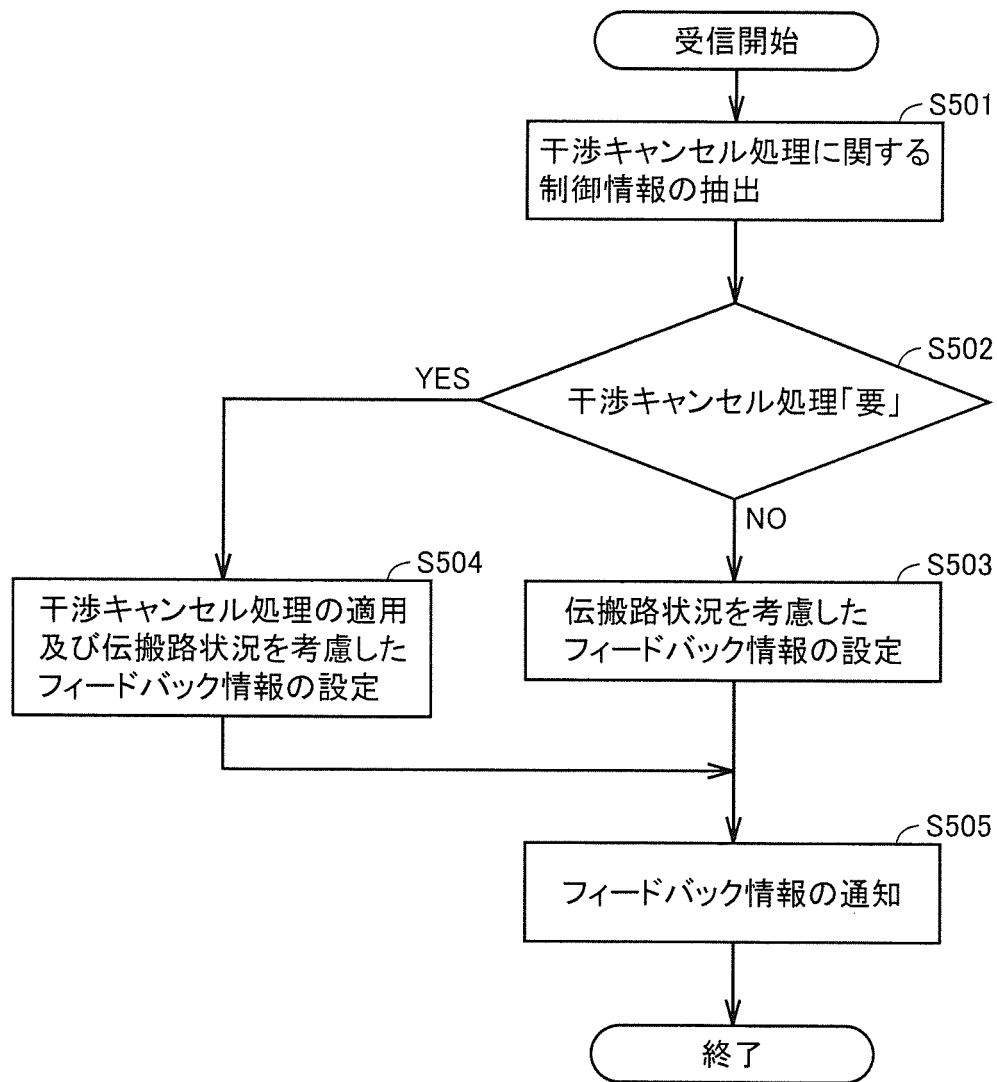

[図22]

