



(51) International Patent Classification:

H04N 7/15 (2006.01) *G09G 5/377* (2006.01)
G09G 5/00 (2006.01) *G09G 5/38* (2006.01)
G09G 5/14 (2006.01) *G09G 5/391* (2006.01)

(21) International Application Number:

PCT/JP2012/060086

(22) International Filing Date:

6 April 2012 (06.04.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2011-100696 28 April 2011 (28.04.2011) JP
 2011-238948 31 October 2011 (31.10.2011) JP

(71) **Applicant** (for all designated States except US): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(72) **Inventor; and**

(75) **Inventor/Applicant** (for US only): **KATO, Yoshinaga** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(74) **Agents:** **ITO, Tadashige** et al.; 16th Floor, Marunouchi MY PLAZA (Meiji Yasuda Seimei Building), 1-1, Marunouchi 2-chome, Chiyoda-ku, Tokyo, 1000005 (JP).

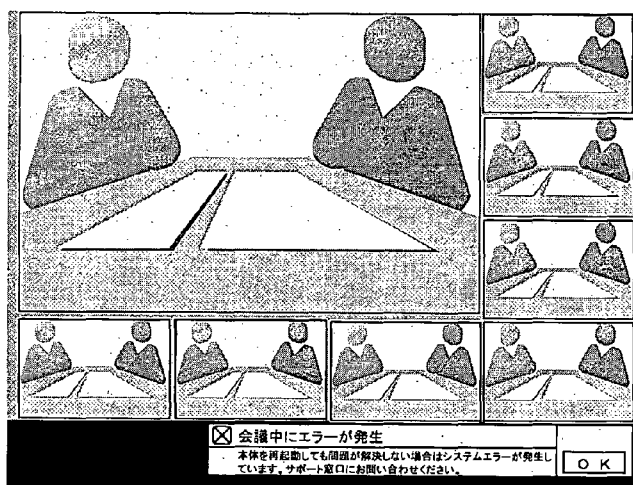
(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** TRANSMISSION TERMINAL, IMAGE DISPLAY CONTROL METHOD, IMAGE DISPLAY CONTROL PROGRAM, RECORDING MEDIUM, AND TRANSMISSION SYSTEM

FIG.34A

(57) **Abstract:** Image data and auxiliary information may be appropriately displayed depending on capabilities of a display connected to a transmission terminal to increase viewability of information necessary for conferencing to ensure displaying of the information. A transmission terminal which is connected to a display apparatus for outputting image data for displaying on the display apparatus is disclosed, including a resolution obtaining unit; a resolution determining unit; a resolution selecting unit; an image processing unit which performs a process of adding a segment area to the image data output by the display apparatus after a first resolution is selected by the resolution selecting unit; and a resolution changing unit which changes the resolution of the display apparatus to the resolution selected by the resolution selecting unit.