



(51) International Patent Classification:

F26B 3/08 (2006.01) F23G 5/04 (2006.01)
F26B 17/10 (2006.01) F23G 5/30 (2006.01)
F26B 23/10 (2006.01)

(21) International Application Number:

PCT/FI2014/050133

(22) International Filing Date:

21 February 2014 (21.02.2014)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data:

20135160 22 February 2013 (22.02.2013) FI

(71) Applicant: ENDEV OY [FI/FI]; Kymijoentie 1, FI-48600
Kotka (FI).

(72) Inventor: RUOTTU, Seppo; Ukonkellonkatu 23, FI-
48800 Kotka (FI).

(74) Agent: PAPULA OY; P.O. Box 981, FI-00101 Helsinki
(FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: CIRCULATING MASS DRYER AND METHOD FOR DRYING WET SLUDGE

(57) Abstract: The invention relates to a circulating mass dryer for drying wet sludge. According to the invention, the circulating mass dryer includes two adjacent circulating mass systems in heat exchange communication with one another, wherein the first circulating mass system is a sludge drying side and the second circulating mass system each comprises at least one elongated riser (3, 16), and the riser (3) of the first circulating mass system and the riser (16) of the second circulating mass system are adjacent in such a way that a common heat exchange surface is formed therebetween. In addition, the invention relates to a corresponding method.

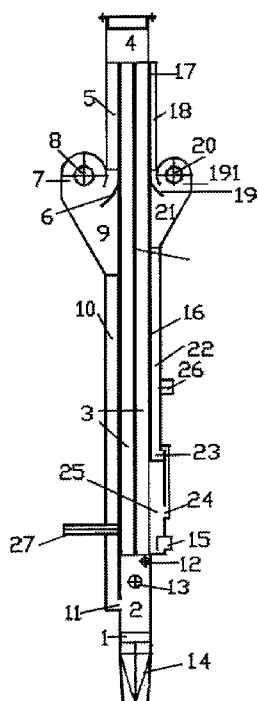


Fig. 1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

Declarations under Rule 4.17:

Published:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

— *with international search report (Art. 21(3))*