

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 March 2003 (06.03.2003)


PCT

(10) International Publication Number
WO 03/018321 A1

- (51) International Patent Classification⁷: **B41J 3/44** (74) Agent: **SILVERBROOK, Kia**; Silverbrook Research Pty Ltd, 393 Darling Street, Balmain, New South Wales 2041 (AU).
- (21) International Application Number: PCT/AU02/01051
- (22) International Filing Date: 6 August 2002 (06.08.2002) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/942,601 31 August 2001 (31.08.2001) US
- (71) Applicant (*for all designated States except US*): **SILVERBROOK RESEARCH PTY. LTD.** [AU/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **SILVERBROOK, Kia** [AU/AU]; Silverbrook Research Pty Ltd, 393 Darling Street, Balmain, New South Wales 2041 (AU).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: IMAGE RECORDAL AND GENERATION APPARATUS

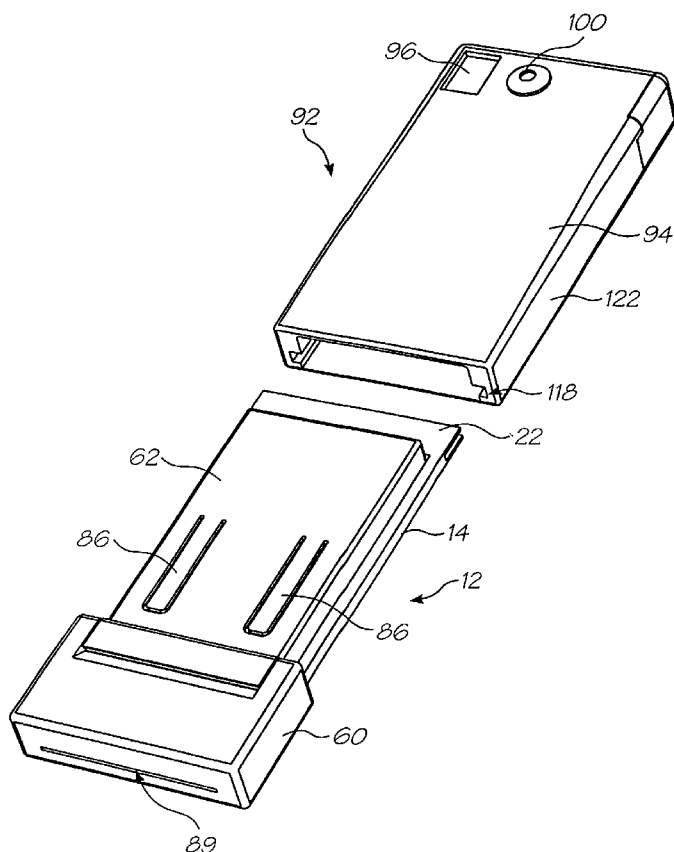

(57) Abstract: An apparatus for recording and generating images includes a printing unit. The printing unit includes a carrier that is dimensioned to approximate a PCMCIA memory card. A media supply is receivable in the carrier. A page width print head assembly is mounted in the carrier to print images on the media. The page width print head assembly includes at least one print head chip and a suitable printing microprocessor that is configured to control operation of the print head chip. An ink supply mechanism is operatively arranged with respect to the print head assembly to supply the print head assembly with ink. A media feed mechanism is positioned in the carrier to feed media to and from the print head chip. The apparatus includes an image recordal apparatus that includes a housing in which the carrier is received. The housing is dimensioned to define a sleeve for the carrier so that at least half the carrier is received in the housing. An image sensing device is positioned on the housing to sense an image to be generated. An image sensing microprocessor is positioned in the housing and is operatively arranged with respect to the image sensing device to control operation of the image sensing device. Both the printing unit and the image recordal apparatus have complementary releasable data connectors so that the image sensing microprocessor can communicate image data to the printing microprocessor of the printing unit.



WO 03/018321 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.