

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 December 2005 (15.12.2005)

PCT

(10) International Publication Number
WO 2005/119471 A2

(51) International Patent Classification⁷: **G06F 13/40**

(21) International Application Number:
PCT/US2005/019026

(22) International Filing Date: 1 June 2005 (01.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/858,129 1 June 2004 (01.06.2004) US

(71) Applicant (for all designated States except US):
**HEWLETT-PACKARD DEVELOPMENT COM-
PANY, L.P.** [US/US]; 20555 SH 245, Houston, TX 77070
(US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ATKINSON, Lee, W.**
[US/CN]; 130 Zheng Da 2nd Street Lane 206, Wenshan
District, Taipei (TW).


(74) Agents: **GRIEBENOW, L., Joy et al.**; Hewlett-Packard
Company, Legal Department, Intellectual Property Admin-
istration, P.O. Box 272400, Fort Collins, CO 80527-2400
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: BUS CONTROLLER

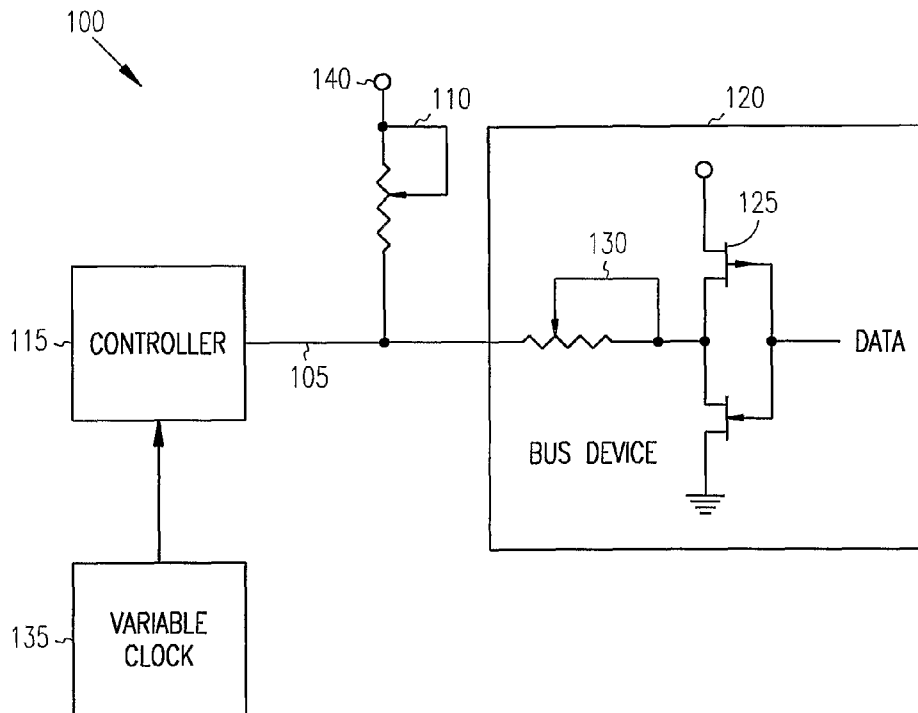

(57) Abstract: A bus has two power consumption modes. A variable bus termination impedance is controlled to provide different bus termination impedances. A controller is coupled to the bus and includes a variable clock having different frequencies that are selectively provided to the controller. The impedance is increased or decreased responsive to the frequency being provided to the controller.

WO 2005/119471 A2



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*