

(43) International Publication Date
27 May 2010 (27.05.2010)(10) International Publication Number
WO 2010/058277 A2(51) International Patent Classification:
F25J 1/02 (2006.01)(21) International Application Number:
PCT/IB2009/007519(22) International Filing Date:
16 November 2009 (16.11.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/272,909 18 November 2008 (18.11.2008) US(71) Applicant (for all designated States except US): **AIR PRODUCTS AND CHEMICALS, INC.** [US/US]; 7201 Hamilton Boulevard, Allentown, PA 18195-1501 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BROSTOW, Adam, Adrian** [US/US]; 126 Colonial Court, Emmaus, PA 18949 (US). **ROBERTS, Mark, Julian** [US/US]; 8866 Canaris Drive, Kempton, PA 19529 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: LIQUEFACTION METHOD AND SYSTEM

Fig. 1

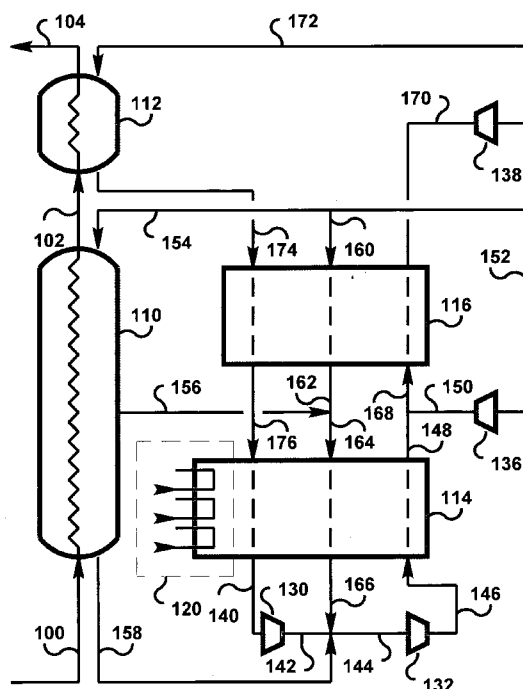

(57) Abstract: A feed gas is liquefied using a closed loop refrigeration system in which a cooled compressed gaseous refrigerant stream (150) is expanded (136) to provide a first expanded gaseous refrigerant stream (154) that is substantially vapor and is used to cool and substantially liquefy a feed gas stream (100) through indirect heat exchange (110). The substantially liquefied feed gas stream (102) preferably is subcooled through indirect heat exchange (112) against a second expanded gaseous refrigerant stream (172) that preferably also is substantially vapor and can be provided by a cooled compressed gaseous refrigerant stream (170) or by a portion of the first expanded gaseous refrigerant stream (152). Cooling duty for the compressed gaseous refrigerant stream (146) is provided by a portion (160) of the first expanded gaseous refrigerant stream (152), gaseous refrigerant (156) partially warmed by said heat exchange (110) against feed gas, and/or second expanded gaseous refrigerant stream (174) warmed by said subcooling (112).