

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 June 2006 (08.06.2006)


PCT

(10) International Publication Number
WO 2006/058854 A1

- (51) International Patent Classification:
H03K 17/94 (2006.01) *G01L 27/00* (2006.01)
G01L 9/00 (2006.01) *G01L 19/08* (2006.01)
- (21) International Application Number:
PCT/EP2005/056155
- (22) International Filing Date:
22 November 2005 (22.11.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
MI2004A002329 3 December 2004 (03.12.2004) IT
- (71) Applicant (for all designated States except US): **ELET-TROTEC s.r.l.** [IT/IT]; Via Jean Jaurés, 12, I-20125 Milano (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SARTOR, Adriana** [IT/IT]; Via Ristori, 8, I-20129 Milano (IT).
- (74) Agent: **MITTLER, Enrico**; c/o Mittler & C. s.r.l., Viale Lombardia, 20, I-20131 Milano (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTRONIC PRESSURE SWITCH WITH POSSIBILITY OF QUICK SET-UP OF THE MAIN OPERATION PARAMETERS

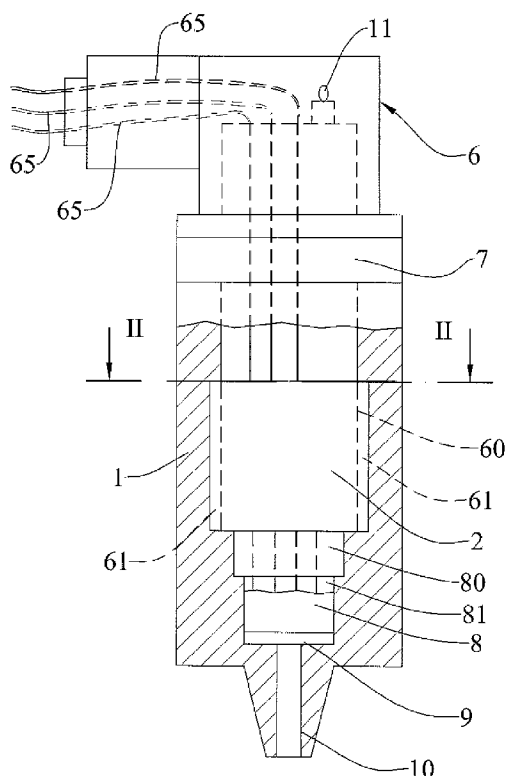

(57) Abstract: An electronic pressure switch is described comprising an external body (1) provided with a cavity (60), a removable head (6) provided with means (7) for the tight closing of said body (1), a pressure sensor (8) exposed to the pressure of the environment under control, a circuit card (2) provided with memory connected with said pressure sensor (8) and set-up means (4) operating on said circuit card (2). Set-up means (4) are housed in said cavity (60) and comprise at least one key (12-13) reachable by the operator by removing said removable head (6).

**Declarations under Rule 4.17:**

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.