

-1-

BIOLUMINESCENT NOVELTY ITEMS**RELATED APPLICATIONS**

For U.S. national stage purposes, this application is a continuation-in-part of U.S. application Serial No. 08/757,046 to Bruce Bryan, filed November 25, 1996, entitled "BIOLUMINESCENT NOVELTY ITEMS". This application is also a continuation-in-part of U.S. application Serial No. 08/597,274 to Bruce Bryan, filed February 6, 1996, entitled "BIOLUMINESCENT NOVELTY ITEMS". U.S. application Serial No. 08/757,046 is a continuation-in-part of 08/597,274. The subject matter of each of U.S. application Serial Nos. 08/757,046 and 08/597,274 is herein incorporated in its entirety by reference thereto.

For international purposes where permitted, priority is claimed to each of U.S. application Serial Nos. 08/757,046 and 08/597,274.

FIELD OF INVENTION

The present invention relates to combinations of systems for producing bioluminescent light and articles of manufacture including toys, textiles, food and beverages. The resulting combinations are novelty items, which, by virtue of the combination, glow or produce or expel a bioluminescent composition. Also, provided are compositions, encapsulated bioluminescence generating reagents, and methods for producing the bioluminescence.

BACKGROUND OF THE INVENTION

Luminescence is a phenomenon in which energy is specifically channeled to a molecule to produce an excited state. Return to a lower energy state is accompanied by release of a photon (hv). Luminescence includes fluorescence, phosphorescence, chemiluminescence and bioluminescence. Bioluminescence is the process by which living organisms emit light that is visible to other organisms. Luminescence may be represented as follows:



where X^* is an electronically excited molecule and hv represents light emission upon return of X^* to a lower energy state. Where the luminescence is bioluminescence, creation of the excited state derives from an enzyme catalyzed reaction. The color of the emitted light in a bioluminescent (or

-2-

chemiluminescent or other luminescent) reaction is characteristic of the excited molecule, and is independent from its source of excitation and temperature.

- An essential condition for bioluminescence is the use of molecular oxygen, either bound or free in the presence of a luciferase. Luciferases, are oxygenases, that act on a substrate, luciferin, in the presence of molecular oxygen and transform the substrate to an excited state. Upon return to a lower energy level, energy is released in the form of light [for reviews see, e.g., McElroy et al. (1966) in *Molecular Architecture in Cell Physiology*, Hayashi et al., eds., Prentice-Hall, Inc., Englewood Cliffs, NJ, pp. 63-80; Ward et al., Chapter 7 in *Chemi-and Bioluminescence*, Burr, ed., Marcel Dekker, Inc. NY, pp.321-358; Hastings, J. W. in (1995) *Cell Physiology:Source Book*, N. Sperelakis (ed.), Academic Press, pp 665-681; *Luminescence, Narcosis and Life in the Deep Sea*, Johnson, Vantage Press, NY, see, esp. pp. 50-56].

- Though rare overall, bioluminescence is more common in marine organisms than in terrestrial organisms. Bioluminescence has developed from as many as thirty evolutionarily distinct origins and, thus, is manifested in a variety of ways so that the biochemical and physiological mechanisms responsible for bioluminescence in different organisms are distinct. Bioluminescent species span many genera and include microscopic organisms, such as bacteria [primarily marine bacteria including *Vibrio* species], fungi, algae and dinoflagellates, to marine organisms, including arthropods, mollusks, echinoderms, and chordates, and terrestrial organism including annelid worms and insects.

- Bioluminescence, as well as other types of chemiluminescence, is used for quantitative determinations of specific substances in biology and medicine. For example, luciferase genes have been cloned and exploited as reporter genes in numerous assays, for many purposes. Since the different luciferase systems have different specific requirements, they may be used to detect and quantify a variety of substances. The majority of commercial bioluminescence applications are based on firefly [*Photinus pyralis*] luciferase. One of the first and still widely used assays involves the use of firefly luciferase to detect the presence of ATP. It is also used to detect and quantify other substrates or co-factors in the

-3-

reaction. Any reaction that produces or utilizes NAD(H), NADP(H) or long chain aldehyde, either directly or indirectly, can be coupled to the light-emitting reaction of bacterial luciferase.

- Another luciferase system that has been used commercially for analytical purposes is the *Aequorin* system. The purified jellyfish photoprotein, aequorin, is used to detect and quantify intracellular Ca^{2+} and its changes under various experimental conditions. The *Aequorin* photoprotein is relatively small [$\sim 20\text{kDa}$], nontoxic, and can be injected into cells in quantities adequate to detect calcium over a large concentration range [3×10^{-7} to 10^{-4} M].
- Because of their analytical utility, many luciferases and substrates have been studied and well-characterized and are commercially available [e.g., firefly luciferase is available from Sigma, St. Louis, MO, and Boehringer Mannheim Biochemicals, Indianapolis, IN; recombinantly produced firefly luciferase and other reagents based on this gene or for use with this protein are available from Promega Corporation, Madison, WI; the aequorin photoprotein luciferase from jellyfish and luciferase from *Renilla* are commercially available from Sealite Sciences, Bogart, GA; coelenterazine, the naturally-occurring substrate for these luciferases, is available from Molecular Probes, Eugene, OR]. These luciferases and related reagents are used as reagents for diagnostics, quality control, environmental testing and other such analyses. These reagents have not been used in connection with entertainment and recreation for the glow, illumination and color produced upon generation of bioluminescence.

- Thus, it is an object herein to exploit bioluminescence for use as a recreational product in combination with articles of manufacture to produce novelty items, including toys, personal items, foods, fountains, beverages, coating compositions, such as paints and inks, textiles, including clothing, toy cigarettes, fish food, particularly for feeding transgenic fish that express a luciferase, jewelry and other such items. It is also an object herein to provide such combinations and to provide means for producing and using such combinations.

-4-

SUMMARY OF THE INVENTION

Systems and apparatus for generating bioluminescence, and combinations of these systems and apparatus with inanimate articles of manufacture to produce novelty items are provided. These novelty items, which are articles of manufacture, are designed for entertainment, recreation and amusement, and include, but are not limited to: toys, particularly squirt guns, toy cigarettes, lanterns, such as those used in the "Little New Year" festival, toy "Halloween" eggs, footbags and board/card games; finger paints and other paints, slimy play material; textiles, particularly clothing, such as shirts, hats and sports gear suits, threads and yarns; bubbles in bubble making toys and other toys that produce bubbles; balloons; figurines; personal items, such as bath powders, body lotions, gels, powders and creams, nail polishes, make-up, toothpastes and other dentifrices, soaps, body paints, and bubble bath; items such as inks, paper; foods, such as gelatins, icings and frostings; fish food containing luciferins and transgenic fish, particularly transgenic fish that express a luciferase; plant food containing a luciferin or luciferase, preferably a luciferin for use with transgenic plants that express luciferase; and beverages, such as beer, wine, champagne, soft drinks, and ice cubes and ice in other configurations; fountains, including liquid "fireworks", portable glowing "lanterns" that drip or spray glowing liquid, and other such jets or sprays or aerosols of compositions that are solutions, mixtures, suspensions, powders, pastes, particles or other suitable form.

Thus, the novelty items provided herein include but are not limited to: textiles that glow, ink that glows, paints, particularly fingerpaints, that glow, paper products that glow, toys, particularly reloadable squirt guns that eject a bioluminescent fluid, dolls and dummies with internal organs or parts that glow, figurines and novelty items that glow; toy "cigarettes" that produce glowing "smoke" upon exhalation, toy eggs with glowing yolks and/or whites, toy footbags that glow and toy board and card games with glowing parts, such as glowing cards, dice, game boards, etc.; foods and beverages that glow, soapy compositions for blowing bubbles that produce bubbles that glow, bubble bath compositions that produce bubbles that glow, fountains that expel glowing

-5-

fluid, bioluminescent "fireworks", sparklers, magic-wand toys, and numerous other such items. Food containing a luciferin for use with plants and animals that express luciferase, such as transgenic fish, then when fed a food containing an appropriate substrate glow, is also contemplated herein.

- 5 Bioluminescence is advantageously used in combination with such novelty items because it can be generated using reagents that are nontoxic, noncorrosive and nonstaining. Bioluminescence is also advantageously used because it can be sustained to provide a glow that lasts, if desired, from minutes up to hours.
- 10 Any article of manufacture that can be combined with a bioluminescence-generating system as provided herein and thereby provide entertainment, recreation and/or amusement, including use of the items for recreation or to attract attention, such as for advertising goods and/or services that are associated with a logo or trademark is contemplated herein. Such uses
- 15 may be in addition to or in conjunction with or in place of the ordinary or normal use of such items. As a result of the combination, the items glow or produce, such as in the case of squirt guns and fountains, a glowing fluid or spray of liquid or particles. The novelty in the novelty item derives from its bioluminescence.
- 20 The preferred bioluminescence-generating reactions are performed by adding oxygen (or water containing oxygen) or calcium ions or other appropriate metal ion to luciferin and luciferase mixtures using apparatus and systems as described herein. Apparatus, systems and substrates for generating the bioluminescence are provided. The systems include matrix materials that are
- 25 coated with bioluminescence generating reagents, capsular vehicles containing the reagents and single chamber and multiple chamber apparatus containing the reagents. The matrix materials are used, for example, in the fabrication of clothing items and also in the loading cartridges described herein.
- Methods and compositions for producing bioluminescence in combination
- 30 with the novelty items are also provided. Micro- and macro-capsular vehicles containing bioluminescence generating reagents are provided. The capsular vehicles are capsules, such as liposomes, isolated endosomes, isolated

-6-

vacuoles, gelatin capsules, and other such delivery vehicles, and the apparatus include vessels, and single chamber, dual chamber and three chamber or more apparatus. These vehicles encapsulate bioluminescence generating system reagents, and typically contain less than all of the reagents necessary to
5 generate a bioluminescent reaction. The capsular vehicles include vehicles often used for drug delivery, such as liposomes, and time release capsules; and also capsules made of glass, plastic and other such materials.

For example, the bioluminescence generating reagents (or components) may be coated on the inside of a glass container, such as a glass capillary tube
10 [see, e.g., U.S. Patent No. 5,387,526]. Upon addition of a composition containing the necessary activating agents, such as molecular oxygen, ATP, a reductase, Ca^{2+} [or other suitable metal ion], the coating will be contacted with the activator and will produce a glow. The capsular vehicles are intended for use in combination with the articles of manufacture.

15 Thus, the micro- or macro-capsular vehicles, when crushed, opened, dissolved or otherwise placed under conditions that cause delivery of the contents, release material that glows upon contact with air and/or moisture and/or other activator(s). These vehicles vary in size [in the largest dimension] from as small as less than $0.1 \mu\text{m}$ up to .1 cm or more.

20 Matrix materials, such as glass, plastics, cotton and other textile material, that contain linked bioluminescence-generating reagents are also provided. For example, one or more components of the bioluminescence generating system is (are) linked by adsorption, absorption or other means, directly or indirectly (such as via a linker) to a matrix material. Matrix materials,
25 such as textiles, glass, plastic or ceramic surfaces or particles adapted for linking molecules, for example such as luciferases or luciferins, are combined with at least one component of the bioluminescence generating system, particularly the luciferin, luciferase, or, where the components are amenable, the luciferin and luciferase. The component(s) such as the luciferase are linked to
30 the matrix, such as cotton, using methods known to those of skill in the art of protein synthesis for linking peptides or proteins to solid substrates [see, e.g., Eichler et al. (1993) Biochemistry 32:11035-11041; Merrifield (1964)

-7-

Biochemistry 3:1385-1390.] Linkage is effected either covalently or non-covalently and can be direct or via linkers. Such methods and linkers are well known to those of skill in the chemical arts. The matrix materials with linked bioluminescence generating system components are contacted with an article of
5 manufacture resulting in a novelty item that, when appropriately treated, such as by spraying on a composition that contains the remaining components of the reactions, glows or produces bioluminescence. The matrix materials are advantageously used in the loading cartridges provided herein.

Also provided are single and multi-chamber, particularly dual chamber,
10 apparatus for producing bioluminescence, and combinations of these apparatus with bioluminescence generating reagents are also provided. Such apparatus include at least one chamber that contains all but at least one reagent or component required to produce bioluminescence. Upon addition of the component either to the chamber or after ejection of some or all of the contents
15 of the chamber a bioluminescent glow or glowing fluid, spray or jet is produced. Recharging or charging cartridges adapted for loading these apparatus are also provided. These apparatus are, for example, adapted for use as toy squirt guns that eject bioluminescent fluid.

The charging, or recharging, cartridges are designed to be used to load
20 components of a bioluminescence generating system into or onto an article of manufacture to produce the novelty items, and also to permit reuse after the bioluminescence generating system is spent. The cartridge, which contains one or more chambers, is in an exemplary embodiment fabricated with two-chambers. In a preferred embodiment, the cartridge includes a matrix material,
25 such as a porous membrane or a cotton ball to which a bioluminescence generating agent, such as a luciferase or luciferin, is adsorbed or absorbed such that when flushed with an appropriate composition will be released from the matrix. The first chamber contains one or more components of a bioluminescence generating system used in the bioluminescent process, and the
30 second chamber contains a composition that will flush or otherwise desorb a quantity of the component from the matrix material. Typically, the composition is contained in an easily puncturable or compressible vial and positioned

-8-

adjacent to the matrix material. In operation, a plunger, a dual pronged plunger where there are two or more chambers, is aligned so that one prong of the plunger is positioned in each chamber, or the plunger may be movably attached to the cartridge, and the output nozzles of the cartridge are aligned against the
5 filler ports of a novelty item, such as a squirt gun. The plunger is then forced into the cartridge, thereby dispensing the components out the nozzle of the first chamber and into the first chamber in the novelty item, and compressing the vial of fluid to flush the remaining components of the bioluminescence
10 generating system from the nozzle of the second chamber and into the second chamber of the novelty item. In this manner, the novelty items contemplated herein may be initially charged, or recharged again and again, by replenishing any or all of the components necessary for generating bioluminescence.

Articles of manufacture containing one or more components of a bioluminescence generating system or a composition, such as a composition
15 containing ATP or Ca^{2+} or other activator, within the packaging material, and a label that indicates that the contents is used for generating bioluminescence are also provided.

Kits containing an article of manufacture and appropriate reagents for generating bioluminescence for use, for example, with, in or on the article of
20 manufacture, are also provided.

DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

FIGURE 1 is a side elevation, with portions cut away, of a squirt gun incorporating the dual chamber structure;

25 FIGURE 2 is a sectional view taken on line 2-2 of FIG. 1;

FIGURE 3 is a sectional view taken on line 3-3 of FIG. 1;

FIGURE 4 is a side elevation view, with portions cut away, of a gas powered toy gun with dual chamber detachable fluid reservoir;

FIGURE 5 is a top plan view of the toy gun of FIG.4, with portions cut
30 away;

FIGURE 6 is a side elevation view, partially cut away of a gas-charged fluid dispensing apparatus incorporating the dual chamber system;

-9-

FIGURE 7 is a sectional view taken on line 7-7 of FIG. 6;

FIGURE 8 is a top plan view of the structure of FIG. 6, partially cut away;

FIGURE 9 is a side elevation view of a fountain type configuration of the gas-charged dual chamber fluid dispensing apparatus, with portions cut away;

FIGURE 10 is a sectional view taken on line 10-10 of FIG. 9;

FIGURE 11 is a side elevation view, partially cut away, of a dual chamber compressible dispensing container;

FIGURE 12 is a side elevation view, partially cut away of a bottle/bladder apparatus designed for use with bubble-blowing compositions;

FIGURE 13 is a view similar to FIG. 12, with the components mixed and the bubble blowing wand detached for use; and

FIGURE 14 is a side elevation view, partially cut away, of beverage container with a bladder apparatus actuated by opening of the beverage container.

FIGURE 15 is a side elevation view, partially cut away of a single use, dual chamber fluid packaging apparatus adapted for use with bubble-blowing compositions.

FIGURE 16 is a side elevation view, partially cut away of a cap apparatus operated by depression of the plunger assembly to rupture the capsule contained within the cork cap.

FIGURE 17 is a side elevation view, partially cut away of a cap apparatus operated by screwing the plunger assembly into the cork cap to rupture the capsule contained therein.

FIGURE 18 is a side elevation view, partially cut away of a cap apparatus operated by screwing the screw-cap onto the top of the bottle forcing the plunger assembly against the capsule contained within the neck of the bottle, thereby rupturing the capsule membranes.

FIGURE 19 is a view similar to the view of FIGURE 18, with the cap apparatus tightly secured against the top of the bottle and the capsule membranes ruptured.

-10-

FIGURE 20 is a side elevation view, with portions cut away, of a spray container or can in which the bottom portion of the apparatus is not engaged.

FIGURE 21 is a side elevation view, with portions cut away, of the spray container in which the bottom portion of the container is engaged.

- 5 FIGURE 22 is a side elevation view of an exemplary pellet that contains bioluminescence-generating reagents and that is adapted for use with the spray container.

FIGURE 23 is a side elevation, with portions cut away, of another embodiment of a squirt gun incorporating the dual chamber structure;

- 10 FIGURE 24 is a top view, with portions cut away, of the nozzle end of the squirt gun of FIG. 23;

FIGURE 25 is a sectional view taken on line 25-25 of FIG. 23; and

FIGURE 26 is a sectional view taken on line 26-26 of FIG. 23.

- 15 FIGURE 27 is a side elevation view of a compressible tube configuration with a portion cut away.

FIGURE 28 is a pictorial view of a charging, or recharging, cartridge;

FIGURE 29 is a sectional view taken on line 29-29 of FIGURE 28, with the plunger in the starting position;

- 20 FIGURE 30 is a sectional view similar to FIGURE 29, showing the cartridge contents ejected into receiving chambers of a typical unit as shown in FIGURE 2;

FIGURE 31 is a sectional view similar to FIGURE 29, showing a plunger locking device;

- 25 FIGURE 32 is a sectional view similar to FIGURE 30, showing the locking device released to allow compression of the plunger;

FIGURE 33 is a sectional view taken along line 33-33 of FIGURE 31 and showing the positioning of the locking device; and

FIGURE 34 is a sectional view of an alternative embodiment dual chamber refill cartridge.

-11-

Figure 35 is an alternative embodiment of a novelty squirt gun.

Figure 36 is a view of the novelty squirt gun of Figure 35, showing the cartridge removed from the cartridge receptacle, and the barrel extended to fill the mixing chamber with bioluminescence generating reagents.

- 5 Figure 37 is a cross-sectional view of the novelty squirt gun of Figure 36, showing the barrel extended and the cartridge removed from the cartridge receptacle.

Figure 38 is a detailed view of the cartridge receptacle of the novelty squirt gun of Figure 37.

- 10 Figure 39 is a cross-sectional view of an alternative embodiment of the nozzle and mixing chamber portion of the novelty squirt gun shown in Figure 35.

- Figure 40 is a cross-sectional view of the alternative embodiment of Figure 40, showing the barrel extended to fill the mixing chamber with
15 bioluminescent fluid.

Figure 41 is a cross-sectional view of the alternative embodiment of Figure 41, showing the barrel being compressed into the gun body to squirt bioluminescence generating reagent-containing composition out the nozzle.

- 20 Figure 42 is a cross-sectional view of an alternative embodiment of the cartridge assembly, showing a cartridge inserted into the cartridge receptacle.

Figure 43 is an end view of the alternative embodiment of Figure 42, showing the plungers and pistons.

- Figure 44 is a cross-sectional view of the alternative embodiment of Figure 42, showing the plunger compressed into the cartridge body to inject the
25 pistons and compositions into the fluid containers:

DETAILED DESCRIPTION OF THE INVENTION

TABLE OF CONTENTS

A. DEFINITIONS

B. Bioluminescence generating systems

-12-

1. General description
 - a. Luciferases
 - b. Luciferins
 - c. Activators
 - d. Reactions
2. Ctenophore and coelenterate systems
 - a. The aequorin system
 - (1) Aequorin photoprotein
 - (2) Luciferin
 - b. The *Renilla* system
3. Crustacean, particular *Cypridina* [*Vargula*], systems
 - a. *Vargula* luciferase
 - (1) Purification from *Cypridina*
 - (2) Preparation by Recombinant Methods
 - b. *Vargula* luciferin
 - c. Reaction
4. Insect bioluminescence generating systems including fireflies, click beetles, and other insect systems
 - a. Luciferase
 - b. Luciferin
 - c. Reaction
5. Bacterial systems
 - a. Luciferases
 - b. Luciferins
 - c. Reactions
6. Other systems
 - a. Dinoflagellate bioluminescence generating systems
 - b. Systems from molluscs, such as *Latia* and *Pholas*
 - c. Earthworms and other annelids
 - d. Glow worms

-13-

- e. Marine polychaete worm systems
 - f. South American railway beetle
 - 7. Fluorescent proteins
 - a. Green and blue fluorescent proteins
 - b. Phycobiliproteins
- 5
- C. Practice of the reactions in combination with articles of manufacture
 - D. Packaging of Bioluminescence Systems
- 1. Dispensing and Packaging Apparatus for Combination with the Bioluminescence Generating System Components
 - 10 2. Capsules, pellets, liposomes, micronized particles
 - a. Encapsulating vehicles-in general
 - b. Encapsulating vehicles -liposomes
 - c. Encapsulating vehicles -gelatin and polymeric vehicles
 - d. Micronized particles
 - 15 3. Apparatus and substrates
 - a. Matrix materials
 - b. Immobilization and activation
 - 4. Apparatus containing a single chamber, housing or a vessel
 - 5. Dual and multiple chamber fluid dispensing apparatus
 - 20
 - a. Mechanical pump dispensing apparatus
 - b. Gas-charged dispensing apparatus
 - c. Compressible dispensing apparatus
 - 6. Other fluid dispensing and packaging apparatus particularly designed for single or multiple uses
 - 25
 - a. Bottle-type single chamber container/bladder apparatus
 - b. Dual chambered bottle type container/bladder apparatus for use with foods and beverages
 - c. Can type container/bladder apparatus for use with foods and beverages
 - 30 d. Spray containers for use to produce a glowing spray
 - 7. Cap Apparatus for use a single chamber vessel

-14-

E. Combinations of articles of manufacture and bioluminescence

1. Personal care products, including bath powders, bubble baths, products for use on the nails, hair, skin, lips and elsewhere
 - a. Bath powders
 - b. Glowing dust or powder
 - c. Lotions, gels and other topical application formulations
 - (1) Lotions
 - (2) Creams
 - (3) Solutions and suspensions for topical application
 - (4) Gels
 - (5) Solids
2. Glowing toys and other items
 - a. Single, dual and multiple chamber toy guns and other toy weapons that shoot pellets or liquid
 - b. Bubble-making toys
 - c. Board/Card games
 - d. Toy Eggs
 - e. Footbags, bean bags and balls
3. Glowing textiles and paper products
4. Foods and beverages, including ice cubes
 - a. Beverages
 - b. Ice
5. Jewelry, Clothing and Other Items of Manufacture
6. Fountains
7. Non-Tobacco Toy Cigarettes
8. Fish and Fish Food
9. Plant Food

F. Cartridges for loading (charging or filling) or reloading (recharging) the novelty items**30 A. Definitions**

Unless defined otherwise, all technical and scientific terms used herein have the same meaning as is commonly understood by one of skill in the art to

-15-

which this invention belongs. All patents and publications of referred to herein are incorporated by reference in their entirety.

As used herein, novelty items refer to inanimate articles of manufacture that are intended to provide, even for only a few moments, amusement, entertainment, decoration or recreation. The use for recreation or entertainment may be the items only use or may be in addition to other uses or benefits of the items, such as clothing that is modified, as described herein, by combination with bioluminescence.

Novelty items are understood by those of skill in manufacture of such items as well as by the purchasing public and are intended herein to include items, such as, toys, including toy guns, such as squirt guns, dolls, dummies, figurines, balloons, bubbles, "fairy dust", such as micronized lyophilized particles, puzzles, and inks and paints, particularly fingerpaints; theatrical vapors when mixed, for example with dry ice or a fog; souvenirs; textiles, particularly clothing, including T-shirts, hats, swimsuits, bathing suit, wet suits, scuba diving suits, surfing suits, and other water sport or sports attire; foods and beverages, including gelatins, ice cubes and ice in other shapes, beer, wine, champagne, soft drinks, ice creams, sorbets, ices, frostings, and candy; jewelry, medallions, decorative articles, artificial flowers, articles for displaying names, business tradenames, slogans, trademarks on promotional or other such items, such as T-shirts, hats, paints, wrapping paper, gifts intended to promote business goodwill; personal items, such as body paints, body sprays, bubble baths, make-up, body lotions, dentifrices; fountains; jets or sprays of particles or fluids, including "fireworks", sparklers, and magic-wand toys, and many other such novelty items [see, e.g., U.S. Patent Nos. 5,435,010, 5,460,022, 5,458,931, 5,435,787, 5,435,010, 5,432,623, 5,421,583, 5,419,558, 5,416,927, 5,413,454, 5,413,332, 5,411,427, 5,410,962, 5,407,691, 5,407,391, 5,405,958, 5,405,206, 5,400,698, 5,399,122, 5,398,972, 5,397,609, 5,396,408, 5,393,580, 5,390,086, 5,389,033, 5,383,684, 5,374,805, 5,368,518, 5,363,984, 5,360,010, 5,353,378, 5,351,931, 5,346,455, 5,341,538, 5,323,492, 5,283,911, 5,222,797, 5,177,812, 5,158,349, 4,924,358, 3,597,877 and many others, which describe types of

-16-

items that are considered novelty items and may be used herein]. Any such inanimate item that is combined with bioluminescence is intended to be encompassed herein.

Thus, for purposes herein, a novelty item refers to any inanimate article
5 of manufacture that, upon combination with bioluminescence, provides amusement, entertainment, recreation or enjoyment, if only for even a few moments. Addition of the bioluminescence system to the article of manufacture does not add to the function of the item, but adds entertainment, amusement or recreational aspects to the item so that the resulting combination is a novelty
10 item. Therefore, combinations provided herein are novelty items by virtue of the combination of an inanimate article of manufacture with bioluminescence. Other combinations provided herein include novelty items, whose entertainment, amusement or recreational use or aspect is changed or improved by the addition of bioluminescence.

15 As used herein, inanimate means that the articles of manufacture are not alive nor formerly living [i.e., dead] items. Thus, the novelty items herein, do not encompass living organisms, such as genetically modified fireflies or genetically engineered plants that express luciferase or other such organisms that produce bioluminescence. Animal food and plant food containing luciferin
20 (or luciferase) and/or other activators for use with a transgenic animal or plant that expresses the corresponding luciferase (or luciferin) are provided. These are intended to result in an illuminated animal or plant upon ingestion or consumption or absorption of the food. Transgenic fish and food therefor are also provided herein.

25 As used herein, personal items include items that are used on the body, such as toothpastes, dentifrices, make-up, nail polishes, body lotions, body creams, body paints and body powders.

As used herein, chemiluminescence refers to a chemical reaction in which energy is specifically channeled to a molecule causing it to become
30 electronically excited and subsequently to release a photon thereby emitting visible light. Temperature does not contribute to this channeled energy. Thus, chemiluminescence involves the direct conversion of chemical energy to light

-17-

energy. Bioluminescence refers to the subset of chemiluminescence reactions that involve luciferins and luciferases (or the photoproteins). Bioluminescence does not herein include phosphorescence.

As used herein, "fairy dust" refers to particles, such as light sensitive
5 liposomes or micronized powdered particles, that glow upon contact with the air, such as "dust" that a child would use when pretending to be Tinker Bell or other such character.

As used herein, reference to ice cubes include ice in any shape or form, including, but not limited to: cubes; ice formations made from precast molds,
10 such as figurines, icicles, ice sculptures and other such novelty items formed from ice.

As used herein, luminescence refers to the detectable EM radiation, generally, UV, IR or visible EM radiation that is produced when the excited product of an exergic chemical process reverts to its ground state with the
15 emission of light. Chemiluminescence is luminescence that results from a chemical reaction. Bioluminescence is chemiluminescence that results from a chemical reaction using biological molecules [or synthetic versions or analogs thereof] as substrates and/or enzymes.

As used herein, bioluminescence, which is a type of chemiluminescence,
20 refers to the emission of light by biological molecules, particularly proteins. The essential condition for bioluminescence is molecular oxygen, either bound or free in the presence of an oxygenase, a luciferase, which acts on a substrate, a luciferin. Bioluminescence is generated by an enzyme or other protein [luciferase] that is an oxygenase that acts on a substrate luciferin [a
25 bioluminescence substrate] in the presence of molecular oxygen and transforms the substrate to an excited state, which upon return to a lower energy level releases the energy in the form of light.

As used herein, the substrates and enzymes for producing bioluminescence are generically referred to as luciferin and luciferase,
30 respectively. When reference is made to a particular species thereof, for clarity, each generic term is used with the name of the organism from which it derives, for example, bacterial luciferin or firefly luciferase.

-18-

As used herein, luciferase refers to oxygenases that catalyze a light emitting reaction. For instance, bacterial luciferases catalyze the oxidation of flavin mononucleotide [FMN] and aliphatic aldehydes, which reaction produces light. Another class of luciferases, found among marine arthropods, catalyzes the oxidation of *Cypridina* [*Vargula*] luciferin, and another class of luciferases catalyzes the oxidation of *Coleoptera* luciferin.

Thus, luciferase refers to an enzyme or photoprotein that catalyzes a bioluminescent reaction [a reaction that produces bioluminescence]. The luciferases, such as firefly and *Renilla* luciferases, that are enzymes which act catalytically and are unchanged during the bioluminescence generating reaction. The luciferase photoproteins, such as the aequorin and obelin photoproteins to which luciferin is non-covalently bound, are changed, such as by release of the luciferin, during bioluminescence generating reaction. The luciferase is a protein that occurs naturally in an organism or a variant or mutant thereof, such as a variant produced by mutagenesis that has one or more properties, such as thermal or pH stability, that differ from the naturally-occurring protein. Luciferases and modified mutant or variant forms thereof are well known.

Thus, reference, for example, to "*Renilla* luciferase" means an enzyme isolated from member of the genus *Renilla* or an equivalent molecule obtained from any other source, such as from another Anthozoa, or that has been prepared synthetically.

The luciferases and luciferin and activators thereof are referred to as bioluminescence generating reagents or components. Typically, a subset of these reagents will be provided or combined with an article of manufacture. Bioluminescence will be produced upon contacting the combination with the remaining reagents. Thus, as used herein, the component luciferases, luciferins, and other factors, such as O_2 , Mg^{2+} , Ca^{2+} are also referred to as bioluminescence generating reagents [or agents or components].

As used herein, "not strictly catalytically" means that the photoprotein acts as a catalyst to promote the oxidation of the substrate, but it is changed in the reaction, since the bound substrate is oxidized and bound molecular oxygen is used in the reaction. Such photoproteins are regenerated by addition of the

-19-

substrate and molecular oxygen under appropriate conditions known to those of skill in this art.

As used herein, bioluminescence substrate refers to the compound that is oxidized in the presence of a luciferase, and any necessary activators, and
5 generates light. These substrates are referred to as luciferins, which are substrates that undergo oxidation in a bioluminescence reaction. These bioluminescence substrates include any luciferin or analog thereof or any synthetic compound with which a luciferase interacts to generate light. Preferred substrates are those that are oxidized in the presence of a luciferase
10 or protein in a light-generating reaction. Bioluminescence substrates, thus, include those compounds that those of skill in the art recognize as luciferins. Luciferins, for example, include firefly luciferin, *Cypridina* [also known as *Vargula*] luciferin [coelenterazine], bacterial luciferin, as well as synthetic analogs of these substrates or other compounds that are oxidized in the
15 presence of a luciferase in a reaction the produces bioluminescence.

As used herein, capable of conversion into a bioluminescence substrate means susceptible to chemical reaction, such as oxidation or reduction, that yields a bioluminescence substrate. For example, the luminescence producing reaction of bioluminescent bacteria involves the reduction of a flavin
20 mononucleotide group (FMN) to reduced flavin mononucleotide (FMNH₂) by a flavin reductase enzyme. The reduced flavin mononucleotide [substrate] then reacts with oxygen [an activator] and bacterial luciferase to form an intermediate peroxy flavin that undergoes further reaction, in the presence of a long-chain aldehyde, to generate light. With respect to this reaction, the
25 reduced flavin and the long chain aldehyde are substrates.

As used herein, bioluminescence system [or bioluminescence generating system] refers to the set of reagents required for a bioluminescence-producing reaction. Thus, the particular luciferase, luciferin and other substrates, solvents and other reagents that may be required to complete a bioluminescent reaction
30 form a bioluminescence system. Therefore, a bioluminescence system (or equivalently a bioluminescence generating system) refers to any set of reagents that, under appropriate reaction conditions, yield bioluminescence. Appropriate

-20-

reaction conditions refers to the conditions necessary for a bioluminescence reaction to occur, such as pH, salt concentrations and temperature. In general, bioluminescence systems include a bioluminescence substrate (a luciferin), a luciferase, which includes enzymes luciferases and photoproteins, and one or more activators. A particular bioluminescence system may be identified by reference to the specific organism from which the luciferase derives; for example, the *Vargula* [also called *Cypridina*] bioluminescence system (or *Vargula* system) includes a *Vargula* luciferase, such as a luciferase isolated from the ostracod, *Vargula* or produced using recombinant means or modifications of these luciferases. This system would also include the particular activators necessary to complete the bioluminescence reaction, such as oxygen and a substrate with which the luciferase reacts in the presence of the oxygen to produce light.

As used herein, recharging or reloading the item refers to the means by which spent bioluminescence generating components are added to an item. Recharging generally refers to a process in which one component, such as a luciferase is added to an item, such as a textile; reloading refers to the process in which all components are added to an item, such as a refillable squirt gun.

As used herein, ATP, AMP, NAD⁺ and NADH refer to adenosine triphosphate, adenosine monophosphate, nicotinamide adenine dinucleotide (oxidized form) and nicotinamide adenine dinucleotide (reduced form), respectively.

As used herein, production by recombinant means by using recombinant DNA methods means the use of the well known methods of molecular biology for expressing proteins encoded by cloned DNA.

As used herein, substantially identical to a product means sufficiently similar so that the property of interest is sufficiently unchanged so that the substantially identical product can be used in place of the product.

As used herein, substantially pure means sufficiently homogeneous to appear free of readily detectable impurities as determined by standard methods of analysis, such as thin layer chromatography (TLC), gel electrophoresis and high performance liquid chromatography (HPLC), used by those of skill in the art

-21-

to assess such purity, or sufficiently pure such that further purification would not detectably alter the physical and chemical properties, such as enzymatic and biological activities, of the substance. Methods for purification of the compounds to produce substantially chemically pure compounds are known to those of skill in the art. A substantially chemically pure compound may, however, be a mixture of stereoisomers. In such instances, further purification might increase the specific activity of the compound.

As used herein equivalent, when referring to two sequences of nucleic acids means that the two sequences in question encode the same sequence of amino acids or equivalent proteins. When "equivalent" is used in referring to two proteins or peptides, it means that the two proteins or peptides have substantially the same amino acid sequence with only conservative amino acid substitutions [see, e.g., Table 2, below] that do not substantially alter the activity or function of the protein or peptide. When "equivalent" refers to a property, the property does not need to be present to the same extent [e.g., two peptides can exhibit different rates of the same type of enzymatic activity], but the activities are preferably substantially the same. "Complementary," when referring to two nucleotide sequences, means that the two sequences of nucleotides are capable of hybridizing, preferably with less than 25%, more preferably with less than 15%, even more preferably with less than 5%, most preferably with no mismatches between opposed nucleotides. Preferably the two molecules will hybridize under conditions of high stringency.

As used herein: stringency of hybridization in determining percentage mismatch is as follows:

- 1) high stringency: 0.1 x SSPE, 0.1% SDS, 65°C
- 2) medium stringency: 0.2 x SSPE, 0.1% SDS, 50°C
- 3) low stringency: 1.0 x SSPE, 0.1% SDS, 50°C

It is understood that equivalent stringencies may be achieved using alternative buffers, salts and temperatures.

The term "substantially" varies with the context as understood by those skilled in the relevant art and generally means at least 70%, preferably means at least 80%, more preferably at least 90%, and most preferably at least 95%.

-22-

As used herein, biological activity refers to the in vivo activities of a compound or physiological responses that result upon administration of a compound, composition or other mixture. Biological activities may be observed in in vitro systems designed to test or use such activities. Thus, for purposes
5 herein the biological activity of a luciferase is its oxygenase activity whereby, upon oxidation of a substrate, light is produced.

As used herein, a composition refers to a any mixture. It may be a solution, a suspension, liquid, powder, a paste, aqueous, non-aqueous or any combination thereof.

10 As used herein, a combination refers to any association between two or among more items.

As used herein, fluid refers to any composition that can flow. Fluids thus encompass compositions that are in the form of semi-solids, pastes, solutions, aqueous mixtures, gels, lotions, creams and other such compositions.

15 As used herein, plant food refers to any liquids, water-soluble or water-insoluble solids, such as fertilizers containing any ratio of nitrogen, potassium and/or phosphorous, formulations, combinations, polymers or plant growth promoters, such as auxins and hormones, that is applied to a plant to promote or maintain growth [e.g., see U.S. Patent Nos. 4,016,880, 4,711,659,
20 4,804,403, 5,547,486, 5,553,853, RE 35,320, and RE 31,801]. The plant food may be applied directly to the soil, sprayed on the foliage of the plant or a combination thereof. The plant food may be slow releasing or available immediately for consumption by the plant. The plant food may be applied to any
25 plant that can be genetically engineered to contain a heterologous gene encoding a component of a bioluminescence generating system, preferably a luciferase. Examples of such plants, but not meant to be limiting to, are grasses, agricultural plants and ornamental plants.

B. Bioluminescence generating systems

30 A bioluminescence generating system refers to the components that are necessary and sufficient to generate bioluminescence. These include a luciferase, luciferin and any necessary co-factors or conditions. Virtually any

-23-

bioluminescence generating system known to those of skill in the art will be amenable to use in the apparatus, systems, combinations and methods provided herein. Factors for consideration in selecting a bioluminescence generating system, include, but are not limited to: the item used in combination with the bioluminescence; the medium in which the reaction is run; stability of the components, such as temperature or pH sensitivity; shelf life of the components; sustainability of the light emission, whether constant or intermittent; availability of components; desired light intensity; and other such factors.

10 1. General description

In general, bioluminescence refers to an energy-yielding chemical reaction in which a specific chemical substrate, a luciferin, undergoes oxidation, catalyzed by an enzyme, a luciferase. Bioluminescent reactions are easily maintained, requiring only replenishment of exhausted luciferin or other substrate or cofactor or other protein, in order to continue or revive the reaction. Bioluminescence generating reactions are well known to those of skill in this art and any such reaction may be adapted for use in combination with articles of manufacture as described herein.

There are numerous organisms and sources of bioluminescence generating systems, and some representative genera and species that exhibit bioluminescence are set forth in the following table [reproduced in part from Hastings in (1995) *Cell Physiology:Source Book*, N. Sperelakis (ed.), Academic Press, pp 665-681]:

TABLE 1
Representative luminous organism

Type of Organism	Representative genera
Bacteria	Photobacterium Vibrio Xenorhabdus
Mushrooms	Panus, Armillaria Pleurotus
Dinoflagellates	Gonyaulax Pyrocystis Noctiluca

-24-

	Type of Organism	Representative genera
	Cnidaria (coelenterates) Jellyfish Hydroid Sea Pansy	Aequorea Obelia Renilla
5	Ctenophores	Mnemiopsis Beroe
	Annelids Earthworms Marine polychaetes Syllid fireworm	Diplocardia Chaetopterus, Phyxotrix Odontosyllis
10	Molluscs Limpet Clam Squid	Latia Pholas Heteroteuthis Heterocarpus
15	Crustacea Ostracod	Vargula (Cypridina)
	Shrimp (euphausids)	Meganyctiphanes Acanthophyra Oplophorus Gnathophausia Sergestes
20	Decapod Copepods	
	Insects Coleopterids (beetles) Firefly Click beetles Railroad worm Diptera (flies)	Photinus, Photuris Pyrophorus Phengodes, Phrixothrix Arachnocampa
25		
	Echinoderms Brittle stars Sea cucumbers	Ophiopsila Laetmogone
30		
	Chordates Tunicates	Pyrosoma

-25-

Type of Organism	Representative genera
Fish	
Cartilaginous	Squalus
Bony	
Ponyfish	Leiognathus
Flashlight fish	Photoblepharon
Angler fish	Cryptopsaras
Midshipman	Porichthys
Lantern fish	Benia
Shiny loosejaw	Aristostomias
Hatchet fish	Agyropelecus
and other fish	Pachystomias
	Malacosteus
Midwater fish	Cyclothone
	Neoscopelus
	Tarletonbeania

Other bioluminescent organisms contemplated for use herein are

- 15 *Gonadostomias*, *Gaussia*, *Halisturia*, Vampire squid, *Glyphus*, Mycotophids (fish), *Vinciguerrria*, *Howella*, *Florenciella*, *Chaudiodus*, *Melanocostus* and Sea Pens.

It is understood that a bioluminescence generating system may be isolated from natural sources, such as those in the above Table, or may be produced synthetically. In addition, for uses herein, the components need only be sufficiently pure so that mixture thereof, under appropriate reaction conditions, produces a glow. Thus it has been found, in some embodiments, a crude extract or merely grinding up the organism may be adequate. Generally, however, substantially pure components are used, but, where necessary, the precise purity can be determined empirically. Also, components may be synthetic components that are not isolated from natural sources. DNA encoding luciferases is available [see, e.g., SEQ ID Nos. 1-13] and has been modified [see, e.g., SEQ ID Nos. 3 and 10-13] and synthetic and alternative substrates have been devised. The DNA listed herein is only representative of the DNA encoding luciferases that is available.

Any bioluminescence generating system, whether synthetic or isolated from natural sources, such as those set forth in Table 1, elsewhere herein or

-26-

known to those of skill in the art, is intended for use in the combinations, systems and methods provided herein. Chemiluminescence systems per se, which do not rely on oxygenases [luciferases] are not encompassed herein.

a. Luciferases

5 Luciferases refer to any compound that, in the presence of any necessary activators, catalyze the oxidation of a bioluminescence substrate [luciferin] in the presence of molecular oxygen, whether free or bound, from a lower energy state to a higher energy state such that the substrate, upon return to the lower energy state, emits light. For purposes herein, luciferase is broadly
10 used to encompass enzymes that act catalytically to generate light by oxidation of a substrate and also photoproteins, such as aequorin, that act, though not strictly catalytically [since such proteins are exhausted in the reaction], in conjunction with a substrate in the presence of oxygen to generate light. These luciferases, including photoproteins, such as aequorin, are herein also included
15 among the luciferases. These reagents include the naturally-occurring luciferases [including photoproteins], proteins produced by recombinant DNA, and mutated or modified variants thereof that retain the ability to generate light in the presence of an appropriate substrate, co-factors and activators or any other such protein that acts as a catalyst to oxidize a substrate, whereby light is
20 produced.

 Generically, the protein that catalyzes or initiates the bioluminescent reaction is referred to as a luciferase, and the oxidizable substrate is referred to as a luciferin. The oxidized reaction product is termed oxyluciferin, and certain luciferin precursors are termed etioluciferin. Thus, for purposes herein
25 bioluminescence encompasses light produced by reactions that are catalyzed by [in the case of luciferases that act enzymatically] or initiated by [in the case of the photoproteins, such as aequorin, that are not regenerated in the reaction] a biological protein or analog, derivative or mutant thereof.

 For clarity herein, these catalytic proteins are referred to as luciferases
30 and include enzymes such as the luciferases that catalyze the oxidation of luciferin, emitting light and releasing oxyluciferin. Also included among luciferases are photoproteins, which catalyze the oxidation of luciferin to emit

-27-

light but are changed in the reaction and must be reconstituted to be used again. The luciferases may be naturally occurring or may be modified, such as by genetic engineering to improve or alter certain properties. As long as the resulting molecule retains the ability to catalyze the bioluminescent reaction, it is encompassed herein.

Any protein that has luciferase activity (a protein that catalyzes oxidation of a substrate in the presence of molecular oxygen to produce light as defined herein) may be used herein. The preferred luciferases are those that are described herein or that have minor sequence variations. Such minor sequence variations include, but are not limited to, minor allelic or species variations and insertions or deletions of residues, particularly cysteine residues. Suitable conservative substitutions of amino acids are known to those of skill in this art and may be made generally without altering the biological activity of the resulting molecule. Those of skill in this art recognize that, in general, single amino acid substitutions in non-essential regions of a polypeptide do not substantially alter biological activity (see, e.g., Watson *et al.*, *Molecular Biology of the Gene*, 4th Edition, 1987, The Benjamin/Cummings Pub. co., p.224). Such substitutions are preferably made in accordance with those set forth in TABLE 2 as follows:

TABLE 2

Original residue	Conservative substitution
Ala (A)	Gly; Ser
Arg (R)	Lys
Asn (N)	Gln; His
Cys (C)	Ser; neutral amino acid
Gln (Q)	Asn
Glu (E)	Asp
Gly (G)	Ala; Pro
His (H)	Asn; Gln
Ile (I)	Leu; Val
Leu (L)	Ile; Val
Lys (K)	Arg; Gln; Glu
Met (M)	Leu; Tyr; Ile
Phe (F)	Met; Leu; Tyr
Ser (S)	Thr
Thr (T)	Ser
Trp (W)	Tyr
Tyr (Y)	Trp; Phe
Val (V)	Ile; Leu

-28-

Other substitutions are also permissible and may be determined empirically or in accord with known conservative substitutions. Any such modification of the polypeptide may be effected by any means known to those of skill in this art.

- 5 The luciferases may be obtained commercially, isolated from natural sources, expressed in host cells using DNA encoding the luciferase, or obtained in any manner known to those of skill in the art. For purposes herein, crude extracts obtained by grinding up selected source organisms may suffice. Since large quantities of the luciferase may be desired, isolation of the luciferase from
- 10 host cells is preferred. DNA for such purposes is widely available as are modified forms thereof.

- Examples of luciferases include, but are not limited to, those isolated from the ctenophores *Mnemiopsis* (mnemiopsin) and *Beroë ovata* (berovin), those isolated from the coelenterates *Aequorea* (aequorin), *Obelia* (obelin),
- 15 *Pelagia*, the *Renilla* luciferase, the luciferases isolated from the mollusca *Pholas* (pholasin), the luciferases isolated from the *Aristostomias* and *Porichthys* fish and from the ostracods, such as *Cypridina* (also referred to as *Vargula*). Preferred luciferases for use herein are the Aequorin protein, *Renilla* luciferase and *Cypridina* [also called *Vargula*] luciferase [see, e.g., SEQ ID Nos. 1, 2, and
- 20 4-13]. Also, preferred are luciferases which react to produce red and/or near infrared light. These include luciferases found in species of *Aristostomias*, such as *A. scintillans*, *Pachystomias*, *Malacosteus*, such as *M. niger*.

b. Luciferins

- The substrates for the reaction include any molecule(s) with which the
- 25 luciferase reacts to produce light. Such molecules include the naturally-occurring substrates, modified forms thereof, and synthetic substrates [see, e.g., U.S. Patent Nos. 5,374,534 and 5,098,828]. Exemplary luciferins include those described herein, as well as derivatives thereof, analogs thereof, synthetic substrates, such as dioxetanes [see, e.g., U.S. Patent Nos. 5,004,565
- 30 and 5,455,357], and other compounds that are oxidized by a luciferase in a light-producing reaction [see, e.g., U.S. Patent Nos. 5,374,534, 5,098,828 and

-29-

4,950,588]. Such substrates also may be identified empirically by selecting compounds that are oxidized in bioluminescent reactions.

c. Activators

The bioluminescence generating systems also require additional components discussed herein and known to those of skill in the art. All bioluminescent reactions require molecular oxygen in the form of dissolved or bound oxygen. Thus, molecular oxygen, dissolved in water or in air or bound to a photoprotein, is the activator for bioluminescence reactions. Depending upon the form of the components, other activators include, but are not limited to, ATP [for firefly luciferase], flavin reductase [bacterial systems] for regenerating FMNH₂ from FMN, and Ca²⁺ or other suitable metal ion [aequorin].

Most of the systems provided herein will generate light when the luciferase and luciferin are mixed and exposed to air or water. The systems that use photoproteins that have bound oxygen, such as aequorin, however, will require exposure to Ca²⁺ [or other suitable metal ion], which can be provided in the form of an aqueous composition of a calcium salt. In these instances, addition of a Ca²⁺ [or other suitable metal ion] to a mixture of luciferase [aequorin] and luciferin [such as coelenterazine] will result in generation of light. The *Renilla* system and other Anthozoa systems also require Ca²⁺ [or other suitable metal ion].

If crude preparations are used, such as ground up *Cypridina* [shrimp] or ground fireflies, it may be necessary to add only water. In instances in which fireflies [or a firefly or beetle luciferase] are used the reaction may only require addition ATP. The precise components will be apparent, in light of the disclosure herein, to those of skill in this art or may be readily determined empirically.

It is also understood that these mixtures will also contain any additional salts or buffers or ions that are necessary for each reaction to proceed. Since these reactions are well-characterized, those of skill in the art will be able to determine precise proportions and requisite components. Selection of components will depend upon the apparatus, article of manufacture and

-30-

luciferase. Various embodiments are described and exemplified herein; in view of such description, other embodiments will be apparent.

d. Reactions

In all embodiments, up to all but one component of a bioluminescence
5 generating system will be mixed with or packaged with or otherwise combined with a selected article of manufacture to produce the novelty item. When bioluminescence is desired, the remaining component(s) will be added and light will be produced.

In general, since the result to be achieved is the production of light
10 visible to the naked eye for entertainment, amusement or recreation, for the purposes herein, the precise proportions and amounts of components of the bioluminescence reaction need not be stringently determined or met. They must be sufficient to produce light. Generally, an amount of luciferin and luciferase sufficient to generate a visible glow is used; this amount can be readily
15 determined empirically and is dependent upon the selected system and selected application.

For purposes herein, such amount is preferably at least the concentrations and proportions used for analytical purposes by those of skill in the such arts. Higher concentrations may be used if the glow is not sufficiently
20 bright. Also because the conditions in which the reactions are used are not laboratory conditions and the components are subject to storage, higher concentration may be used to overcome any loss of activity. Typically, the amounts are 1 mg, preferably 10 mg and more preferably 100 mg, of a luciferase per liter of reaction mixture or 1 mg, preferably 10 mg, more
25 preferably 100 mg, coated on a portion of a T-shirt or other textile or paper. Such coating may be produced by drying a composition containing at least about 0.01 mg/l, and typically 0.1 mg/l, 1 mg/l, 10 mg/l or more of each component on the item. The amount of luciferin is also between about 0.01 and 100 mg/l, preferably between 0.1 and 10 mg/l, additional luciferin can be
30 added to many of the reactions to continue the reaction. In embodiments in which the luciferase acts catalytically and does not need to be regenerated, lower amounts of luciferase can be used. In those in which it is changed during

-31-

the reaction, it also can be replenished; typically higher concentrations will be selected. Ranges of concentration per liter [or the amount of coating on substrate the results from contacting with such composition] of each component on the order of 0.1 to 20 mg, preferably 0.1 to 10 mg, more preferably between about 1 and 10 mg of each component will be sufficient. When preparing coated substrates, as described herein, greater amounts of coating compositions containing higher concentrations of the luciferase or luciferin may be used.

Thus, for example, in presence of calcium, 5 mg of luciferin, such as coelenterazine, in one liter of water will glow brightly for at least about 10 to 20 minutes, depending on the temperature of the water, when about 10 mgs of luciferase, such as aequorin photoprotein luciferase or luciferase from *Renilla*, is added thereto. Increasing the concentration of luciferase, for example, to 100 mg/l, provides a particularly brilliant display of light.

If desired, the onset of the bioluminescent reaction can be delayed by adding an, an inhibitor, for example magnesium, of the bioluminescence generating reaction. Also, where inhibition is not desired, the concentration of free magnesium may be reduced by addition of a sufficient amount of chelating agent, such as ethylenediaminetetraacetic acid [EDTA]. The amount of EDTA and also calcium can be empirically determined to appropriately chelate magnesium, without inhibiting or preventing the desired bioluminescence.

It is understood, that concentrations and amounts to be used depend upon the selected article of manufacture and they may be readily determined empirically. Proportions, particularly those used when commencing an empirical determination, are generally those used for analytical purposes, and amounts or concentrations are at least those used for analytical purposes, but the amounts can be increased, particularly if a sustained and brighter glow is desired.

2. Ctenophore and coelenterate systems

Ctenophores, such as *Mnemiopsis* (mnemiopsin) and *Beroe ovata* (berovin), and coelenterates, such as *Aequorea* (aequorin), *Obelia* (obelin) and *Pelagia*, produce bioluminescent light using similar chemistries [see, e.g., Stephenson *et al.* (1981) *Biochimica et Biophysica Acta* 678:65-75; Hart *et al.*

-32-

(1979) Biochemistry 18:2204-2210; International PCT Application No. WO94/18342, which is based on U.S. application Serial No. 08/017,116, U.S. Patent No. 5,486,455 and other references and patents cited herein]. The *Aequorin* and *Renilla* systems are representative and are described in detail
5 herein as exemplary and as among the presently preferred systems. The *Aequorin* and *Renilla* systems can use the same luciferin and produce light using the same chemistry, but each luciferase is different. The *Aequorin* luciferase aequorin, as well as, for example, the luciferases mnemiopsin and berovin, is a photoprotein that includes bound oxygen and bound luciferin, requires Ca^{2+} [or
10 other suitable metal ion] to trigger the reaction, and must be regenerated for repeated use; whereas, the *Renilla* luciferase acts as a true enzyme because it is unchanged during the reaction and it requires dissolved molecular oxygen.

a. The aequorin system

The aequorin system is well known [see, e.g., Tsuji *et al.* (1986)
15 "Site-specific mutagenesis of the calcium-binding photoprotein aequorin," Proc. Natl. Acad. Sci. USA 83:8107-8111; Prasher *et al.* (1985) "Cloning and Expression of the cDNA Coding for Aequorin, a Bioluminescent Calcium-Binding Protein," Biochemical and Biophysical Research Communications 126:1259-1268; Prasher *et al.* (1986) Methods in Enzymology 133:288-297;
20 Prasher, *et al.* (1987) "Sequence Comparisons of cDNAs Encoding for Aequorin Isotypes," Biochemistry 26:1326-1332; Charbonneau *et al.* (1985) "Amino Acid Sequence of the Calcium-Dependent Photoprotein Aequorin," Biochemistry 24:6762-6771; Shimomura *et al.* (1981) "Resistivity to denaturation of the apoprotein of aequorin and reconstitution of the
25 luminescent photoprotein from the partially denatured apoprotein," Biochem. J. 199:825-828; Inouye *et al.* (1989) J. Biochem. 105:473-477; Inouye *et al.* (1986) "Expression of Apoequorin Complementary DNA in *Escherichia coli*," Biochemistry 25:8425-8429; Inouye *et al.* (1985) "Cloning and sequence analysis of cDNA for the luminescent protein aequorin," Proc. Natl. Acad. Sci. USA 82:3154-3158; Prendergast, *et al.* (1978) "Chemical and Physical Properties of Aequorin and the Green Fluorescent Protein Isolated from *Aequorea forskalea*" J. Am. Chem. Soc. 100:3448-3453; European Patent

-33-

Application O 540 064 A1; European Patent Application O 226 979 A2, European Patent Application O 245 093 A1 and European Patent Specification O 245 093 B1; U.S. Patent No. 5,093,240; U.S. Patent No. 5,360,728; U.S. Patent No. 5,139,937; U.S. Patent No. 5,422,266; U.S. Patent No. 5,023,181; 5 U.S. Patent No. 5,162,227; and SEQ ID Nos. 5-13, which set forth DNA encoding the apoprotein; and a form, described in U.S. Patent No. 5,162,227, European Patent Application O 540 064 A1 and Sealite Sciences Technical Report No. 3 (1994), is commercially available from Sealite, Sciences, Bogart, GA as AQUALITE[®]].

10 This system is among the preferred systems for use herein. As will be evident, since the aequorin photoprotein includes noncovalently bound luciferin and molecular oxygen, it is suitable for storage in this form as a lyophilized powder or encapsulated into a selected delivery vehicle. The system can be encapsulated into pellets, such as liposomes or other delivery vehicles, or stored 15 in single chamber dual or other multiple chamber apparatus. When used, the vehicles are contacted with a composition, even tap water, that contains Ca^{2+} [or other suitable metal ion], to produce a mixture that glows. This system is preferred for use in numerous embodiments herein, such as in any embodiment that uses pellets. These embodiments include, squirt guns, fairy dust, bubble 20 toys, bubble baths, soaps, linked to textiles, for addition to beverages and foods.

(1) Aequorin and related photoproteins

The photoprotein, aequorin, isolated from the jellyfish, *Aequorea*, emits light upon the addition of Ca^{2+} [or other suitable metal ion]. The aequorin 25 photoprotein, which includes bound luciferin and bound oxygen that is released by Ca^{2+} , does not require dissolved oxygen. Luminescence is triggered by calcium, which releases oxygen and the luciferin substrate producing apoaequeorin.

The bioluminescence photoprotein aequorin is isolated from a number of 30 species of the jellyfish *Aequorea*. It is a 22 kilodalton [kD] molecular weight peptide complex [see, e.g., Shimomura *et al.* (1962) *J. Cellular and Comp. Physiol.* 59:233-238; Shimomura *et al.* (1969) *Biochemistry* 8:3991-3997;

-34-

Kohama et al. (1971) Biochemistry 10:4149-4152; and Shimomura et al. (1972) Biochemistry 11:1602-1608]. The native protein contains oxygen and a heterocyclic compound coelenterazine, a luciferin, [see, below] noncovalently bound thereto. The protein contains three calcium binding sites. Upon addition
5 of trace amounts Ca^{2+} [or other suitable metal ion, such as strontium] to the photoprotein, it undergoes a conformational change the catalyzes the oxidation of the bound coelenterazine using the protein-bound oxygen. Energy from this oxidation is released as a flash of blue light, centered at 469 nm. Concentrations of calcium ions as low as 10^{-6} M are sufficient to trigger the
10 oxidation reaction.

Naturally-occurring apoaequorin is not a single compound but rather is a mixture of microheterogeneous molecular species. *Aequoria* jellyfish extracts contain as many as twelve distinct variants of the protein [see, e.g., Prasher et al. (197) Biochemistry 26:1326-1332; Blinks et al. (1975) Fed. Proc. 34:474].
15 DNA encoding numerous forms has been isolated [see, e.g., SEQ ID Nos. 5-9 and 13].

The photoprotein can be reconstituted [see, e.g., U.S. Patent No. 5,023,181] by combining the apoprotein, such as a protein recombinantly produced in *E. coli*, with a coelenterazine, such as a synthetic coelenterazine, in
20 the presence of oxygen and a reducing agent [see, e.g., Shimomura et al. (1975) Nature 256:236-238; Shimomura et al. (1981) Biochemistry J. 199:825-828], such as 2-mercaptoethanol, and also EDTA or EGTA [concentrations between about 5 to about 100 mM or higher for applications herein] tie up any Ca^{2+} to prevent triggering the oxidation reaction until desired. DNA encoding a
25 modified form of the apoprotein that does not require 2-mercaptoethanol for reconstitution is also available [see, e.g., U.S. Patent No. U.S. Patent No. 5,093,240]. The reconstituted photoprotein is also commercially available [sold, e.g., under the trademark AQUALITE[®], which is described in U.S. Patent No. 5,162,227].

30 The light reaction is triggered by adding Ca^{2+} at a concentration sufficient to overcome the effects of the chelator and achieve the 10^{-6} M concentration. Because such low concentrations of Ca^{2+} can trigger the

-35-

reaction, for use in the methods and apparatus herein, higher concentrations of chelator may be included in the compositions of photoprotein. Accordingly, higher concentrations of added Ca^{2+} in the form of a calcium salt will be required. Precise amounts may be empirically determined. For use herein, it

5 may be sufficient to merely add water to the photoprotein, which is provided in the form of a concentrated composition or in lyophilized or powdered form. Thus, for purposes herein, addition of small quantities of Ca^{2+} , such as those present in most tap water or in phosphate buffered saline (PBS) or other suitable buffers or possible in the moisture on the skin, should trigger the

10 bioluminescence reaction.

Numerous isoforms of the aequorin apoprotein been identified isolated. DNA encoding these proteins has been cloned, and the proteins and modified forms thereof have been produced using suitable host cells [see, e.g., U.S. Patent Nos. 5,162,227, 5,360,728, 5,093,240; see, also, Prasher et al. (1985)

15 Biophys. Biochem. Res. Commun. 126:1259-1268; Inouye et al. (1986) Biochemistry 25: 8425-8429]. U.S. Patent No. 5,093,240; U.S. Patent No. 5,360,728; U.S. Patent No. 5,139,937; U.S. Patent No. 5,288,623; U.S. Patent No. 5,422,266, U.S. Patent No. 5,162,227 and SEQ ID Nos. 5-13, which set forth DNA encoding the apoprotein; and a form is commercially

20 available form Sealite, Sciences, Bogart, GA as AQUALITE[®]]. DNA encoding apoaequorin or variants thereof is useful for recombinant production of high quantities of the apoprotein. The photoprotein is reconstituted upon addition of the luciferin, coelenterazine, preferably a sulfated derivative thereof, or an analog thereof, and molecular oxygen [see, e.g., U.S. Patent No. 5,023,181].

25 The apoprotein and other constituents of the photoprotein and bioluminescence generating reaction can be mixed under appropriate conditions to regenerate the photoprotein and concomitantly have the photoprotein produce light. Reconstitution requires the presence of a reducing agent, such as mercaptoethanol, except for modified forms, discussed below, that are designed

30 so that a reducing agent is not required. [see, e.g., U.S. Patent No. 5,093,240].

For use herein, it is preferred aequorin is produced using DNA, such as that set forth in SEQ ID Nos. 5-13 and known to those of skill in the art or

-36-

modified forms thereof. The DNA encoding aequorin is expressed in a host cell, such as E. coli, isolated and reconstituted to produce the photoprotein [see, e.g., U.S. Patent Nos. 5,418,155, 5,292,658, 5,360,728, 5,422,266, 5,162,227].

5 Of interest herein, are forms of the apoprotein that have been modified so that the bioluminescent activity is greater than unmodified apoaequorin [see, e.g., U.S. Patent No. 5,360,728, SEQ ID Nos. 10-12]. Modified forms that exhibit greater bioluminescent activity than unmodified apoaequorin include proteins having sequences set forth in SEQ ID Nos. 10-12, in which aspartate
10 124 is changed to serine, glutamate 135 is changed to serine, and glycine 129 is changed to alanine, respectively. Other modified forms with increased bioluminescence are also available.

For use in certain embodiments herein, the apoprotein and other components of the aequorin bioluminescence generating system are packaged
15 or provided as a mixture, which, when desired is subjected to conditions under which the photoprotein reconstitutes from the apoprotein, luciferin and oxygen [see, e.g., U.S. Patent No. 5,023,181; and U.S. Patent No. 5,093,240]. Particularly preferred are forms of the apoprotein that do not require a reducing agent, such as 2-mercaptoethanol, for reconstitution. These forms, described,
20 for example in U.S. Patent No. 5,093,240 [see, also Tsuji et al. (1986) Proc. Natl. Acad. Sci. U.S.A. 83:8107-8111], are modified by replacement of one or more, preferably all three cysteine residues with, for example serine. Replacement may be effected by modification of the DNA encoding the aequorin apoprotein, such as that set forth in SEQ ID No. 5, and replacing the cysteine
25 codons with serine.

The photoproteins and luciferases from related species, such as *Obelia* are also contemplated for use herein. DNA encoding the Ca^{2+} -activated photoprotein obelin from the hydroid polyp *Obelia longissima* is known and available [see, e.g., Illarionov et al. (1995) Gene 153:273-274; and Bondar et al. (1995) Biochim. Biophys. Acta 1231:29-32]. This photoprotein can also be
30 activated by Mn^{2+} [see, e.g., Vysotski et al. (1995) Arch. Bioch. Biophys. 316:92-93, Vysotski et al. (1993) J. Biolumin. Chemilumin. 8:301-305].


-37-

In general for use herein, the components of the bioluminescence are packaged or provided so that there is insufficient metal ions to trigger the reaction. When used, the trace amounts of triggering metal ion, particularly Ca^{2+} is contacted with the other components. For a more sustained glow,

5 aequorin can be continuously reconstituted or can be added or can be provided in high excess.


(2) Luciferin

The aequorin luciferin is coelenterazine and analogs therein, which include molecules having the structure [formula (I)]:



20 in which R_1 is $\text{CH}_2\text{C}_6\text{H}_5$ or CH_3 ; R_2 is C_6H_5 , and R_3 is $p\text{-C}_6\text{H}_4\text{OH}$ or CH_3 or other such analogs that have activity. Preferred coelenterazine has the structure in which R_1 is $p\text{-CH}_2\text{C}_6\text{H}_4\text{OH}$, R_2 is C_6H_5 , and R_3 is $p\text{-C}_6\text{H}_4\text{OH}$, which can be prepared by known methods [see, e.g., Inouye *et al.* (1975) *Jap. Chem. Soc., Chemistry Ltrrs.* pp 141-144; and Halt *et al.* (1979) *Biochemistry* 18:2204-


25 2210]. A preferred coelenterazine has the structure (formula (II)):

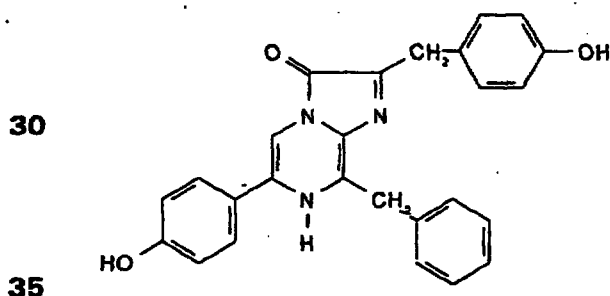

and sulfated derivatives thereof. Also preferred are coelenterazine derivatives that are configured to increase the turnover number and produce more light with certain enzymes. For example, the coelenterazine that has an acetyl or

propylene R' group in position 3 instead of the phenolic increases turnover about seven-fold with Renilla luciferase but not with Oplophorus luciferase [which already has about 10 times the turnover number of the renilla enzyme]. Other alterations of coelenterazine that change the light-emitting characteristics thereof are also contemplated. The methyl-benzyl intermediate of coelenterazine has been shown to decrease the flash duration of obelin and most probably aequorin, with a 30% drop in photon output. This makes a shorter flash.

10 The reaction of coelenterazine when bound to the aequorin photoprotein with bound oxygen and in the presence of Ca^{2+} can be represented as follows:

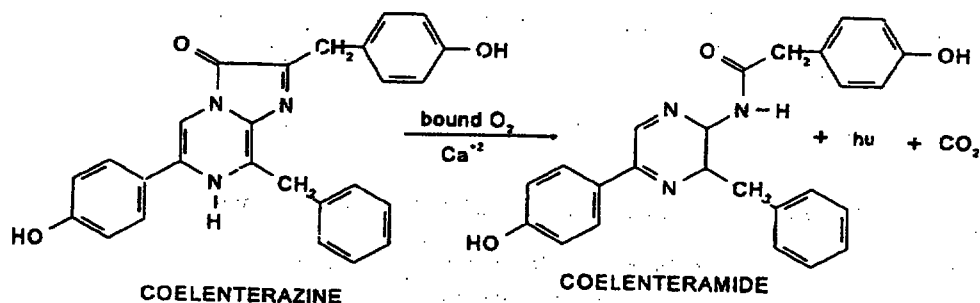

The photoprotein aequorin [which contains apoaequorin bound to a coelenterate luciferin molecule] and *Renilla* luciferase, discussed below, can use the same coelenterate luciferin. The aequorin photoprotein catalyses the oxidation of coelenterate luciferin [coelenterazine] to oxyluciferin.

15 [coelenteramide] with the concomitant production of blue light ($\lambda_{\text{max}} = 469 \text{ nm}$).

Importantly, the sulfate derivative of the coelenterate luciferin [lauryl-luciferin] is particularly stable in water, and thus may be used in a coelenterate-like bioluminescence generating system. In this system, adenosine diphosphate (ADP) and a sulpha-kinase are used to convert the coelenterazine to the sulphated form. Sulfatase is then used to reconvert the lauryl-luciferin to the native coelenterazine. Thus, the more stable lauryl-luciferin is used in the item to be illuminated and the luciferase combined with the sulfatase are added to the luciferin mixture when illumination is desired.

-39-

Thus, the bioluminescence generating system of *Aequorea* is particularly suitable for use in the methods and apparatus herein. The particular amounts and the manner in which the components are provided depends upon the selected combination of article of manufacture. This system can be provided in lyophilized form, that will glow upon addition of Ca^{2+} . It can be encapsulated, linked to matrices, such as porous glass, or in as a compositions, such as a solution or suspension, preferably in the presence of sufficient chelating agent to prevent triggering the reaction. The concentration of the aequorin photoprotein will vary and can be determined empirically. Typically concentrations of at least 0.1 mg/l, more preferably at least 1 mg/l and higher, will be selected. In certain embodiments, 1-10 mg luciferin/100 mg of luciferase will be used in selected volumes and at the desired concentrations will be used.

b. The *Renilla* system

Representative of coelenterate systems is the *Renilla* system. *Renilla*, also known as sea pansies, are members of the class of coelenterates Anthozoa, which includes other bioluminescent genera, such as *Cavarnularia*, *Ptilosarcus*, *Stylatula*, *Acanthoptilum*, and *Parazoanthus*. Bioluminescent members of the Anthozoa genera contain luciferases and luciferins that are similar in structure [see, e.g., Cormier et al. (1973) *J. Cell. Physiol.* 81:291-298; see, also Ward et al. (1975) *Proc. Natl. Acad. Sci. U.S.A.* 72:2530-2534]. The luciferases and luciferins from each of these anthozoans crossreact and produce a characteristic blue luminescence.

Renilla luciferase and the other coelenterate and ctenophore luciferases, such as the aequorin photoprotein, use imidazopyrazine substrates, particularly the substrates generically called coelenterazine [see, formulae (I) and (II), above]. Other genera that have luciferases that use a coelenterazine include: squid, such as *Chiroteuthis*, *Eucleoteuthis*, *Onychoteuthis*, *Watasenia*; cuttlefish, *Sepiolina*; shrimp, such as *Oplophorus*, *Sergestes*, and *Gnathophausia*; deep-sea fish, such as *Argyrops*, *Yarella*, *Diaphus*, and *Neoscolepis*.

-40-

Renilla luciferase does not, however, have bound oxygen, and thus requires dissolved oxygen in order to produce light in the presence of a suitable luciferin substrate. Since *Renilla* luciferase acts as a true enzyme [i.e., it does not have to be reconstituted for further use] the resulting luminescence can be long-lasting in the presence of saturating levels of luciferin. Also, *Renilla* luciferase is relatively stable to heat.

Renilla luciferase, DNA encoding *Renilla* luciferase, and use of the DNA to produce recombinant luciferase, as well as DNA encoding luciferase from other coelenterates, are well known and available [see, e.g., SEQ ID No. 1, U.S. Patent Nos. 5,418,155 and 5,292,658; see, also, Prasher *et al.* (1985) *Biochem. Biophys. Res. Commun.* 126:1259-1268; Cormier (1981) "Renilla and Aequorea bioluminescence" in *Bioluminescence and Chemiluminescence*, pp. 225-233; Charbonneau *et al.* (1979) *J. Biol. Chem.* 254:769-780; Ward *et al.* (1979) *J. Biol. Chem.* 254:781-788; Lorenz *et al.* (1981) *Proc. Natl. Acad. Sci. U.S.A.* 88: 4438-4442; Hori *et al.* (1977) *Proc. Natl. Acad. Sci. U.S.A.* 74:4285-4287; Hori *et al.* (1975) *Biochemistry* 14:2371-2376; Hori *et al.* (1977) *Proc. Natl. Acad. Sci. U.S.A.* 74:4285-4287; Inouye *et al.* (1975) *Jap. Soc. Chem. Lett.* 141-144; and Matthews *et al.* (1979) *Biochemistry* 16:85-91]. The DNA encoding *Renilla* luciferase and host cells containing such DNA provide a convenient means for producing large quantities of the enzyme [see, e.g., U.S. Patent Nos. 5,418,155 and 5,292,658, which describe recombinant production of *Renilla* luciferase and the use of the DNA to isolate DNA encoding other luciferases, particularly those from related organisms]. A modified version of a method [U.S. Patent Nos. 5,418,155 and 5,292,658] for the recombinant production of *Renilla* luciferase that results in a higher level of expression of the recombinant enzyme is presented in the EXAMPLES herein.

When used herein, the *Renilla* luciferase can be packaged, such as in an toy, in lyophilized form, encapsulated in a vehicle, either by itself or in combination with the luciferin substrate. Prior to use the mixture is contacted with an aqueous composition, preferably a phosphate buffered saline or other suitable buffer, such a Tris-based buffer [such as 0.1 mM Tris, 0.1 mM EDTA] pH 7-8, preferably about pH 8; dissolved O₂ will activate the reaction. Addition

-41-

of glycerol [about 1%] increases light intensity. Final concentrations of luciferase in the glowing mixture will be on the order of 0.01 to 1 mg/l or more. Concentrations of luciferin will be at least about 10^{-8} M, but 1 to 100 or more orders of magnitude higher to produce a long lasting bioluminescence.

- 5 In certain embodiments herein, about 1 to 10 mg, or preferably 2-5 mg, more preferably about 3 mg of coelenterazine will be used with about 100 mg of *Renilla* luciferase. The precise amounts, of course can be determined empirically, and, also will depend to some extent on the ultimate concentration and application. In particular, about addition of about 0.25 ml of a crude
- 10 extract from the bacteria that express *Renilla* to 100 ml of a suitable assay buffer and about 0.005 μ g was sufficient to produce a visible and lasting glow [see, U.S. Patent Nos. 5,418,155 and 5,292,658, which describe recombinant production of *Renilla* luciferase].

- Lyophilized mixtures, and compositions containing the *Renilla* luciferase
- 15 are also provided. The luciferase or mixtures of the luciferase and luciferin may also be encapsulated into a suitable delivery vehicle, such as a liposome, glass particle, capillary tube, drug delivery vehicle, gelatin, time release coating or other such vehicle. Kits containing these mixtures, compositions, or vehicles and also a selected article of manufacture, such as a toy gun, bubble
- 20 composition, balloon, item of clothing, personal item, are also provided. The luciferase may also be linked to a substrate, such as cotton, polyester, polyester-cotton blends, polypropylene, polyvinyltoluene, polyvinyl propylene, glass, ceramic, or plastics are provided in combination with or as part of an article of manufacture.

25 3. Crustacean, particularly *Cypridina* systems

 The ostracods, such as *Vargula serratta*, *hilgendorffii* and *noctiluca* are small marine crustaceans, sometimes called sea fireflies. These sea fireflies are found in the waters off the coast of Japan and emit light by squirting luciferin and luciferase into the water, where the reaction, which produces a bright blue

-42-

luminous cloud, occurs. The reaction involves only luciferin, luciferase and molecular oxygen, and, thus, is very suitable for application herein.

The systems, such as the *Vargula* bioluminescence generating systems, are particularly preferred herein because the components are stable at room temperature if dried and powdered and will continue to react even if contaminated. Further, the bioluminescent reaction requires only the luciferin/luciferase components in concentrations as low as 1:40 parts per billion to 1:100 parts per billion, water and molecular oxygen to proceed. An exhausted system can be renewed by addition of luciferin.

10 a. *Vargula* luciferase

Vargula luciferase is a 555-amino acid polypeptide that has been produced by isolation from *Vargula* and also using recombinant technology by expressing the DNA in suitable bacterial and mammalian host cells [see, e.g., Thompson *et al.* (1989) Proc. Natl. Acad. Sci. U.S.A. **86**:6567-6571; Inouye *et al.* (1992) Proc. Natl. Acad. Sci. U.S.A. **89**:9584-9587; Johnson *et al.* (1978) Methods in Enzymology **LVII**:331-349; Tsuji *et al.* (1978) Methods Enzymol. **57**:364-72; Tsuji (1974) Biochemistry **13**:5204-5209; Japanese Patent Application No. JP 3-30678 Osaka; and European Patent Application No. EP 0 387 355 A1].

20 (1) Purification from *Cypridina*

Methods for purification of *Vargula* [*Cypridina*] luciferase are well known. For example, crude extracts containing the active can be readily prepared by grinding up or crushing the *Vargula* shrimp. In other embodiments, a preparation of *Cypridina hilgendorfi* luciferase can be prepared by immersing stored frozen *C. hilgendorfi* in distilled water containing, 0.5-5.0 M salt, preferably 0.5-2.0 M sodium or potassium chloride, ammonium sulfate, at 0-30° C, preferably 0-10° C, for 1-48 hr, preferably 10-24 hr, for extraction followed by hydrophobic chromatography and then ion exchange or affinity chromatography [TORAY IND INC, Japanese patent application JP 4258288, published September 14, 1993; see, also, Tsuji *et al.* (1978) Methods Enzymol. **57**:364-72 for other methods].

-43-


The luciferin can be isolated from ground dried *Vargula* by heating the extract, which destroys the luciferase but leaves the luciferin intact [see, e.g., U.S. Patent No. 4,853,327].

(2) Preparation by Recombinant Methods

5 The luciferase is preferably produced by expression of cloned DNA encoding the luciferase [European Patent Application NO. 0 387 355 A1; International PCT Application No. WO90/01542; see, also SEQ ID No. 5, which sets forth the sequence from Japanese Patent Application No. JP 3-30678 and Thompson et al. (1989) Proc. Natl. Acad. Sci. U.S.A. 86:6567-6571] DNA
10 encoding the luciferase or variants thereof is introduced into *E. coli* using appropriate vectors and isolated using standard methods.

b. *Vargula* luciferin

The natural luciferin in a substituted imidazopyrazine nucleus, such a compound of formula (III):

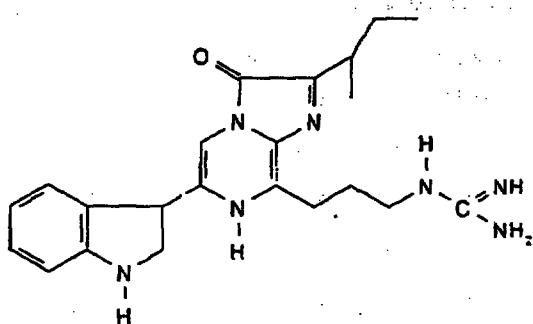

Analogs thereof and other compounds that react with the luciferase in a light producing reaction also may be used.

Other bioluminescent organisms that have luciferases that can react with
35 the *Vargula* luciferin include, the genera *Apogon*, *Parapriacanthus* and *Porichthys*.

-44-

c. Reaction

The luciferin upon reaction with oxygen forms a dioxetanone intermediate [which includes a cyclic peroxide similar to the firefly cyclic peroxide molecule intermediate]. In the final step of the bioluminescent reaction, the peroxide breaks down to form CO₂ and an excited carbonyl. The excited molecule then emits a blue to blue-green light.

The optimum pH for the reaction is about 7. For purposes herein, any pH at which the reaction occurs may be used. The concentrations of reagents are those normally used for analytical reactions or higher [see, e.g., Thompson et al. (1990) Gene 96:257-262]. Typically concentrations of the luciferase between 0.1 and 10 mg/l, preferably 0.5 to 2.5 mg/l will be used. Similar concentrations or higher concentrations of the luciferin may be used.

4. Insect bioluminescence generating systems including firefly, click beetle, and other insect systems

The biochemistry of firefly bioluminescence was the first bioluminescence generating system to be characterized [see, e.g., Wienhausen et al. (1985) Photochemistry and Photobiology 42:609-611; McElroy et al. (1966) in *Molecular Architecture in Cell Physiology*, Hayashi et al., eds. Prentice Hall, Inc., Englewood Cliffs, NJ, pp. 63-80] and it is commercially available [e.g., from Promega Corporation, Madison, WI, see, e.g., Leach et al. (1986) Methods in Enzymology 133:51-70, esp. Table 1, see also U.S. Patent No. 5,503,924]. Luciferases from different species of fireflies are antigenically similar. These species include members of the genera *Photinus*, *Photurins* and *Luciola*. Further, the bioluminescent reaction produces more light at 30°C than at 20°C, the luciferase is stabilized by small quantities of bovine albumin serum, and the reaction can be buffered by tricine.

a. Luciferase

DNA clones encoding luciferases from various insects and the use to produce the encoded luciferase is well known. For example, DNA clones that encode luciferase from *Photinus pyralis*, *Luciola cruciata* [see, e.g., de Wet et al. (1985) Proc. Natl. Acad. Sci. U.S.A. 82:7870-7873; de We et al. (1986) Methods in Enzymology 133:3; U.S. Patent No. 4,968,613, see, also SEQ ID No. 3] are available. The DNA has also been expressed in *Saccharomyces* [see,

-45-

e.g., Japanese Application No. JP 63317079, published December 26, 1988, KIKKOMAN CORP] and in tobacco.

In addition to the wild-type luciferase modified insect luciferases have been prepared. For example, heat stable luciferase mutants, DNA-encoding the
5 mutants, vectors and transformed cells for producing the luciferases are available. A protein with 60% amino acid sequence homology with luciferases from *Photinus pyralis*, *Luciola mingrelica*, *L. cruciata* or *L. lateralis* and having luciferase activity is available [see, e.g., International PCT Application No. WO95/25798]. It is more stable above 30° C than naturally-occurring insect
10 luciferases and may also be produced at 37° C or above, with higher yield.

Modified luciferases that generate light at different wavelengths [compared with native luciferase], and thus, may be selected for their color-producing characteristics. For example, synthetic mutant beetle luciferase(s) and DNA encoding such luciferases that produce bioluminescence at a
15 wavelength different from wild-type luciferase are known [Promega Corp, International PCT Application No. WO95/18853, which is based on U.S. application Serial No. 08/177,081 1/3/94]. The mutant beetle luciferase has an amino acid sequence differing from that of the corresponding wild-type *Luciola cruciata* [see, e.g., U.S. Patent Nos. 5,182,202, 5,219,737, 5,352,598, see,
20 also SEQ ID No.3] by a substitution(s) at one or two positions. The mutant luciferase produces a bioluminescence with a wavelength of peak intensity that differs by at least 1 nm from that produced by wild-type luciferases.

Other mutant luciferase have also been produced. Mutant luciferases with the amino acid sequence of wild-type luciferase, but with at least one
25 mutation in which valine is replaced by isoleucine at the amino acid number 233, valine by isoleucine at 239, serine by asparagine at 286, glycine by serine at 326, histidine by tyrosine at 433 or proline by serine at 452 are known [see, e.g., U.S. Patent Nos. 5,219,737, and 5,330,906]. The luciferases are produced by expressing DNA-encoding each mutant luciferase in *E. coli* and
30 isolating the protein. These luciferases produce light with colors that differ from wild-type. The mutant luciferases catalyze luciferin to produce red [λ 609 nm and 612 nm], orange[λ 595 and 607 nm] or green [λ 558 nm] light. The other


-46-

physical and chemical properties of mutant luciferase are substantially identical to native wild type-luciferase. The mutant luciferase has the amino acid sequence of *Luciola cruciata* luciferase with an alteration selected from Ser 286 replaced by Asn, Gly 326 replaced by Ser, His 433 replaced by Tyr or Pro 452 replaced by Ser. Thermostable luciferases are also available [see, e.g., U.S. Patent No. 5,229,285; see, also International PCT Application No. @) 95/25798, which provides *Photinus* luciferase in which the glutamate at position 354 is replaced lysine and *Luciola* luciferase in which the glutamate at 356 is replaced with lysine].


- 10 These mutant luciferases as well as the wild type luciferases are among those preferred herein, particularly in instances when a variety of colors are desired or when stability at higher temperatures is desired.
- It is also noteworthy that firefly luciferases have alkaline pH optima [7.5 -9.5], and, thus, are suitable for use in combination with articles of manufacture, such as the bubble compositions that have alkaline pH.

b. Luciferin

The firefly luciferin is a benzothiazole:



- 25 Analogs of this luciferin and synthetic firefly luciferins are also known to those of skill in art [see, e.g., U.S. Patent No. 5,374,534 and 5,098,828]. These include compounds of formula (IV) [see, U.S. Patent No. 5,098,828]:

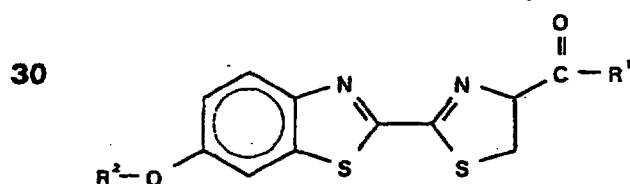

- 35 in which:

R¹ is hydroxy, amino, linear or branched C₁-C₂₀ alkoxy, C₂-C₂₀ alkyenyloxy, an L-amino acid radical bond via the α-amino group, an

-47-

oligopeptide radical with up to ten L-amino acid units linked via the α -amino group of the terminal unit;

R^2 is hydrogen, H_2PO_3 , HSO_3 , unsubstituted or phenyl substituted linear or branched C_1 - C_{20} alkyl or C_2 - C_{20} alkenyl, aryl containing 6 to 18 carbon atoms, or R^3 -C(O)-; and

R^3 is an unsubstituted or phenyl substituted linear or branched C_1 - C_{20} alkyl or C_2 - C_{20} alkenyl, aryl containing 6 to 18 carbon atoms, a nucleotide radical with 1 to 3 phosphate groups, or a glycosidically attached mono- or disaccharide, except when formula (IV) is a D-luciferin or D-luciferin methyl ester.

c. Reaction

The reaction catalyzed by firefly luciferases and related insect luciferases requires ATP, Mg^{2+} as well as molecular oxygen. Luciferin must be added exogenously. Firefly luciferase catalyzes the firefly luciferin activation and the subsequent steps leading to the excited product. The luciferin reacts with ATP to form a luciferyl adenylate intermediate. This intermediate then reacts with oxygen to form a cyclic luciferyl peroxy species, similar to that of the coelenterate intermediate cyclic peroxide, which breaks down to yield CO_2 and an excited state of the carbonyl product. The excited molecule then emits a yellow light; the color, however, is a function of pH. As the pH is lowered the color of the bioluminescence changes from yellow-green to red.

Different species of fireflies emit different colors of bioluminescence so that the color of the reaction will be dependent upon the species from which the luciferase is obtained. Additionally, the reaction is optimized at pH 7.8.

Addition of ATP and luciferin to a reaction that is exhausted produces additional light emission. Thus, the system, once established, is relatively easily maintained. Therefore, it is highly suitable for use herein in embodiments in which a sustained glow is desired or reuse of the item is contemplated. Thus, the components of a firefly system can be packaged with the item of manufacture, such as a toy gun, and then combined with the article before use. For example, the luciferin and ATP can be added to a mild bubble or a protein composition that contains luciferase each time the bubbles are used.

-48-

5. Bacterial systems

Luminous bacteria typically emit a continuous light, usually blue-green. When strongly expressed, a single bacterium may emit 10^4 to 10^5 photons per second. Bacterial bioluminescence systems include, among others, those systems found in the bioluminescent species of the genera *Photobacterium*, *Vibrio* and *Xenorhabdus*. These systems are well known and well characterized [see, e.g., Baldwin *et al.* (1984) *Biochemistry* 23:3663-3667; Nicoli *et al.* (1974) *J. Biol. Chem.* 249:2393-2396; Welches *et al.* (1981) *Biochemistry* 20:512-517; Engebrecht *et al.* (1986) *Methods in Enzymology* 133:83-99; Frackman *et al.* (1990) *J. of Bacteriology* 172:5767-5773; Miyamoto *et al.* (1986) *Methods in Enzymology* 133:70; U.S. Patent No. 4,581,335].

a. Luciferases

Bacterial luciferase, as exemplified by luciferase derived from *Vibrio harveyi* [EC 1.14.14.3, alkanol reduced-FMN-oxygen oxidoreductase 1-hydroxylating, luminescing], is a mixed function oxidase, formed by the association of two different protein subunits α and β . The α -subunit has an apparent molecular weight of approximately 42,000 kD and the β -subunit has an apparent molecular weight of approximately 37,000 kD [see, e.g., Cohn *et al.* (1989) *Proc. Natl. Acad. Sci. U.S.A.* 90:102-123]. These subunits associate to form a 2-chain complex luciferase enzyme, which catalyzes the light emitting reaction of bioluminescent bacteria, such as *Vibrio harveyi* [U.S. Patent No. 4,581,335; Belas *et al.* (1982) *Science* 218:791-793], *Vibrio fischeri* [Engebrecht *et al.* (1983) *Cell* 32:773-781; Engebrecht *et al.* (1984) *Proc. Natl. Acad. Sci. U.S.A.* 81:4154-4158] and other marine bacteria.

Bacterial luciferase genes have been cloned [see, e.g., U.S. Patent No. 5,221,623; U.S. Patent No. 4,581,335; European Patent Application No. EP 386 691 A]. Plasmids for expression of bacterial luciferase, such as *Vibrio harveyi*, include pFIT001 (NRRL B-18080), pPALE001 (NRRL B-18082) and pMR19 (NRRL B-18081) are known. For example the sequence of the entire *lux* regulon from *Vibrio fischeri* has been determined [Baldwin *et al.* (1984), *Biochemistry* 23:3663-3667; Baldwin *et al.* (1981) *Biochem.* 20: 512-517; Baldwin *et al.* (1984) *Biochem.* 23:3663-3667; see, also, e.g., U.S. Patent Nos.


-49-

5,196,318, 5,221,623, and 4,581,335]. This regulon includes *luxI* gene, which encodes a protein required for autoinducer synthesis [see, e.g., Engebrecht *et al.* (1984) *Proc. Natl. Acad. Sci. U.S.A.* 81:4154-4158], the *luxC*, *luxD*, and *luxE* genes, which encode enzymes that provide the luciferase with an aldehyde substrate, and the *luxA* and *luxB* genes, which encode the alpha and beta subunits of the luciferase.

Lux genes from other bacteria have also been cloned and are available [see, e.g., Cohn *et al.* (1985) *J. Biol. Chem.* 260:6139-6146; U.S. Patent No. 5,196,524, which provides a fusion of the *luxA* and *luxB* genes from *Vibrio harveyi*]. Thus, luciferase alpha and beta subunit-encoding DNA is provided and can be used to produce the luciferase. DNA encoding the α [1065 bp] and β [984 bp] subunits, DNA encoding a luciferase gene of 2124 bp, encoding the alpha and beta subunits, a recombinant vector containing DNA encoding both subunits and a transformed *E. coli* and other bacterial hosts for expression and production of the encoded luciferase are available. In addition, bacterial luciferases are commercially available.

b. Luciferins

Bacterial luciferins include:

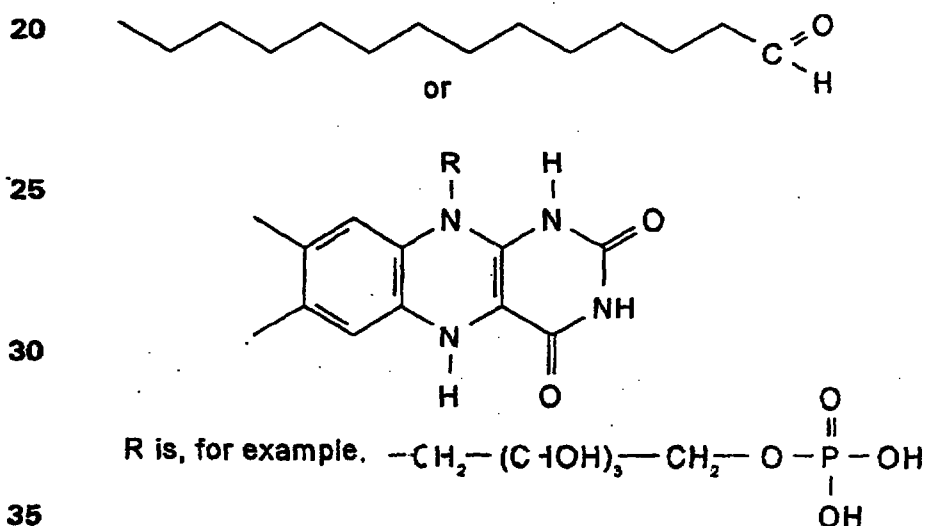

-50-

in which the tetradecanal with reduced flavin mononucleotide are considered luciferin since both are oxidized during the light emitting reaction.

c. Reactions

- The bacterial systems require, in addition to reduced flavin, five
- 5 polypeptides to complete the bioluminescent reaction: two subunits, α and β , of bacterial luciferin and three units of a fatty acid reductase system complex, which supplies the tetradecanal aldehyde. Examples of bacterial bioluminescence generating systems useful in the apparatus and methods provided herein include those derived from *Vibrio fischeri* and *Vibrio harveyi*.
- 10 One advantage to this system is its ability to operate at cold temperatures. It will thus be particularly amenable to use in ice cubes. All components of a bacterial system can be frozen into ice cubes. As the ice cubes melt into a warmer beverage, which has dissolved O_2 , the reaction will proceed, thereby providing a sustained glow.
- 15 Bacterial luciferase catalyzes the flavin-mediated hydroxylation of a long-chain aldehyde to yield carboxylic acid and an excited flavin; the flavin decays to ground state with the concomitant emission of blue green light ($\lambda_{max} = 490$ nm; see, e.g., Legocki et al. (1986) Proc. Natl. Acad. Sci. USA 81:9080; see U.S. Patent No. 5,196,524):



- 20 The reaction can be initiated by contacting reduced flavin mononucleotide [$FMNH_2$] with a mixture of the bacterial luciferase, oxygen, and a long-chain aldehyde, usually n-decyl aldehyde.
- DNA encoding luciferase from the fluorescent bacterium *Alteromonas*
- 25 *hanedai* is known [CHISSO CORP; see, also, Japanese application JP 7222590, published August 22, 1995]. The reduced flavin mononucleotide [$FMNH_2$; luciferin] reacts with oxygen in the presence of bacterial luciferase to produce an intermediate peroxy flavin. This intermediate reacts with a long-chain aldehyde [tetradecanal] to form the acid and the luciferase-bound hydroxy flavin
- 30 in its excited state. The excited luciferase-bound hydroxy flavin then emits light and dissociates from the luciferase as the oxidized flavin mononucleotide [FMN]

-51-

and water. In vivo FMN is reduced again and recycled, and the aldehyde is regenerated from the acid.

Flavin reductases have been cloned [see, e.g., U.S. Patent No. 5,484,723; see, SEQ ID No. 14 for a representative sequence from this patent].


- 5 These as well as NAD(P)H can be included in the reaction to regenerate FMNH₂ for reaction with the bacterial luciferase and long chain aldehyde. The flavin reductase catalyzes the reaction of FMN, which is the luciferase reaction, into FMNH₂; thus, if luciferase and the reductase are included in the reaction system, it is possible to maintain the bioluminescent reaction. Namely, since the
- 10 bacterial luciferase turns over many times, bioluminescence continues as long as a long chain aldehyde is present in the reaction system.

- The color of light produced by bioluminescent bacteria also results from the participation of a protein blue-fluorescent protein [BFP] in the bioluminescence reaction. This protein, which is well known [see, e.g., Lee et al. (1978) Methods in Enzymology LVII:226-234], may also be added to
- 15 bacterial bioluminescence reactions in order to cause a shift in the color.

6. Other systems

a. Dinoflagellate bioluminescence generating systems

- In dinoflagellates, bioluminescence occurs in organelles termed
- 20 scintillons. These organelles are outpocketings of the cytoplasm into the cell vacuole. The scintillons contain only dinoflagellate luciferase and luciferin [with its binding protein], other cytoplasmic components being somehow excluded. The dinoflagellate luciferin is a tetrapyrrole related to chlorophyll:

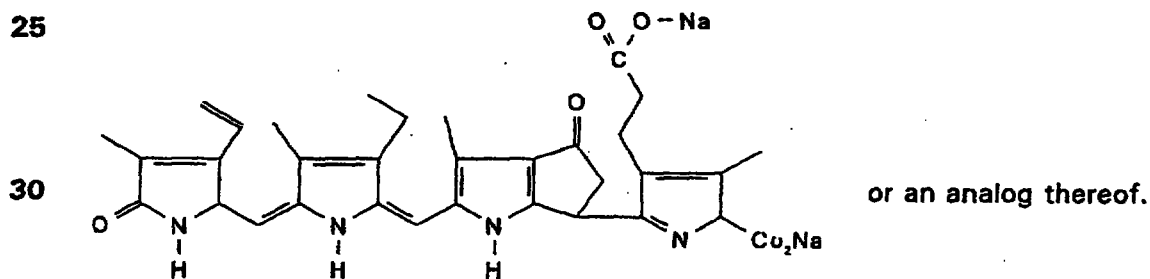

- 35 The luciferase is a 135 kD single chain protein that is active at pH 6.5, but inactive at pH 8 [see, e.g., Hastings (1981) Bioluminescence and


-52-

Chemiluminescence, DeLuca et al., eds. Academic Press, NY, pp.343-360].


Luminescent activity can be obtained in extracts made at pH 8 by shifting the pH from 8 to 6. This occurs in soluble and particulate fractions. Within the intact scintillon, the luminescent flash occurs for ~ 100 msec, which is the duration of the flash *in vivo*. In solution, the kinetics are dependent on dilution, as in any enzymatic reaction. At pH 8, the luciferin is bound to a protein [luciferin binding protein] that prevents reaction of the luciferin with the luciferase. At pH 6, however, the luciferin is released and free to react with the enzyme.

10 **b. Systems from molluscs, such as *Latia* and *Pholas***

Molluscs *Latia neritoides* and species of *Pholas* are bioluminescent animals. The luciferin has the structure:

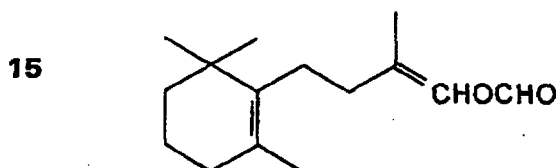

20 and has been synthesized [see, e.g., Shimomura et al. (1968) Biochemistry 7:1734-1738; Shimomura et al. (1972) Proc. Natl. Acad. Sci. U.S.A. 69:2086-2089]. In addition to a luciferase and luciferin the reaction has a third component, a "purple protein". The reaction, which can be initiated by an exogenous reducing agent is represented by the following scheme:




XH₂ is a reducing agent.

Thus for practice herein, the reaction will require the purple protein as well as a reducing agent.

30 **c. Earthworms and other annelids**

Earthworm species, such as *Diplocardia longa*, *Chaetopterus* and *Harmothoe*, exhibit bioluminescence. The luciferin has the structure:

-53-

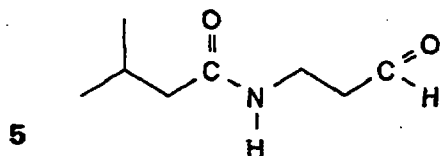

The reaction requires hydrogen peroxide in addition to luciferin and luciferase. The luciferase is a photoprotein.

10 **d. Glow worms**

The luciferase/luciferin system from the glow worms that are found in New Zealand caves, Australia and those found in Great Britain are also intended for use herein.

e. Marine polychaete worm systems

15 Marine polychaete worm bioluminescence generating systems, such as *Phyxtrix* and *Chaetopterus*, are also contemplated for use herein.

f. South American railway beetle

The bioluminescence generating system from the South American railway beetle is also intended for use herein.

20 **g. Fish**

Of interest herein, are luciferases and bioluminescence generating systems that generate red light. These include luciferases found in species of *Aristostomias*, such as *A. scintillans* [see, e.g., O'Day et al. (1974) Vision Res. 14:545-550], *Pachystomias*, *Malacosteus*, such as *M. niger*.

25 **7. Fluorescent Proteins**

a. Green and blue fluorescent proteins

As described herein, blue light is produced using the *Renilla* luciferase or the *Aequorea* photoprotein in the presence of Ca^{2+} and the coelenterazine luciferin or analog thereof. This light can be converted into a green light if a green fluorescent protein (GFP) is added to the reaction. Green fluorescent proteins, which have been purified [see, e.g., Prasher et al. (1992) Gene 111:229-233] and also cloned [see, e.g., International PCT Application No. WO 95/07463, which is based on U.S. application Serial No. 08/119,678 and

30

-54-

U.S. application Serial No. 08/192,274, which are herein incorporated by reference], are used by cnidarians as energy-transfer acceptors. GFPs fluoresce in vivo upon receiving energy from a luciferase-oxyluciferin excited-state complex or a Ca^{2+} -activated photoprotein. The chromophore is modified amino acid residues within the polypeptide. The best characterized GFPs are those of *Aequorea* and *Renilla* [see, e.g., Prasher et al. (1992) Gene 111:229-233; Hart, et al. (1979) Biochemistry 18:2204-2210]. For example, a green fluorescent protein [GFP] from *Aequorea victoria* contains 238 amino acids, absorbs blue light and emits green light. Thus, inclusion of this protein in a composition containing the aequorin photoprotein charged with coelenterazine and oxygen, can, in the presence of calcium, result in the production of green light. Thus, it is contemplated that GFPs may be included in the bioluminescence generating reactions that employ the aequorin or *Renilla* luciferases or other suitable luciferase in order to enhance or alter color of the resulting bioluminescence.

GFPs are activated by blue light to emit green light and thus may be used in the absence of luciferase and in conjunction with an external light source with novelty items, as described herein. Similarly, blue fluorescent proteins (BFPs), such as from *Vibrio fischeri*, *Vibrio harveyi* or *Photobacterium phosphoreum*, may be used in conjunction with an external light source of appropriate wavelength to generate blue light. (See for example, Karatani, et al., "A blue fluorescent protein from a yellow-emitting luminous bacterium," Photochem. Photobiol. 55(2):293-299 (1992); Lee, et al., "Purification of a blue-fluorescent protein from the bioluminescent bacterium *Photobacterium phosphoreum*" Methods Enzymol. (Biolumin. Chemilumin.) 57:226-234 (1978); and Gast, et al. "Separation of a blue fluorescence protein from bacterial luciferase" Biochem. Biophys. Res. Commun. 80(1):14-21 (1978), each, as all references cited herein, incorporated in its entirety by reference herein.) In particular, GFPs, and/or BFPs or other such fluorescent proteins may be used in the beverage and/or food combinations provided herein and served in rooms illuminated with light of an appropriate wavelength to cause the fluorescent proteins to fluoresce.

-55-

GFPs and/or BFPs or other such fluorescent proteins may be used in any of the novelty items and combinations provided herein, such as the beverages and toys, including bubble making toys, particularly bubble-making compositions or mixtures. Such systems are particularly of interest because no luciferase is
5 needed to activate the photoprotein and because the proteins are readily digested. These fluorescent proteins may also be used in addition to bioluminescence generating systems to enhance or create an array of different colors.

These proteins may be used alone or in combination with
10 bioluminescence generating systems to produce an array of colors. They may be used in combinations such that the color of, for example, a beverage changes over time, or includes layers of different colors.

b. Phycobiliproteins

Phycobiliproteins are water soluble fluorescent proteins derived from
15 cyanobacteria and eukaryotic algae [see, e.g., Apt et al. (1995) J. Mol. Biol. 238:79-96; Glazer (1982) Ann. Rev. Microbiol. 36:173-198; and Fairchild et al. (1994) J. of Biol. Chem. 269:8686-8694]. These proteins have been used as fluorescent labels in immunoassay [see, Kronick (1986) J. of Immunolog. Meth. 92:1-13], the proteins have been isolated and DNA encoding them is also
20 available [see, e.g., Pilot et al. (1984) Proc. Natl. Acad. Sci. U.S.A. 81:6983-6987; Lui et al. (1993) Plant Physiol 103:293-294; and Houmard et al. (1988) J. Bacteriol. 170:5512-5521; the proteins are commercially available from, for example, ProZyme, Inc., San Leandro, CA]. In these organisms, the phycobiliproteins are arranged in subcellular structures termed phycobilisomes
25 and function as accessory pigments that participate in photosynthetic reactions by absorbing visible light and transferring the derived energy to chlorophyll via a direct fluorescence energy transfer mechanism.

Two classes of phycobiliproteins are known based on their color: phycoerythrins (red) and phycocyanins (blue), which have reported absorbtion
30 maxima between 490 and 570 nm and between 610 and 665 nm, respectively. Phycoerythrins and phycocyanins are heterogenous complexes composed of different ratios of alpha and beta monomers to which one or more class of linear

-56-

tetrapyrrole chromophores are covalently bound. Particular phycobiliproteins may also contain a third γ -subunit which often associated with $(\alpha\beta)_6$ aggregate proteins. The γ -subunit is covalently bound with phycourobilin, which results in the 495-500 nm absorbance peak of B- and R-phycoerythrins.

- 5 All phycobiliproteins contain either phycothrombilin or phycoerythrobilin chromophores, and may also contain other bilins, such as phycourobilin, cryptoviolin or a 697 nm bilin. Thus, the spectral characteristics of phycobiliproteins may be influenced by the combination of the different chromophores, the subunit composition of the apo-phycobiliproteins and/or the
- 10 local environment that affects the tertiary and quaternary structure of the phycobiliproteins.

- As described above for GFPs & BFPs, phycobiliproteins are also activated by visible light of the appropriate wavelength and thus may be used in the absence of luciferase and in conjunction with an external light source to
- 15 illuminate novelty items, particularly, as described herein. In particular, phycobiliproteins may be used in the beverage and/or food combinations provided herein and served in rooms illuminated with light of an appropriate wavelength to cause the fluorescent proteins to fluoresce. As noted above, these proteins may be used in combination with other fluorescent proteins and/or
- 20 bioluminescence generating systems to produce an array of colors or to provide different colors over time.

- Attachment of phycobiliproteins to solid support matrices is known (e.g., see U.S. Patent Nos. 4,714,682; 4,767,206; 4,774,189 and 4,867,908). For use herein, phycobiliproteins may be coupled to matrices or microcarriers
- 25 coupled to one or more components of the bioluminescent reaction, preferably a luciferase, to convert the wavelength of the light generated from the bioluminescent reaction. Microcarriers coupled to one or more phycobiliproteins may be used in any of the novelty items and combinations provided herein, such as the multicolor beverages and toys, including bubble making toys,
- 30 particularly bubble-making compositions or mixtures.

-57-

C. Practice of the reactions in combination with articles of manufacture

The particular manner in which each bioluminescence system will be combined with a selected article of manufacture will be a function of the article and the desired effect. In general, however, less than all of the components of the reaction will be provided with the article and then contact with the remaining component(s) to produce a glow. There are a multitude of alternative means for achieving this result; some are described herein, and others will be apparent by virtue of the disclosure herein.

In the simplest embodiments, the organisms can be ground up and dried. For example, light will be emitted by ground up fireflies when mixed with water and ATP. Light will also be emitted merely by combining ground up *Vargula* shrimp and adding water, preferably cool water [room temperature or lower]. The only caveat is that the water must not be too hot; high temperatures destroy activity of the luciferases.

In other embodiments, the substantially pure reagents are combined with the article of manufacture and the article will glow or spew a glowing spray or jet. The reagents may be provided in compositions, such as suspensions, as powders, as pastes or any in other suitable form. They may be provided as sprays, aerosols, or in any suitable form. The reagents may be linked to a matrix and combined with the article of manufacture or formed into the article of manufacture. Typically all but one or more, though preferably all but one, of the components necessary for the reaction will be mixed and provided together; reaction will be triggered contacting the mixed component(s) with the remaining component(s), such as by adding Ca^{2+} , FMN with reductase, FMNH_2 , ATP, air or oxygen. The resulting matrix materials are advantageously used in connection numerous novelty items, such as clothing. They are also used in the cartridges provided herein.

In preferred embodiments the luciferase or luciferase/luciferin, such as the aequorin photoprotein, will be provided in combination with the article of manufacture or added before use. The article will then be contacted with the remaining components. As will become apparent herein, there are a multitude

-58-

of ways in which each system may be combined with a selected article of manufacture.

D. Packaging of Bioluminescence Systems

Packaging for bioluminescence generating reagents provided herein must
5 be chosen according to the article of manufacture with which the reagents are to be combined. In general, the packaging is non-reactive with the compositions contained therein and must exclude water and or air to the degree those substances are required for the luminescent reaction to proceed. It will be appreciated, however, that specific uses for the bioluminescence generating
10 systems may require specific packaging. Following are some examples of the special packaging requirements of various end uses of the bioluminescence generating systems. These are offered as examples only and are in no way intended as limiting.

The bioluminescence generating reagents may be provided in pellets,
15 encapsulated as micro or macro-capsules, linked to matrices and included in or on articles of manufacture, or as mixtures in chambers within an article of manufacture or in some other configuration. With respect to other articles of manufacture that include chambers or vessels, such as certain toys, primary considerations are that the bioluminescence generating system be amenable to
20 activation by the user at will and that the container be non-reactive and, if desired, translucent to the bioluminescent glow. Examples of vessels include beverage holders, plates or other dishes, vases, jars, bottles, spray cans and other containers. In general, vessels for use in practicing the methods herein have an enclosed, defined space, that contains most of the components of the
25 bioluminescence generating system, and a separate enclosed, defined space containing the remaining necessary ingredients; such that, the two spaces are separated by a readily removable membrane which, upon removal, permits the components to mix and thereby react, resulting in illumination. Alternatively, the vessel can have a single compartment containing all but the final ingredients
30 of the bioluminescence generating system and being amenable to addition of the final ingredients by the user; for example through an opening in the compartment.

-59-

Any toy, vessel or other article of manufacture that is amenable to having a generally translucent covering defining a space for containment of the bioluminescence generating system components and that is amenable to simple manipulation to permit addition of the final components necessary for the illumination reaction is contemplated.

Thus, whether the item that will glow or produce a glowing fluid, jet or spray, is a toy, vessel or other article of manufacture, its general design is the same. At least one of the bioluminescence generating system components is separated from the remaining components. The remaining components are added prior to use. They can be included in the article of manufacture and physically separated from the other components. For example, the physical separation means are those that are readily removed by the user, to permit mixing, resulting in illumination of the components. For example, an article of manufacture may contain a luciferase and substrate in one compartment and a bioluminescence activator in an adjacent compartment; or alternatively, one compartment may contain the luciferase, and the other the substrate luciferin and dissolved oxygen or other requisite activator(s). The compartments are separated by a dividing member, such as a membrane, that, upon compression of the article of manufacture, ruptures permitting separated components to mix and to thereby glow. For suitable embodiments, see EXAMPLES, below [see, also, e.g., containers described in U.S. Patent Nos. 3,539,794 and 5,171,081].

Other embodiments contemplated herein, include those in which a fluid is ejected as a spray or jet and is rendered bioluminescent prior to ejection from the device, such as a toy or fountain. In general, the methods will involve addition of the bioluminescence generating system components to the water just prior to ejection thereby causing the ejected spray or jet or stream to glow. Various apparatus for accomplishing this are provided herein. In light of the disclosure herein other apparatus can be adapted for such use. Examples include chambers within a toy that inject the components into a water chamber just prior to ejection of the water, or a clip-on device housing the components, perhaps in pre-measured amounts, which is attached to the toy and manually or automatically engaged to inject the ingredients into a water chamber. Similarly,

-60-

the water can be introduced into a chamber containing the components and then ejected.

In other embodiments, the components may be packaged as separate compositions, that, upon mixing, glow. For example, a composition containing
5 luciferase may be provided separately from, and for use with, an a separate composition containing a bioluminescence substrate and bioluminescence activator. In another instance, luciferase and luciferin compositions may be separately provided and the bioluminescence activator may be added after, or simultaneously with, mixing of the other two compositions.

10 Similarly, the luciferase and bioluminescence substrate may be provided in a single packaging apparatus, an composition that is a mixture, suspension, solution, powder, paste or other suitable composition, that is designed to exclude the necessary bioluminescence activator. Upon addition of the bioluminescence activator to the remaining components or upon addition of the
15 components to the bioluminesce activator, the reaction commences and the mixture glows. One example of such a system is "fairy dust". In this embodiment the luciferase and bioluminescence substrate, for example, are packaged to exclude water and/or air, the bioluminescence activator. Release of the components from the packaging into the air and/or moisture in the air
20 activates the components thereby generating luminescence. Another example is packaging the luciferase and substrate in the cap apparatus of a vessel, such that operation of the cap apparatus releases the components into the composition contained in the vessel, causing it to glow.

25 1. **Dispensing and Packaging Apparatus for Combination with the Bioluminescence generating system Components**

In one aspect, the bioluminescent apparatus systems provided herein are bioluminescence [or bioluminescent] systems in combination with dispensing or packaging apparatus. The bioluminescence systems, described in detail elsewhere herein, include three components: a bioluminescence substrate [e.g.,
30 a luciferin], a luciferase [e.g., a luciferase or photoprotein], and a bioluminescence activator or activators [e.g., molecular oxygen or Ca^{2+}]. The dispensing and packaging apparatus are configured to keep at least one of the

-61-

three components separate from the other two components, until generation of bioluminescence is desired.

In general, the dispensing and packaging apparatus are non-reactive with the bioluminescence generating system components contained therein and can
5 exclude moisture, air or other activators, such as O_2 or Ca^{2+} , or in some manner keep all necessary components that are required for the bioluminescent reaction to come into contact until desired.

It will be appreciated, however, that specific applications and configurations of the bioluminescence systems may require specific apparatus.

10 Following are exemplary descriptions of various dispensers and packages contemplated for use herein. These are offered as examples only and are in no way intended as limiting. It is understood that in light of the description herein, other apparatus may be modified or devised, that would be suitable for use to produce bioluminescence in combination with novelty items.

15 2. **Capsules, pellets, liposomes, endosomes, vacuoles, micronized particles**

Certain embodiments of the novelty item combinations provided herein require sequestering of the components from the environment prior to use or require the components to be provided in particulate form. Examples of such
20 embodiments include beverages, foods and particles, such as for use as fairy dust or in toy guns, fountains of particles and other such applications. In particular, embodiments in which the bioluminescence generating system is manufactured as part of food or beverage producing glowing beverages or foods require specific packaging considerations. To be amenable to use as an additive
25 to beverages for human consumption, the packaging must be non-toxic, and should be easy to open to provide for contact of the bioluminescence generating system components with the beverage. Examples of suitable packaging for such use include encapsulating the bioluminescence generating system components in one or micro- [up to about 100 μm in size] or macroparticles
30 [larger than 100 μm] of material that permits release of the contents, such as by diffusion or by dissolution of the encapsulating material. Liposomes and other encapsulating vehicles [see, e.g., U.S. Patent No. 4,525,306, which describes encapsulation of compounds in gelatin; U.S. Patent Nos. 4,021,364,

-62-

4,225,581, 4,269,821, 4,322,311, 4,324,683, 4,329,332, 4,525,306, 4,963,368 describe encapsulation of biologically active materials in various polymers] known to those of skill in the art, including those discussed herein and known to those of skill in the art [such as soluble paper, see U.S. Patent
5 No. 3,859,125]. Likewise, packaging of the system components for addition to food products must address the same considerations. The components may be added to the food substance directly, e.g., by sprinkling the dried and powdered ingredients onto the food, or indirectly, e.g., via addition, to the food, of a capsule containing the ingredients.

10 a. Encapsulating vehicles in general

 All components of the bioluminescence generating system, except for the oxygen or water or Ca^{2+} , depending upon the selected system can be incorporated into encapsulating material, such as liposomes, that protect the contents from the environment until placed into conditions that cause release of
15 the contents into the environment. Encapsulating material contemplated for use herein includes liposomes and other such materials used for encapsulating chemicals, such as drug delivery vehicles.

 b. Encapsulating vehicles - liposomes

 For example, liposomes that dissolve and slowly release the components
20 into the selected beverage, which contains dissolved oxygen or Ca^{2+} or even ATP for the luciferase system are contemplated herein. They can be formulated in compositions, such as solutions, suspensions, gels, lotions, creams, and ointments. Liposomes and other slow release encapsulating compositions are well known and can be adapted for use in for slow release delivery of
25 bioluminescence generating components. Typically the luciferin and luciferase will be encapsulated in the absence of oxygen or Ca^{2+} or ATP or other activating component. Upon release into the environment or medium containing this component at a suitable concentration, the reaction will proceed and a glow will be produced. Generally the concentrations of encapsulated components
30 should be relatively high, perhaps 0.1 - 1 mg/ml or more, to ensure high enough local concentrations upon release to be visible.

-63-

Liposomes or other sustained release delivery system that are formulated in an ointment or sustained release topical vehicle, for example, would be suitable for use in a body paint, lotion. Those formulated as a suspension would be useful as a spray. Numerous ointments and suitable liposome formulations are known [see, e.g., Liposome Technology, Targeted Drug Delivery and Biological Interaction, vol. III, G. Gregoriadis ed., CRC Press, Inc., 1984; U.S. Patent Nos. 5,470,881; 5,366,881; 5,296,231; 5,272,079; 5,225,212; 5,190,762; 5,188,837; 5,188,837; 4,921,757; 4,522,811]. For example, an appropriate ointment vehicle would contain petrolatum, mineral oil and/or anhydrous liquid lanolin. Sustained release vehicles such as liposomes, membrane or contact lens delivery systems, or gel-forming plastic polymers would also be suitable delivery vehicles. Liposomes for topical delivery are well known [see, e.g., U.S. Patent No. 5,296,231; Mezei et al. (1980) "Liposomes -A selective drug delivery system for the topical route of administration, I. lotion dosage form" Life Sciences 26:1473-1477; Mezei et al. (1981) "Liposomes -A selective drug delivery system for the topical route of administration: gel dosage form" Journal of Pharmacy and Pharmacology 34:473-474; Gesztes et al. (1988) "Topical anaesthesia of the skin by liposome -encapsulated tetracaine" Anesthesia and Analgesia 67:1079-1081; Patel (1985) "Liposomes as a controlled-release system", Biochemical Soc. Trans. 13:513-516; Wohlrab et al. (1987) "Penetration kinetics of liposomal hydrocortisone in human skin" Dermatologica 174:18-22].

Liposomes are microcapsules [diameters typically on the order of less than 0.1 to 20 μ m] that contain selected mixtures and can slowly release their contents in a sustained release fashion. Liposomes or other capsule, particularly a time release coating, that dissolve upon exposure to oxygen, air, moisture, visible or ultraviolet [UV] light or a particular pH or temperature [see, e.g., U.S. Patent No. 4,882,165; Kusumi et al. (1989) Chem. Lett. no.3 433-436; Koch Troels et al. (1990) Bioconjugate Chem. 4:296-304; U.S. Patent No. 5,482,719; U.S. Patent No. 5,411,730; U.S. Patent No. 4,891,043; Straubinger et al. (1983) Cell 32:1069-1079; and Straubinger et al. (1985) FEBS Ltrs. 179:148-154; and Duzgunes et al. in Chapter 11 of the book CELL

-64-

FUSION, edited by A. E. Sowers; Ellens *et al.* (1984) *Biochemistry* 23:1532-1538; Yatvin *et al.* (1987) *Methods in Enzymology* 149:77-87] may be used for example in the squirt guns or toy machine guns or fairy dust or toy cigarettes. Liposome formulations for use in baking [see, *e.g.*, U.S. Patent No. 4,999,208] are available. They release their contents when eaten or heated. Such liposomes may be suitable for incorporation into food products herein or in embodiments in which release of the components by heating is desired.

Liposomes be prepared by methods known to those of skill in the art [see, *e.g.*, Kimm *et al.* (1983) *Bioch. Bioph. Acta* 728:339-398; Assil *et al.* (1987) *Arch Ophthalmol.* 105:400; and U.S. Patent No. 4,522,811, and other citations herein and known to those of skill in the art].

Liposomes that are sensitive to low pH [see, *e.g.*, U.S. Patent No. 5,352,448, 5,296,231; 5,283,122; 5,277,913, 4,789,633] are particularly suitable for addition to bath powders or to bubble compositions, just prior to use. Upon contact with the low pH detergent or soap composition or a high pH composition, the contents of the liposome will be released. Other components, particularly Ca^+ or the presence of dissolved O_2 in the water will cause the components to glow as they are released. Temperature sensitive liposomes are also suitable for use in bath powders for release into the warm bath water.

c. Encapsulating vehicles -gelatin and polymeric vehicles

Macro or microcapsules made of gelatin or other such polymer that dissolve or release their contents in a beverage or food or on contact with air or light or changes in temperature may also be used to encapsulate components of the bioluminescence generating systems. Such microcapsules or macrocapsules may also be incorporated into solid soaps, such that as the soap dissolves the incorporated capsules or pellets release their contents, which glow upon contact with the water in which the soap is placed.

The aequorin system is particularly suitable for this application. It can be encapsulated in suspension or solution or as a paste, or other suitable form, of buffer with sufficient chelating agent, such as EDTA, to prevent discharge of the bioluminescence. Upon exposure of the capsule [microcapsule or macrocapsule] to moisture that contains Ca^{2+} , such as in a food or beverage, a

-65-

two chamber apparatus or single chamber apparatus, such as described herein, or even in a moist environment containing Ca^{2+} , the slowly released components will glow.

Thus, encapsulated bioluminescence generating components can be used
5 in combination with foods, beverages, ice and ice cubes (and other geometries of ice), as bullets or pellets, such as "fairy dust" (pellets that dissolve upon exposure to light and thereby release the luciferase/luciferin, such as the *Renilla* system, which will light upon exposure to air), and other such items.

Other encapsulating containers or vehicles for use with the
10 bioluminescence systems are those that dissolve sufficiently in water to release their contents, or that are readily opened when squeezed in the hand or from which the contents diffuse when mixed with a aqueous mixture. These containers can be made to exclude water, so that the bioluminescence generating system components may be desiccated and placed therein. Upon
15 exposure to water, such as in an aqueous composition or in the atmosphere, the vehicle dissolves or otherwise releases the contents, and the components react and glow. Similarly, some portion including less than all of the bioluminescence generating reagents may be provided in pellet form or as a concentrated paste. For example, the component(s) may be mixed with gelatin or similar hardening
20 agent, poured into a mold, if necessary and dried to produce a water soluble pellet.

The capsules, encapsulating containers or vehicles may be formed from gelatin or similar water soluble material. If the packaging is to be added to food or beverage, then it should be chosen to be non-toxic, non-reactive and
25 flavorless. To be readily opened by hand, the packaging may be constructed of thin plastic or may be configured in two halves which form an airtight seal when joined but which are readily separated when release of the components is desired.

In one aspect, these capsular embodiments of the packaging apparatus is
30 contemplated for use as an additive to beverages, creams, sauces, gelatins or other liquids or semi-solids. In another aspect, it is contemplated that the contents of the packaging apparatus is released into the air whereby it glows

-66-

upon contact with the moisture of the atmosphere and/or with molecular oxygen.

d. Endosomes and vacuoles

Vehicles may be produced using endosomes or vacuoles from
5 recombinant host cells in which the luciferase is expressed using method known to those of skill in the art [see, e.g., U.S. Patent Nos. 5,284,646, 5,342,607, 5,352,432, 5,484,589, 5,192,679, 5,206,161, and 5,360,726]. For example, aequorin that is produced by expression in a host, such as *E. coli*, can be isolated within vesicles, such as endosomes or vacuoles, after protein
10 synthesis. Using routine methods the cells are lysed and the vesicles are released with their contents intact. The vesicles will serve as delivery vehicles. When used they will be charged with a luciferin, such as a coelenterazine, and dissolved oxygen, such as by diffusion, under pressure, or other appropriate means.

15 e. Micronized particles

The bioluminescence generating system components that are suitable for lyophilization, such as the aequorin photoprotein, the *Renilla* system, and the *Vargula* systems, can be micronized to form fine powder and stored under desiccating conditions, such as with a desiccant. When used the fine powder
20 can be combined with the selected article of manufacture, such as a personal item, a chamber in a gun or fountain, or used as fairy dust. Contact with dissolved oxygen or Ca^{2+} in the air or in a mist that can be supplied or in added will cause the particles to release their contents and glow.

3. Apparatus and substrates

25 The combinations herein are produced by combining a selected novelty item and combining it with a system and apparatus for producing bioluminescence. Selection of the system depends upon factors such as the desired color and duration of the bioluminescence desired as well as the particular item. Selection of the apparatus primarily depends upon the item with
30 which it is combined.

Among the simplest embodiments herein, are those in which the apparatus contains a single chamber [vessel] or matrix material and, if needed,

-67-

ejection means. Components, generally all but at least one necessary component, typically the activator as defined herein, of the bioluminescence reaction are introduced into the housing or vessel or onto the substrate as a mixture in liquid phase or as a powder or other paste or other convenient composition. Prior to use the final component(s) is added or the other components are contacted with the final component(s).

a. Matrix materials

For preparation of combinations of articles of manufacture such as clothing, paper, items fabricated from a textile, plastic, glass, ceramic or other such material, such as a figurine, and for use in the cartridges, at least one component of the bioluminescence generating system is linked to the matrix substrate. When desired, a mixture or mixtures(s) containing the remaining component(s), typically a liquid mixture is applied, as by pouring or spraying onto the matrix substrate, to produce a glow. For example, the aequorin photoprotein, including coelenterazine and oxygen, is linked to the substrate. When desired a liquid containing Ca^{2+} , such as tap water or, preferably, a liquid mixture containing the Ca^{2+} in an appropriate buffer, is contacted, such as by spraying, with the matrix with linked luciferase. Upon contacting the material glows.

In other embodiments, the luciferase, such as a *Vargula* luciferase, is linked to the substrate material, and contacted with a liquid mixture containing the luciferin in an appropriate buffer. Contacting can be effected by spraying or pouring or other suitable manner. The matrix material is incorporated into, onto or is formed into an article of manufacture, such as clothing or a ceramic, glass, plastic figurine, toy, balloon, flocking agent, such as a christmas tree flocking agent, or other item. The resulting novelty item can be sold as a kit with a container of the mixture containing the non-linked components, such as in a canister, spray bottle or can, or other suitable format.

The kits may also include containers containing compositions of the linked components which can be provided in a form, such as sprayed on as a liquid and air dried, that can be applied to the substrate so that the item can be made to glow again. Thus, kits containing a substrate, such as clothing or a

-68-

plastic, ceramic or glass item, and a first composition containing a luciferase or a luciferin or both and luciferin, and a second composition containing the remaining components. The item as provided in the kit can be charged with the first composition, such as having the composition applied and dried, or may
5 require charging prior to the first use. Alternatively, the item may be sprayed with both compositions when desired to produce a glow.

It is understood that the precise components and optimal means for application or storage are a function of the selected bioluminescence system. The concentrations of the components, which can be determined empirically,
10 are not critical, but must be sufficient to produce a visible glow when combined. Typical concentrations are as low as nanomoles/l, preferably on the order of mg/l or higher. The concentration on the substrate is that produced when a composition containing such typical concentration is applied to the material. Again, such ideal concentrations can be readily determined empirically
15 by applying the first composition, letting it dry, spraying the second composition, and observing the result.

The matrix material substrates contemplated herein are generally insoluble materials used to immobilize ligands and other molecules, and are those that used in many chemical syntheses and separations. Such substrates,
20 also called matrices, are used, for example, in affinity chromatography, in the immobilization of biologically active materials, and during chemical syntheses of biomolecules, including proteins, amino acids and other organic molecules and polymers. The preparation of and use of matrices is well known to those of skill in this art; there are many such materials and preparations thereof known. For
25 example, naturally-occurring matrix materials, such as agarose and cellulose, may be isolated from their respective sources, and processed according to known protocols, and synthetic materials may be prepared in accord with known protocols.

The substrate matrices are typically insoluble materials that are solid,
30 porous, deformable, or hard, and have any required structure and geometry, including, but not limited to: beads, pellets, disks, capillaries, hollow fibers, needles, solid fibers, random shapes, thin films and membranes. Thus, the item

-69-

may be fabricated from the matrix material or combined with it, such by coating all or part of the surface or impregnating particles.

Typically, when the matrix is particulate, the particles are at least about 10-2000 μ M, but may be smaller or larger, depending upon the selected application. Selection of the matrices will be governed, at least in part, by their physical and chemical properties, such as solubility, functional groups, mechanical stability, surface area swelling propensity, hydrophobic or hydrophilic properties and intended use.

If necessary the support matrix material can be treated to contain an appropriate reactive moiety or in some cases the may be obtained commercially already containing the reactive moiety, and may thereby serve as the matrix support upon which molecules are linked. Materials containing reactive surface moieties such as amino silane linkages, hydroxyl linkages or carboxysilane linkages may be produced by well established surface chemistry techniques involving silanization reactions, or the like. Examples of these materials are those having surface silicon oxide moieties, covalently linked to gamma-aminopropylsilane, and other organic moieties; N-[3-(triethoxysilyl)propyl]phthelamic acid; and bis-(2-hydroxyethyl)aminopropyltriethoxysilane. Exemplary of readily available materials containing amino group reactive functionalities, include, but are not limited to, para-aminophenyltriethoxysilane. Also derivatized polystyrenes and other such polymers are well known and readily available to those of skill in this art [e.g., the Tentagel® Resins are available with a multitude of functional groups, and are sold by Rapp Polymere, Tubingen, Germany; see, U.S. Patent No. 4,908,405 and U.S. Patent No. 5,292,814; see, also Butz *et al.* (1994) *Peptide Res.* 7:20-23; Kleine *et al.* (1994) *Immunobiol.* 190:53-66].

These matrix materials include any material that can act as a support matrix for attachment of the molecules of interest. Such materials are known to those of skill in this art, and include those that are used as a support matrix. These materials include, but are not limited to, inorganics, natural polymers, and synthetic polymers, including, but are not limited to: cellulose, cellulose derivatives, acrylic resins, glass, silica gels, polystyrene, gelatin, polyvinyl pyrrolidone, co-polymers of vinyl and acrylamide, polystyrene cross-linked with

-70-

divinylbenzene or the like [see, Merrifield (1964) *Biochemistry* **3**:1385-1390], polyacrylamides, latex gels, polystyrene, dextran, polyacrylamides, rubber, silicon, plastics, nitrocellulose, celluloses, natural sponges. Of particular interest herein, are highly porous glasses [see, e.g., U.S. Patent No.

5 4,244,721] and others prepared by mixing a borosilicate, alcohol and water.

Synthetic matrices include, but are not limited to: acrylamides, dextran-derivatives and dextran co-polymers, agarose-polyacrylamide blends, other polymers and co-polymers with various functional groups, methacrylate derivatives and co-polymers, polystyrene and polystyrene copolymers [see, e.g.,

10 Merrifield (1964) *Biochemistry* **3**:1385-1390; Berg et al. (1990) in Innovation Perspect. Solid Phase Synth. Collect. Pap., Int.

Symp., 1st, Epton, Roger (Ed), pp. 453-459; Berg et al. (1989) in Pept., Proc. Eur. Pept. Symp., 20th, Jung, G. et al. (Eds), pp. 196-198; Berg et al. (1989) J. Am. Chem. Soc. **111**:8024-8026; Kent et al. (1979) Isr. J. Chem. **17**:243-247;

15 Kent et al. (1978) J. Org. Chem. **43**:2845-2852; Mitchell et al. (1976) Tetrahedron Lett. **42**:3795-3798; U.S. Patent No. 4,507,230; U.S. Patent No. 4,006,117; and U.S. Patent No. 5,389,449]. Methods for preparation of such matrices are well-known to those of skill in this art.

Synthetic matrices include those made from polymers and co-polymers
20 such as polyvinylalcohols, acrylates and acrylic acids such as poly-ethylene-co-acrylic acid, polyethylene-co-methacrylic acid, polyethylene-co-ethylacrylate, polyethylene-co-methyl acrylate, polypropylene-co-acrylic acid, polypropylene-co-methyl-acrylic acid, polypropylene-co-ethylacrylate, polypropylene-co-methyl acrylate, polyethylene-co-vinyl acetate, poly-
25 propylene-co-vinyl acetate, and those containing acid anhydride groups such as polyethylene-co-maleic anhydride, polypropylene-co-maleic anhydride and the like. Liposomes have also been used as solid supports for affinity purifications [Powell et al. (1989) Biotechnol. Bioeng. **33**:173].

For example, U.S. Patent No. 5,403,750, describes the preparation of
30 polyurethane-based polymers. U.S. Pat. No. 4,241,537 describes a plant growth medium containing a hydrophilic polyurethane gel composition prepared from chain-extended polyols; random copolymerization is preferred with up to

-71-

50% propylene oxide units so that the prepolymer will be a liquid at room temperature. U.S. Pat. No. 3,939,123 describes lightly crosslinked polyurethane polymers of isocyanate terminated prepolymers containing poly(ethyleneoxy) glycols with up to 35% of a poly(propyleneoxy) glycol or a poly(butyleneoxy) glycol. In producing these polymers, an organic polyamine is used as a crosslinking agent. Other matrices and preparation thereof are described in U.S. Patent Nos. 4,177,038, 4,175,183, 4,439,585, 4,485,227, 4,569,981, 5,092,992, 5,334,640, 5,328,603

U.S. Patent No. 4,162,355 describes a polymer suitable for use in affinity chromatography, which is a polymer of an aminimide and a vinyl compound having at least one pendant halo-methyl group. An amine ligand, which affords sites for binding in affinity chromatography is coupled to the polymer by reaction with a portion of the pendant halo-methyl groups and the remainder of the pendant halo-methyl groups are reacted with an amine containing a pendant hydrophilic group. A method of coating a substrate with this polymer is also described. An exemplary aminimide is 1,1-dimethyl-1-(2-hydroxyoctyl)amine. methacrylimide and vinyl compound is a chloromethyl styrene.

U.S. Patent No. 4,171,412 describes specific matrices based on hydrophilic polymeric gels, preferably of a macroporous character, which carry covalently bonded D-amino acids or peptides that contain D-amino acid units. The basic support is prepared by copolymerization of hydroxyalkyl esters or hydroxyalkylamides of acrylic and methacrylic acid with crosslinking acrylate or methacrylate comonomers are modified by the reaction with diamines, aminoacids or dicarboxylic acids and the resulting carboxyterminal or aminoterminal groups are condensed with D-analogs of aminoacids or peptides. The peptide containing D-aminoacids also can be synthesized stepwise on the surface of the carrier. For example, U.S. Patent No. 4,178,439 describes a cationic ion exchanger and a method for preparation thereof. U.S. Patent No. 4,180,524 describes chemical syntheses on a silica support.

-72-

Immobilized Artificial Membranes [IAMs; see, e.g., U.S. Patent Nos. 4,931,498 and 4,927,879] may also be used. IAMs mimic cell membrane environments and may be used to bind molecules that preferentially associate with cell membranes [see, e.g., Pidgeon et al. (1990) Enzyme Microb. Technol. 12:149]. These materials are also used for preparing articles of manufacture, such as toys, balloons, figurines, sponges, knick-knacks, key chains, clothing, translucent or transparent soaps, preferably mild soaps, and other items, and thus are amenable to linkage of molecules, either the luciferase, luciferin, mixtures thereof.

10 For example, matrix particles may be impregnated into items that will then be contacted with an activator. For example, matrix particles with linked luciferin, preferably a luciferin/luciferase complex, such as the aequorin photoprotein is incorporated into a transparent or translucent soaps [see, e.g., U.S. Patent Nos. 4,081,394, 5,183,429, and 5,141,664, and United Kingdom
15 Patent No. GB 2,235,931A], preferably a mild soap. Upon contacting the soap with water matrix particles near the surface will glow.

Kits containing the item including the matrix material with or without the coating of the bioluminescence generating components, and compositions containing the remaining components are provided.

20 b. Immobilization and activation

Numerous methods have been developed for the immobilization of proteins and other biomolecules onto solid or liquid supports [see, e.g., Mosbach (1976) Methods in Enzymology 44; Weetall (1975) Immobilized Enzymes, Antigens, Antibodies, and Peptides; and Kennedy et al. (1983) Solid
25 Phase Biochemistry, Analytical and Synthetic Aspects, Scouten, ed., pp. 253-391; see, generally, Affinity Techniques. Enzyme Purification: Part B. Methods in Enzymology, Vol. 34, ed. W. B. Jakoby, M. Wilchek, Acad. Press, N.Y. (1974); Immobilized Biochemicals and Affinity Chromatography, Advances
in Experimental Medicine and Biology, vol. 42, ed. R. Dunlap, Plenum Press,
30 N.Y. (1974)].

Among the most commonly used methods are absorption and adsorption or covalent binding to the support, either directly or via a linker, such as the

-73-

- numerous disulfide linkages, thioether bonds, hindered disulfide bonds, and covalent bonds between free reactive groups, such as amine and thiol groups, known to those of skill in art [see, e.g., the PIERCE CATALOG, ImmunoTechnology Catalog & Handbook, 1992-1993, which describes the preparation of and use of such reagents and provides a commercial source for such reagents; and Wong (1993) Chemistry of Protein Conjugation and Cross Linking, CRC Press; see, also DeWitt et al. (1993) Proc. Natl. Acad. Sci. U.S.A. 90:6909; Zuckermann et al. (1992) J. Am. Chem. Soc. 114:10646; Kurth et al. (1994) J. Am. Chem. Soc. 116:2661; Ellman et al. (1994) Proc. Natl. Acad. Sci. U.S.A. 91:4708; Sucholeiki (1994) Tetrahedron Ltrrs. 35:7307; and Su-Sun Wang (1976) J. Org. Chem. 41:3258; Padwa et al. (1971) J. Org. Chem. 41:3550 and Vedejs et al. (1984) J. Org. Chem. 49:575, which describe photosensitive linkers]

- To effect immobilization, a composition containing the protein or other biomolecule is contacted with a support material such as alumina, carbon, an ion-exchange resin, cellulose, glass or a ceramic. Fluorocarbon polymers have been used as supports to which biomolecules have been attached by adsorption [see, U.S. Pat. No. 3,843,443; Published International PCT Application WO/86 03840].

- A large variety of methods are known for attaching biological molecules, including proteins and nucleic acids, molecules to solid supports [see, e.g., U.S. Patent No. 5451683]. For example, U.S. Pat. No. 4,681,870 describes a method for introducing free amino or carboxyl groups onto a silica matrix. These groups may subsequently be covalently linked to other groups, such as a protein or other anti-ligand, in the presence of a carbodiimide. Alternatively, a silica matrix may be activated by treatment with a cyanogen halide under alkaline conditions. The anti-ligand is covalently attached to the surface upon addition to the activated surface. Another method involves modification of a polymer surface through the successive application of multiple layers of biotin, avidin and extenders [see, e.g., U.S. Patent No. 4,282,287]; other methods involve photoactivation in which a polypeptide chain is attached to a solid substrate by incorporating a light-sensitive unnatural amino acid group into the

-74-

polypeptide chain and exposing the product to low-energy ultraviolet light [see, e.g., U.S. Patent No. 4,762,881]. Oligonucleotides have also been attached using a photochemically active reagents, such as a psoralen compound, and a coupling agent, which attaches the photoreagent to the substrate [see, e.g.,
5 U.S. Patent No. 4,542,102 and U.S. Patent No. 4,562,157]. Photoactivation of the photoreagent binds a nucleic acid molecule to the substrate to give a surface-bound probe.

Covalent binding of the protein or other biomolecule or organic molecule or biological particle to chemically activated solid matrix supports such as glass,
10 synthetic polymers, and cross-linked polysaccharides is a more frequently used immobilization technique. The molecule or biological particle may be directly linked to the matrix support or linked via linker, such as a metal [see, e.g., U.S. Patent No. 4,179,402; and Smith *et al.* (1992) Methods: A Companion to Methods in Enz. 4:73-78]. An example of this method is the cyanogen bromide
15 activation of polysaccharide supports, such as agarose. The use of perfluorocarbon polymer-based supports for enzyme immobilization and affinity chromatography is described in U.S. Pat. No. 4,885,250]. In this method the biomolecule is first modified by reaction with a perfluoroalkylating agent such as perfluorooctylpropylisocyanate described in U.S. Pat. No. 4,954,444. Then, the
20 modified protein is adsorbed onto the fluorocarbon support to effect immobilization.

The activation and use of matrices are well known and may be effected by any such known methods [see, e.g., Hermanson *et al.* (1992) Immobilized Affinity Ligand Techniques, Academic Press, Inc., San Diego]. For example, the
25 coupling of the amino acids may be accomplished by techniques familiar to those in the art and provided, for example, in Stewart and Young, 1984, Solid Phase Synthesis, Second Edition, Pierce Chemical Co., Rockford].

Other suitable methods for linking molecules to solid supports are well known to those of skill in this art [see, e.g., U.S. Patent No. 5,416,193].
30 These include linkers that are suitable for chemically linking molecules, such as proteins, to supports and include, but are not limited to, disulfide bonds, thioether bonds, hindered disulfide bonds, and covalent bonds between free

-75-

reactive groups, such as amine and thiol groups. These bonds can be produced using heterobifunctional reagents to produce reactive thiol groups on one or both of the moieties and then reacting the thiol groups on one moiety with reactive thiol groups or amine groups to which reactive maleimido groups or thiol groups can be attached on the other. Other linkers include, acid cleavable linkers, such as bismaleimideoxy propane, acid labile-transferrin conjugates and adipic acid dihydrazide, that would be cleaved in more acidic intracellular compartments; cross linkers that are cleaved upon exposure to UV or visible light and linkers, such as the various domains, such as C_H1, C_H2, and C_H3, from the constant region of human IgG₁ (see, Batra *et al.* (1993) Molecular Immunol. 30:379-386). Presently preferred linkages are direct linkages effected by adsorbing the molecule to the surface of the matrix. Other linkages are photocleavable linkages that can be activated by exposure to light [see, *e.g.*, Goldmacher *et al.* (1992) Bioconj. Chem. 3:104-107, which linkers are herein incorporated by reference]. The photocleavable linker is selected such that the cleaving wavelength that does not damage linked moieties. Photocleavable linkers are linkers that are cleaved upon exposure to light [see, *e.g.*, Hazum *et al.* (1981) in Pept., Proc. Eur. Pept. Symp., 16th, Brunfeldt, K (Ed), pp. 105-110, which describes the use of a nitrobenzyl group as a photocleavable protective group for cysteine; Yen *et al.* (1989) Makromol. Chem 190:69-82, which describes water soluble photocleavable copolymers, including hydroxypropylmethacrylamide copolymer, glycine copolymer, fluorescein copolymer and methylrhodamine copolymer; Goldmacher *et al.* (1992) Bioconj. Chem. 3:104-107, which describes a cross-linker and reagent that undergoes photolytic degradation upon exposure to near UV light (350 nm); and Senter *et al.* (1985) Photochem. Photobiol 42:231-237, which describes nitrobenzyloxycarbonyl chloride cross linking reagents that produce photocleavable linkages]. The selected linker will depend upon the particular application and, if needed, may be empirically selected.

-76-

Aequorin that is designed for conjugation and conjugates containing such aequorin have been produced [see, e.g., International PCT application No. WO 94/18342; see, also Smith et al. (1995) in American Biotechnology Laboratory]. *Vargula* luciferase has also been linked to other molecules [see, e.g., Japanese application No. JP 5064583, March 19, 1993]. Such methods may be adapted for use herein to produce aequorin coupled to protein or other such molecules, which are linked to the selected matrix. Finally, as an alternative, a component of the bioluminescence generating system may be modified for linkage, such as by addition of amino acid residues that are particularly suitable for linkage to the selected substrate. This can be readily effected by modifying the DNA and expressing such modified DNA to produce luciferase with additional residues at the N- or C-terminus.

4. Apparatus containing a single chamber, housing or a vessel

Examples of vessels include beverage containers, plates or other dishes, vases, jars, balloons, bottles and other containers.

Single chamber housings or vessels will include single chamber water guns, inks, paints and other such items, in which one or more components of the bioluminescence system up to all of the components except for one of the components required for bioluminescence is included in the vessel as a mixture, powder or suspension of particles. The remaining component(s) is(are) introduced just prior to use. Thus, for example, for a squirt gun or a balloon or other such item, the items can be packaged with a powder in the chamber or inside the item, or a powder or other composition can be added, and then water is added. Alternatively, the luciferase, such as *Renilla*, *Vargula*, and firefly luciferase, can be linked to the surface of the item and water added. Depending upon the bioluminescence generating system selected the water can be tap water or water that contains the additional component, such as dissolved oxygen, or Ca^{2+} or ATP, or other suitable composition, and/or appropriate luciferin/bioluminescence substrate. Similarly, the luciferase/ luciferase can be linked to the surface of the item in association with the appropriate luciferin/bioluminescence substrate, such that addition of activator alone generates luminescence.

-77-

For inks or paints or other such compositions, the components are suspended in the ink or paint, and then the final component(s) is(are) added. Alternatively, pellets containing components of the bioluminescence generating system, such as the *Renilla* or *Aequorin* system can be added to an ink or paint
5 or other such liquid item, and as the pellet dissolves or the contents diffuse out, the item will glow.

Kits containing the item and the bioluminescence generating systems are also provided herein. The kits typically include a beverage container, ballon or bottle and, may also contain, the buffer compositions and other ingredients
10 required for the bioluminescence reaction, as well as instructions for use. The kits may also include the cartridges for recharging or reloading the item.

5. Dual and multiple chamber fluid dispensing apparatus

An example of a dispensing apparatus contemplated for use herein is a dual chamber fluid dispensing apparatus. In general, this apparatus has two
15 chambers thereby maintaining at least one of the bioluminescence generating system components separate from the remaining components until illumination is desired. This apparatus may include a mixing chamber to permit mixing of the components prior to dispensing from the apparatus. Further, the apparatus may be used with fluid or semi-fluid bioluminescence systems; for example,
20 water based compositions or cream/lotion systems.

a. Mechanical pump dispensing apparatus

Another embodiment of a dual chamber fluid dispensing apparatus employs a mechanical pump mechanism in its operation. In this embodiment, the dispensing apparatus maintains at least one of the components of the
25 bioluminescence reaction, such as the substrate, luciferase or activator, in separate chambers. A pump mechanism operates to withdraw the contents from each chamber and into a mixing chamber. Within the mixing chamber and upon ejection, the mixed composition is activated, for example by the oxygen in the air or by reaction of the components that were in one chamber, and glows.
30 The pump mechanism may be manually operated, for example by pulling the trigger of a toy squirt gun, or it may be mechanically operated, for example by a motor which operates the pumping mechanism.

-78-

b. Gas-charged dispensing apparatus

Another example of a dual chamber fluid dispensing apparatus is one that uses CO₂ or, preferably a mixture gases containing O₂, or other gas, to propel the components of the bioluminescence system, such as the
5 bioluminescence substrate and luciferase into a mixing chamber where they combine before being ejected through a dispensing nozzle. In such a dispensing apparatus, upon mixing of the contents in the mixing chamber the contents will glow.

These apparatus may be configured as, for example, a toy gun, toy
10 cannon or other toy weapon, a can for shaving cream or other glowing foam, a decorative fountain or volcano or almost any fluid squirting or spouting device. A volcano shaped dispensing apparatus may be used, for example, as a substitute for conventional, similarly shaped fireworks displays.

Almost any bioluminescence generating system may be selected for use
15 with the dual chamber fluid dispensing apparatus. If air is the bioluminescence activator, then the contents glow after mixing and upon ejection from the dispensing apparatus. Alternatively, the bioluminescent activator may be contained in one of the two chambers along with either the luciferase or bioluminescence substrate, or it may be located in a third chamber that is also
20 connected to the mixing chamber. Thus, as with all the combinations described herein, the critical aspect of these dispensing apparatus is that at least one of the bioluminescence generating system components be maintained separate from the other components until reaction is desired.

c. Compressible dispensing apparatus

25 Another embodiment of a dual chamber fluid dispensing apparatus contemplated for use herein takes the form of a compressible bottle or tube. The bottle has two compartments within it that keep at least two of the bioluminescence generating system components separated. The cap of the bottle can serve as a mixing chamber or a mixing chamber may be positioned
30 between the two chambers and the cap. The bioluminescence generating system components are forced by compression from the bottle into the mixing chamber. They are then dispensed from the mixing chamber. For example, the

-79-

mixed contents may be removed from the bottle by attaching a plunger/syringe apparatus to the dispensing end and withdrawing the contents therethrough.

Such compressible bottle or tube is particularly useful for dispensing bioluminescent body creams, gels or lotions, finger paints, dentifrices, 5 shampoos, hair gels, cosmetics and other viscous fluids and semi-solids. The bottle or tube is preferably constructed of plastic, plastic/metal laminate or similar collapsible composite to avoid formation of a vacuum within the container as its contents are expelled. See, for example, U.S. Patent No. 4,687,663, which describes a dual chambered tube for use with dentifrices and 10 which, as all cited patents and publications herein, is incorporated herein in its entirety. This tube may be adapted for use in combination with the bioluminescence generating systems provided herein. Other tubes and vessels that have dual chambers, such as those used to keep components of the final product separate until use, may be used herein [see, e.g., U.S. Patent Nos. 15 5,405,056, 4,676,406, 4,438,869, 5,059,417, 4,528,180, 4,849,213, 4,895,721, 5,085,853, see, esp. 5,038,963]

6. Other fluid dispensing and packaging apparatus particularly designed for single use

Additional embodiments of the dispensing and packaging apparatus 20 contemplated for use herein include fluid packaging apparatus, designed for use with bioluminescent fluids. These apparatus maintain at least one of the bioluminescence generating system components separate from the remaining components until illumination is desired. Unlike the dual chamber fluid dispensing apparatus, however, these apparatus result in illumination of the 25 entire contents of the package and therefore are typically intended for a single use applications. They can, however, be recharged by adding additional substrate, luciferase or other exhausted component.

a. Bottle-type single chamber container/bladder apparatus

One example of a fluid packaging apparatus, contemplated for use 30 herein, is a bottle shaped device having a bladder within it that contains at least one of the bioluminescence generating system components. A piercing pin or other means for rupturing the bladder is also located within the bottle. When the bladder is ruptured, within the bottle, its contents mix with the contents of

-80-

the bottle and the resulting mixture becomes illuminated or glows upon contact with an activator, such as air.

Because the bioluminescence generating system components are mixed within the entire bottle, those contents must be used shortly after mixing.

- 5 Thus, this type of packaging is particularly suitable for use with bioluminescence systems that are consumed in a single use or activity such as bubble-blowing.

b. Dual chambered bottle type container/bladder apparatus for use with foods and beverages

- 10 Another example of a fluid packaging apparatus provided herein is a single use, dual chambered bottle. This apparatus is configured with a membrane between the two chambers. One chamber is designed to readily collapse against the other chamber thereby rupturing the membrane which divides the chambers. The contents of the two chambers then mix, resulting in
15 illumination of the fluids. Alternatively, instead of a membrane separation means, a one-way valve may be situated between the two chambers. Such a single use, dual chamber apparatus is particularly suitable for use with bubble-making compositions, beverages, single use amounts of shampoos, soaps, creams or lotions, or similar substances.

- 20 **c. Can type container/bladder apparatus for use with foods and beverages**

- Another example of a fluid packaging apparatus, which is amenable to use with bioluminescent food or beverage, is a container/bladder combination. In one embodiment, the container is configured like a pop-top can, such as a
25 soda can. A bladder, containing at least one of the bioluminescence generating system components, is positioned under the top of the can. Within the can is a beverage that contains the remaining bioluminescence generating system components. Upon opening the can, the bladder is punctured and its contents mixed with the rest of the contents of the can; thereby illuminating the
30 beverage. Preferably, the container is clear, so that the illumination will be almost immediately visible. Other pop top cans that can be modified for use herein are known [see, e.g., U.S. Patent No. 5,397,014].

-83-

7. Cap Apparatus for use a single chamber vessel

Another example of a packaging apparatus contemplated herein is a cap apparatus for use with a vessel. In this embodiment, one or more of the bioluminescence generating system components, up to all but one component, is [are] within the cap of the vessel and the remaining components are contained in the vessel. Upon operation of the cap apparatus, the bioluminescence generating system components are added to the composition in the vessel and the composition glows. Preferably the vessel is translucent to the bioluminescence; however, the glowing composition may be dispensed from the vessel.

Generally, the cap is configured with a pocket within it which opens to the bottom of the cap. For example, the bottom of the cap can be U-shaped, curving into the cap and thereby forming the pocket. The cap apparatus contains a capsule or similar package, containing one or more, up to all but one, of the bioluminescence generating system components, within the pocket in the cap. Means for deploying the bioluminescence generating system components into the vessel are attached to the cap. Such deployment means can be, for example, a plunger assembly. The cap apparatus is operated by depressing the plunger, thereby forcing the packaged components into the composition within the vessel or breaking the packaging, releasing its contents into the composition within the vessel. The package should be dissolvable in the composition or amenable to diffusion of the components contained therein or readily rupturable upon contact with the plunger assembly.

Alternatively, the packaging within the cap apparatus can be a membrane or series of membranes separating the bioluminescence generating system components from the composition within the vessel or from the composition within the vessel and from each other. In this alternative, the plunger can rupture the membrane(s) thereby permitting the bioluminescence generating system components contained therein to be released into the composition contained in the vessel. Again, upon mixture of the components with the composition, illumination ensues.

-84-

The bioluminescence generating system components contained within the cap apparatus may be in a composition, such as a solution, a powder or a suspension of particles or other form amenable to packaging within the cap apparatus that can be mixed with the composition contained within the vessel.

- 5 The cap apparatus also may be adapted with a screen or filter attached to the bottom of the cap to prevent membrane fragments from entering the vessel.

- The cap apparatus, as all the apparatus described herein that are in contact with a bioluminescence generating system component, should be non-reactive with the components and is preferably non-toxic, particularly if used with a composition intended for human consumption. The cap can be constructed of cork, for example, and situated in a wine or champagne bottle. Alternatively, the cap can be a screw-top type cap, having a plunger integral thereto, such that tightening of the screw-cap onto the top of the vessel forces the plunger against the packaged bioluminescence generating system components either rupturing the packaging or pushing it into the vessel.
- 10
- 15

E. Combinations of articles of manufacture and bioluminescence

- Combinations of articles of manufacture and bioluminescence are provided herein. By virtue of the bioluminescence the combinations are novelty items because the bioluminescence provides entertainment, amusement or recreation. Any such combination of an article of manufacture with bioluminescence that produces a novelty item (i.e., provides entertainment, amusement, or recreation) is intended herein. The combination is formed by contacting the article of manufacture or materials in the manufacture with a bioluminescence generating system or an apparatus therefore. The components of the bioluminescence generating system are manufactured as part of the item, coated thereon, impregnated therein, or added after manufacture. Alternatively, the article of manufacture is combined with an apparatus that contains or to which components of the bioluminescence generating system are added, and that produces the bioluminescence.
- 20
- 25

- 30 The bioluminescence generating systems provided herein are contemplated for use with various substances to glow the substance. For example, as discussed below, the bioluminescence generating system

-85-

components may be used to produce glowing aqueous mixtures housed in transparent portions of articles of manufacture, thereby illuminating that portion of the article of manufacture. Additionally, the bioluminescence generating system components may be used to produce glowing food or beverage products, textiles, creams, lotions, gels, soaps, bubbles, papers, powders or water. Following are brief examples of combinations of bioluminescence systems with articles of manufacture and the resulting novelty items contemplated herein.

1. **Personal care products, including bath powders, bubble baths, products for use on the nails, hair, skin, lips and elsewhere**

Personal care products can be in the form of powders, pressed powders, sprays, foams, aerosols, lotions, gels, ointments and other suitable formulations. The common element will be the combination of such items with bioluminescence generating reagents, so that before use or upon application to the body or when used the product will glow. These items include, body powders, lotions, gels, aqueous compositions and solutions, nail polishes, make-up, body paints, shaving cream and dentifrices. As described herein, the items are combined with one or more components of a bioluminescence generating system, and, when a glow is desired, the remaining components are added or combined with the other components.

a. **Bath powders**

Numerous bath powders exemplified herein, are suitable for use in combination with the bioluminescence generating systems herein. Such bath powders are preferably non-detergent with a pH close to neutral. The selected bioluminescence generating system must be selected to be active at the resulting pH. In addition, capsular delivery vehicles, such as liposomes or time release delivery vehicles, preferably microcapsules, that contain a luciferase and luciferin, such as the *Renilla*, *Vargula*, or Aequorin system, and that are pH, temperature sensitive, or that dissolve in water or that are otherwise released are preferred for use herein. In certain embodiments, there will be two types of capsules, one type containing up to all but one of the components required for the bioluminescence reaction, and the other containing the remaining components [except, if desired, for those components that will be present in the

-86-

bath water, such as Ca^{2+}). Such capsules may be components of the bath powder or may be added to a bath to give it a glow. Upon contact with the warm water or with water of a particular pH the contents of the capsule or pellet will be released, preferably over time, and will glow.

- 5 In other embodiments, there will be one type of capsule that contains the luciferase and other components. The luciferin may be included in the bath powder or added separately. Other ways in which the components may be combined will, in light of the disclosure herein, be apparent to those of skill in the art. The bath powders and bioluminescence generating reactions will be
10 provided as a combination or in a kit.

Suitable bath powders and bubble baths and other bubble compositions for use in these combinations are well known to those of skill in the art [see, e.g., U.S. Patent Nos.: 5,478,501 4,565,647; 5,478,490; 5,412,118; 5,401,773; and many other examples]. These may be modified by adding the
15 bioluminescence generating system components.

b. **Glowing dust or powder**

- Another embodiment of the combination described herein is as a glowing dust or powder substance, or a vapor, such as for use in the theatrical productions. In this embodiment, lyophilized or desiccated forms, micronized
20 powdered forms, or, a suitable composition, of up to all but one of the bioluminescence generating system components are encapsulated in readily rupturable or time release or temperature or pH or light sensitive microspheres or capsules, as described above. Preferable encapsulating agents are light or temperature sensitive so that upon exposure to the environment, the contents
25 are released from the capsules. Moisture or oxygen in the air or a spray of water on the skin with dissolved oxygen in the vicinity of the "dust" will produce a glow. The dust can be added to another powder, such as body powder, provided it is stored in an airtight container. Once the powder contacts the moisture in the air and on the wearer's skin, it glows.

-87-

Alternatively, micronized particles of lyophilized powders are packaged such in manner so that the powder remains dry. Upon exposure to moist air or to air with water droplets [such as a fog], the micronized powders will glow.

c. Lotions, gels and other topical application formulations

- 5 For application to the skin, the macro or microparticles or the luciferase, luciferin or mixture thereof, may be added to cosmetic compositions. The compositions may be provided in the form of gels, creams, lotions, solids, and other compositions, such as solutions and suspensions, aerosols or solid base or vehicle known in the art to be non-toxic and dermatologically acceptable to
- 10 which sufficient number of such particles are added under conditions in which the contents are released into the gels, creams, lotions, solids, solutions or suspensions, or aerosols, which contain either molecular oxygen and/or Ca^{2+} to react with the contents of particles. Upon application to the skin the gels, creams, lotions, solids, solutions or suspensions, or aerosols glow.

15 (1) Lotions

- The lotions contain an effective concentration of less than all reagents for one or more bioluminescence generating systems. Preferably, the reagents are encapsulated in a vehicle that releases its contents upon exposure to light or temperature, such that as the contents of the vehicle are released they react
- 20 with oxygen or Ca^{2+} in the lotion and/or on the skin. Prior to use the skin can be sprayed with a mist of water, buffer or other composition containing the requisite ions. The effective concentration is that sufficient to produce a visible glow when contacting the skin. Any emollients, as long as they do not inactivate the bioluminescent reaction, known to those of skill in the art as
- 25 suitable for application to human skin may be used. These include, but are not limited to, the following:

- (a) Hydrocarbon oils and waxes, including mineral oil, petrolatum, paraffin, ceresin, ozokerite, microcrystalline wax, polyethylene, and perhydrosqualene.
- 30 (b) Silicone oils, including dimethylpolysiloxanes, methylphenylpolysiloxanes, water-soluble and alcohol-soluble silicone-glycol copolymers.

-88-

(c) Triglyceride fats and oils, including those derived from vegetable, animal and marine sources. Examples include, but are not limited to, castor oil, safflower oil, cotton seed oil, corn oil, olive oil, cod liver oil, almond oil, avocado oil, palm oil, sesame oil, and soybean oil.

5 (d) Acetoglyceride esters, such as acetylated monoglycerides.

(e) Ethoxylated glycerides, such as ethoxylated glyceryl monstearate.

(f) Alkyl esters of fatty acids having 10 to 20 carbon atoms. Methyl, isopropyl and butyl esters of fatty acids are useful herein. Examples
10 include, but are not limited to, hexyl laurate, isohexyl laurate, isohexyl palmitate, isopropyl palmitate, isopropyl myristate, decyl oleate, isodecyl oleate, hexadecyl stearate, decyl stearate, isopropyl isostearate, diisopropyl adipate, diisohexyl adipate, dihexyldecyl adipate, diisopropyl sebacate, lauryl lactate, myristyl lactate, and cetyl lactate.

15 (g) Alkenyl esters of fatty acids having 10 to 20 carbon atoms. Examples thereof include, but are not limited to, oleyl myristate, oleyl stearate, and oleyl oleate.

(h) Fatty acids having 9 to 22 carbon atoms. Suitable examples include, but are not limited to, pelargonic, lauric, myristic, palmitic,
20 stearic, isostearic, hydroxystearic, oleic, linoleic, ricinoleic, arachidonic, behenic, and erucic acids.

(i) Fatty alcohols having 10 to 22 carbon atoms, such as, but not limited to, lauryl, myristyl, cetyl, hexadecyl, stearyl, isostearyl, hydroxystearyl, oleyl, ricinoleyl, behenyl, erucyl, and 2-octyl dodecyl alcohols.

25 (j) Fatty alcohol ethers, including, but not limited to ethoxylated fatty alcohols of 10 to 20 carbon atoms, such as, but are not limited to, the lauryl, cetyl, stearyl, isostearyl, oleyl, and cholesterol alcohols having attached thereto from 1 to 50 ethylene oxide groups or 1 to 50 propylene oxide groups or mixtures thereof.

30 (k) Ether-esters, such as fatty acid esters of ethoxylated fatty alcohols.

-89-

(l) Lanolin and derivatives, including, but not limited to, lanolin, lanolin oil, lanolin wax, lanolin alcohols, lanolin fatty acids, isopropyl lanolate, ethoxylated lanolin, ethoxylated lanolin alcohols, ethoxylated cholesterol, propoxylated lanolin alcohols, acetylated lanolin, acetylated lanolin alcohols, lanolin alcohols linoleate, lanolin alcohols ricinoleate, acetate of lanolin alcohols ricinoleate, acetate of ethoxylated alcohols-esters, hydrogenolysis of lanolin, ethoxylated hydrogenated lanolin, ethoxylated sorbitol lanolin, and liquid and semisolid lanolin absorption bases.

(m) Polyhydric alcohols and polyether derivatives, including, but not limited to, propylene glycol, dipropylene glycol, polypropylene glycol [M.W. 2000-4000], polyoxyethylene polyoxypropylene glycols, polyoxypropylene polyoxyethylene glycols, glycerol, ethoxylated glycerol, propoxylated glycerol, sorbitol, ethoxylated sorbitol, hydroxypropyl sorbitol, polyethylene glycol [M.W. 200-6000], methoxy polyethylene glycols 350, 550, 750, 2000, 5000, poly(ethylene oxide) homopolymers [M.W. 100,000-5,000,000], polyalkylene glycols and derivatives, hexylene glycol (2-methyl-2,4-pentanediol), 1,3-butylene glycol, 1,2,6-hexanetriol, ethohexadiol USP (2-ethyl-1,3-hexanediol), C₁₅-C₁₈ vicinal glycol and polyoxypropylene derivatives of trimethylolpropane.

(n) Polyhydric alcohol esters, including, but not limited to, ethylene glycol mono- and di-fatty acid esters, diethylene glycol mono- and di-fatty acid esters, polyethylene glycol [M.W. 200-6000], mono- and di-fatty esters, propylene glycol mono- and di-fatty acid esters, polypropylene glycol 2000 monooleate, polypropylene glycol 2000 monostearate, ethoxylated propylene glycol monostearate, glyceryl mono- and di-fatty acid esters, polyglycerol poly-fatty acid esters, ethoxylated glyceryl monostearate, 1,3-butylene glycol monostearate, 1,3-butylene glycol distearate, polyoxyethylene polyol fatty acid ester, sorbitan fatty acid esters, and polyoxyethylene sorbitan fatty acid esters.

(o) Wax esters, including, but not limited to, beeswax, spermaceti, myristyl myristate, and stearyl stearate and beeswax derivatives, including, but not limited to, polyoxyethylene sorbitol beeswax, which are

-90-

reaction products of beeswax with ethoxylated sorbitol of varying ethylene oxide content that form a mixture of ether-esters.

(p) Vegetable waxes, including, but not limited to, carnauba and candelilla waxes.

5 (q) Phospholipids, such as lecithin and derivatives.

(r) Sterols, including, but not limited to, cholesterol and cholesterol fatty acid esters.

(s) Amides, such as fatty acid amides, ceramides, ethoxylated fatty acid amides, and solid fatty acid alkanolamides.

10 The lotions further preferably contain [by weight] from 1% to 10%, more preferably from 2% to 5%, of an emulsifier. The emulsifiers can be nonionic, anionic or cationic. Examples of satisfactory nonionic emulsifiers include, but are not limited to, fatty alcohols having 10 to 20 carbon atoms, fatty alcohols having 10 to 20 carbon atoms condensed with 2 to 20 moles of ethylene oxide
15 or propylene oxide, alkyl phenols with 6 to 12 carbon atoms in the alkyl chain condensed with 2 to 20 moles of ethylene oxide; mono- and di-fatty acid esters of ethylene oxide, mono- and di-fatty acid esters of ethylene glycol where the fatty acid moiety contains from 10 to 20 carbon atoms, diethylene glycol, polyethylene glycols of molecular weight 200 to 6000, propylene glycols of
20 molecular weight 200 to 3000, glycerol, sorbitol, sorbitan, polyoxyethylene sorbitol, polyoxyethylene sorbitan and hydrophilic wax esters. Suitable anionic emulsifiers include, but are not limited to, the fatty acid soaps, e.g. sodium, potassium and triethanolamine soaps, where the fatty acid moiety contains from 10 to 20 carbon atoms. Other suitable anionic emulsifiers include, but are not
25 limited to, the alkali metal, ammonium or substituted ammonium alkyl sulfates, alkyl arylsulfonates, and alkyl ethoxy ether sulfonates having 10 to 30 carbon atoms in the alkyl moiety. The alkyl ethoxy ether sulfonates contain from 1 to 50 ethylene oxide units. Among satisfactory cationic emulsifiers are quaternary ammonium, morpholinium and pyridinium compounds. Certain of the emollients
30 described in preceding paragraphs also have emulsifying properties. When a lotion is formulated containing such an emollient, an additional emulsifier is not needed, though it can be included in the composition.

-91-

Other conventional components of such lotions may be included. One such additive is a thickening agent at a level from 1% to 10% by weight of the composition. Examples of suitable thickening agents include, but are not limited to: cross-linked carboxypolymethylene polymers, ethyl cellulose, polyethylene glycols, gum tragacanth, gum kharaya, xanthan gums and bentonite, hydroxyethyl cellulose, and hydroxypropyl cellulose.

The balance of the lotion is water or a C₂ or C₃ alcohol, or a mixture of water and the alcohol. The lotions are formulated by admixing all of the components together. Preferably bioluminescence generating system reagents are suspended or otherwise uniformly dispersed in the mixture.

In certain embodiments the components may be mixed just prior to use. Devices for effecting such mixture are known to those of skill in the art or are exemplified herein.

Kits containing the lotion and powders, capsular vehicles and, optionally, buffer compositions containing ATP, Ca²⁺ and other ingredients required for the bioluminescence reaction are also provided.

(2) Creams

The creams are similarly formulated to contain an effective concentration typically at between about 0.1%, preferably at greater than 1% up to and greater than 50%, preferably between about 3% and 50%, more preferably between about 5% and 15% [by weight] of one or more the bioluminescence generating systems provided herein. The creams also contain from 5% to 50%, preferably from 10% to 25%, of an emollient and the remainder is water or other suitable non-toxic carrier, such as an isotonic buffer. The emollients, as described above for the lotions, can also be used in the cream compositions. The cream may also contain a suitable emulsifier, as described above. The emulsifier is included in the composition at a level from 3% to 50%, preferably from 5% to 20%.

(3) Solutions and suspensions for topical application

These compositions are formulated to contain an amount sufficient to produce a visible glow, typically at a concentration of between about 0.1 - 10 mg/l preferably between 1 and 5 mg/l of the luciferase. The amount of luciferin

-92-

is similarly between about 0.1 and 10 mg/l, although the amount can be selected based on the desired duration of the glow. The balance is water, a suitable organic solvent or other suitable solvent or buffer. Suitable organic materials useful as the solvent or a part of a solvent system are as follows:

- 5 propylene glycol, polyethylene glycol [M.W. 200-600], polypropylene glycol [M.W. 425-2025], glycerine, sorbitol esters, 1,2,6-hexanetriol, ethanol, isopropanol, diethyl tartrate, butanediol, and mixtures thereof. Such solvent systems can also contain water.

- Solutions or suspensions used for topical application can include any of
- 10 the following components: a diluent, such as water saline solution, fixed oil, polyethylene glycol, glycerine, propylene glycol or other synthetic solvent; antimicrobial agents, such as benzyl alcohol and methyl parabens; antioxidants, such as ascorbic acid and sodium bisulfite; chelating agents, such as EDTA; buffers, such as acetates, citrates and phosphates; and agents for the
- 15 adjustment of tonicity such as sodium chloride or dextrose. Liquid preparations can be enclosed in ampules, disposable syringes or multiple dose vials made of glass, plastic or other suitable material. Suitable carriers may include physiological saline or phosphate buffered saline [PBS], and the suspensions and solutions may contain thickening and solubilizing agents, such as glucose,
- 20 polyethylene glycol, and polypropylene glycol and mixtures thereof. Liposomal suspensions, may also be suitable as pharmaceutically acceptable carriers. These may be prepared according to methods known to those skilled in the art.

- These compositions that are formulated as solutions or suspensions may be applied to the skin, or, may be formulated as an aerosol or foam and applied
- 25 to the skin as a spray-on. The aerosol compositions typically contain [by weight] from 25% to 80%, preferably from 30% to 50%, of a suitable propellant. Examples of such propellants are the chlorinated, fluorinated and chlorofluorinated lower molecular weight hydrocarbons. Nitrous oxide, carbon dioxide, butane, and propane are also used as propellant gases. These
- 30 propellants are used as understood in the art in a quantity and under a pressure suitable to expel the contents of the container.

-93-

Solutions, may be formulated as 0.01%-10% isotonic solutions, pH about 5-8, with appropriate salts, and preferably containing one or more of the compounds herein at a concentration of about 0.1%, preferably greater than 1%, up to 50% or more. Suitable mild solutions are known [see, e.g., U.S. Patent No. 5,116,868, which describes typical compositions of ophthalmic irrigation solutions and solutions for topical application]. Such solutions, which have a pH adjusted to about 7.4, contain, for example, 90-100 mM sodium chloride, 4-6 mM dibasic potassium phosphate, 4-6 mM dibasic sodium phosphate, 8-12 mM sodium citrate, 0.5-1.5 mM magnesium chloride, 1.5-2.5 mM calcium chloride, 15-25 mM sodium acetate, 10-20 mM D.L.-sodium β -hydroxybutyrate and 5-5.5 mM glucose.

The active materials can also be mixed with other active materials, that do not impair the desired action, or with materials that supplement the desired action.

15

(4) Gels

Gel compositions can be formulated by admixing a suitable thickening agent to the previously described [(3)] solution or suspension compositions. Examples of suitable thickening agents have been previously described with respect to the lotions.

20

The gelled compositions contain an effective amount of one or more an anti-hyperalgesic amount, typically at a concentration of between about 0.1 mg/l - 10 mg/l or more of one or more of systems provided herein, from 0% to 75%, from 0.5% to 20%, preferably from 1% to 10% of the thickening agent; the balance being water or other aqueous carrier.

25

(5) Solids

Compositions of solid forms may be formulated as stick-type compositions intended for application to the lips or other parts of the body. Such compositions contain an effective amount of one or more of the compounds provided herein. The amount is typically an amount effective to glow when contacted with moist skin, such as lips, typically at a concentration of between about 0.1 mg/l - 10 mg/l or more of one or more of the systems provided herein. The solids also contain from about 40% to 98%, preferably

30

-94-

from about 50% to 90%, of the previously described emollients. This composition can further contain from 1% to 20%, preferably from 5% to 15%, of a suitable thickening agent, and, if desired or needed, emulsifiers and water or buffers. Thickening agents previously described with respect to lotions are
5 suitably employed in the compositions in solid form.

Other ingredients, such as preservatives, including methyl-paraben or ethyl-paraben, perfumes, dyes or the like, that are known in the art to provide desirable stability, fragrance or color, or other desirable properties, such as shielding from actinic rays from the sun, to compositions for application to the
10 skin may also be employed in a composition for such topical application.

2. Glowing toys and other items

Examples of uses of the bioluminescence generating systems in toys include illumination of dolls, toy vehicles, hoola hoops, yo-yos, balloons, immersible bubble generating toys, such as a toy submarine that blows glowing
15 bubbles, and any other toy amenable to having a generally translucent covering defining a space for containment of the bioluminescence generating system and addition of the final ingredients necessary for the illumination reaction. Also contemplated herein are toys that eject or spew a fluid. For example, toy or game projectiles are contemplated that contain a luciferase and bioluminescence
20 substrate in an oxygen-free environment. The projectiles rupture upon impact with a hard surface thereby exposing the contents to moisture in the air that contains dissolved oxygen, the bioluminescence activator, and causing reaction.

Dolls and dummies containing one or two of the bioluminescence generating system components within a transparent or translucent portion of
25 their bodies are also contemplated herein. Addition of the remaining bioluminescence generating system component(s) results in illumination of that body part or area. For example, a doll can have a visible, translucent digestive system containing a luciferase and substrate in a water-free environment. Upon "ingestion" of water by the doll, that is addition of water through its mouth, for
30 example, the digestive system glows or is illuminated.

Other examples of uses of the bioluminescence generating systems in toys include, but are not limited to illuminated hoola hoops, yo-yos, slimy play

-95-

materials, such as those based on sodium alginate and glycerine [U.S. Patent No. 5,310,421], such as those sold by MATTEL[®] as FLOAM[®], GAK[®], and SMUD[®] and moldable play materials, such as those described in U.S. Patent Nos. 2,541,851, 3,384,498, 3,565,815, 3,634,280, 3,661,790, 3,804,654,
5 3,873,485, 4,076,547, 4,172,054, 4,229,790, 4,624,976 and 4,735,660, all of which are incorporated herein in their entirety. With respect to the slimy and moldable play materials, the bioluminescence generating components can be incorporated into the play material during manufacture, as liposomes, or linked to the material.

10 The slimy play materials may be manufactured from materials, such as vegetable gums [see, e.g., U.S. Patent No. 4,067,313] or absorbents, such as the polyacrylates used in diapers [see, e.g., U.S. Patent Nos. 5,552,012, 4,657,537, 4,747,960, 4,295,987; see, also, U.S. Patent No. 5,532,350] and other such products. These materials, which are readily available, are mixed
15 with borax or glycerin, to produce slime of the desired consistency.

In one embodiment, the slimy play materials are fabricated from self cross-linking sodium alginate, a glycerin solution [concentration over 90%], water and preservatives. In other embodiments, the slimy play materials are formulated from the endosperm of the seed of the Indian guar tree, which is mixed with
20 borax in an amount such that a slimy material results. In another alternative embodiment, the slimy play materials are fabricated from polyvinyl alcohol and tetraborate. Polyacrylate, such as that used as the absorbent in diapers, may also be used as the slimy material. In all instances, the slimy material is combined with the bioluminescence generating systems as described herein.

25 In another embodiment, discussed further below and in the Examples, the slimy play material is packaged in a compressible dispensing apparatus, for example, as illustrated in Figure 27. In such an apparatus, all but one of the bioluminescence generating reagents may be provided in a compartment situated within the dispensing apparatus. A second compartment within the
30 apparatus may contain less than all the components required to complete the slimy play material composition, and the main body of the apparatus may

-96-

contain the remaining bioluminescence generating reagents and/or remaining slimy play material components.

Alternatively, three compartments within the compressible dispensing apparatus may be provided where, the third compartment contains either or
5 both of the remaining bioluminescence generating reagents or the remaining slimy play material components. The main body of the apparatus would then contain an aqueous composition within which to mix the contents of the three compartments or the bioluminescence generating reagents or slimy play material components not contained within the third compartment.

10 In still other embodiments, the slime material is provided without bioluminescence generating reagents and the bioluminescence generating reagents are provided as separate compositions, in time release vehicles or other delivery vehicles, and are mixed into the material prior to use.

Another slimy material provided herein is prepared from 2-4% sodium
15 tetraborate 2-3 ml and 2-8% polyvinyl alcohol mixed with 10 ml add 100 μ gs charged aequorin or other suitable luciferase. When used with aequorin, addition of a little water (tap water or other calcium-containing aqueous medium) results in slime material that lights up. As mentioned above, one embodiment of an apparatus designed for containing and delivering the slimy
20 play material is shown in Figure 27. The apparatus is a compressible apparatus, for example, like a toothpaste tube, having one, two or three, preferably two, compartments inside the compressible apparatus. The compartments are formed, at least in part, of a readily rupturable material, such as plastic, such that upon squeezing the compressible apparatus, the contents of the
25 compartments are released into the main body of the apparatus and are thereby mixed.

One compartment of the compressible apparatus may contain slime material with a luciferase and the other compartment contain the remaining bioluminescence generating components or the remaining components in slime.
30 Alternatively, one compartment contains sodium tetraborate and luciferase and the other compartment contains the polyvinyl alcohol. In a three compartment system, one compartment may contain luciferin and luciferase packaged in the

-97-

absence of oxygen. The second compartment may contain the polyvinyl alcohol and the third compartment contain the sodium tetraborate. The main body of the compressible apparatus would then contain the remaining slime material ingredients and the remaining bioluminescence generating reagents, such as calcium ion. If oxygen is the final bioluminescence generating reagent required, it may be present in the aqueous slime material composition present in the main body of the apparatus, or it may be provided by the atmosphere when the slime material is expelled. Other variations in which the components are separated are also contemplated herein.

- 10 Other alternative embodiments of the moldable play materials include those fabricated from dimethyl silicone treated with a compound of boron preferably followed by further treatment using heat and/or a catalyst, as described in U.S. Patent No. 2,541,851; those fabricated from manogalactan gum, alkali metal borate, boric acid, high molecular weight polysaccharide, bacteriostat, fungistat, filler, colorant and perfume, as described in U.S. Patent No. 3,384,498; those fabricated from material fillers, such as clay and talc, together with hydrocarbon petroleum distillate oil, waxy paraffinic hydrocarbon oil, a liquid silicone compound, an astringent, a humectant, glue and water, such as described in U.S. Patent No. 3,804,654; those fabricated from synthetic resin and a wooden powder together with an oil formulation, where the synthetic resin is a rubber reinforced styrene resin and the oil used is a hydrocarbon oil utilizing an aromatic ring forming carbon, such as described in U.S. Patent No. 4,624,976; or those fabricated from wood flower combined with a water-based gel using cross-linkable guar gum as a gellant, such as described in U.S. Patent No. 4,735,660.

- 25 The glycerin based slimy play materials, such as those described in U.S. Patent No. 5,310,421] contains 2.5-4.0 by weight 3.33 weight %, of a self-crosslinking sodium alginate; 1.0-3.5 weight % of a glycerin and water composition in excess of 90% glycerin; a preservative; 4.0 weight % NaCl; and water, and can include 0.04-0.08 weight % of a colorant. As modified herein, it will also include up to all but one component of a bioluminescence generating system, such as a luciferase, such as *Renilla* or *Vargula* or a firefly luciferase, or
- 30

-98-

a luciferin and luciferase, such as the *Aequorin* photoprotein and EDTA. A second mixture of the slime material will contain the remaining components.

A preferred slimy material contains 2.5-4.0% by weight, preferably 3.33% by weight, of a self-crosslinking sodium alginate; 1.0-3.5% by weight of a glycerin and water solution in excess of 90% glycerin; one or more preservatives; 2.0-7.0%, preferably about 4%, by weight NaCl; and water, and can include 0.04-0.08% by weight of one or more colorants. The material will also include up to all but one component of a bioluminescence generating system, such as a luciferase, such as *Renilla* or *Vargula* or a firefly luciferase, or a luciferin and luciferase, such as the *Aequorin* photoprotein and EDTA.

The slimy play material may be made to glow by contacting it with a second mixture of the slime material containing the remaining components of the bioluminescence generating system or by contacting it with the air or an aqueous composition, where molecular oxygen or calcium ion is required to complete the reaction. The second mixture can also contain a different colorant, so that upon mixing not only will the material glow, it will change color.

The concentrations of bioluminescence system components, such as luciferase, will be those sufficient to generate a visible glow. The concentrations of luciferase can be empirically determined, but generally will be between about 0.1 and 1 mg per liter of material. The amount of luciferin generally will be in excess. The luciferases and luciferin and other components can also be provided as time release vehicles in the material or provided separately for subsequent addition.

This slime material can be packaged as a kit or article of manufacture containing a first slime composition containing all but at least one bioluminescence generating reagent, and a second slime composition containing the remaining components. The kit will include instructions for mixing the two compositions to produce a glowing composition. The kit can also contain additional compositions or vehicles or dried powders of bioluminescence generating reagents so that they can be added prior to use so that the material can be reused.

-99-

In another embodiment, discussed further below and in the Examples, the slimy play material is packaged in a compressible dispensing apparatus, for example, as illustrated in Figure 27. In such an apparatus, up to all except for one of the bioluminescence generating reagents may be provided in a

5 compartment situated within the dispensing apparatus. A second compartment within the apparatus may contain less than all the components required to complete the slimy play material composition, and the main body of the apparatus may contain the remaining bioluminescence generating reagents and/or remaining slimy play material components.

10 Alternatively, for example, three compartments within the compressible dispensing apparatus may be provided such that the third compartment contains one or all of the remaining bioluminescence generating reagents or the remaining slimy play material components. The main body of the apparatus would then contain a composition, typically an aqueous solution within, which
15 to mix the contents of the three compartments or the bioluminescence generating reagents or slimy play material components not contained within the third compartment.

In still other embodiments, the slime material is provided without bioluminescence generating reagents and the bioluminescence generating
20 reagents are provided as separate compositions, in time release vehicles or other delivery vehicles, and are mixed into the material prior to use.

Another slimy material provided herein is prepared from 2-4% sodium tetraborate 2-3 ml and 2-8% polyvinyl alcohol mixed with 10 ml add 100 μ gs charged aequorin or other suitable luciferase. When used with aequorin,
25 addition of a little water [tap water or other calcium-containing composition] results in slime material that lights up. As mentioned above, one embodiment of an apparatus designed for containing and delivering the slimy play material is shown in Figure 27. The apparatus is a compressible apparatus, for example, like a toothpaste tube, having one, two or three, preferably two, compartments
30 inside the compressible apparatus. The compartments are formed, at least in part, of a readily rupturable material, such as plastic, such that upon squeezing

-100-

the compressible apparatus, the contents of the compartments are released into the main body of the apparatus and are thereby mixed.

One compartment of the compressible apparatus may contain slime material with a luciferase and the other compartment contain the remaining bioluminescence generating components or the remaining components in slime. Alternatively, one compartment contains sodium tetraborate and luciferase and the other compartment contains the polyvinyl alcohol. In a three compartment system, one compartment may contain luciferin and luciferase packaged in the absence of oxygen. The second compartment may contain the polyvinyl alcohol and the third compartment contain the sodium tetraborate. The main body of the compressible apparatus would then contain the remaining slime material ingredients and the remaining bioluminescence generating reagents, such as calcium ion. If oxygen is the final bioluminescence generating reagent required, it may be present in the aqueous slime material composition present in the main body of the apparatus, or it may be provided by the atmosphere when the slime material is expelled. Other variations in which the components are separated are also contemplated herein.

Other toys, games, novelty items, clothes, accessories, foods, beverages, fountains, water dispensing apparatus, soaps, creams, cosmetics and sporting equipment amenable to bioluminescence are further embodiments of the presently disclosed combination. Thus, any article of manufacture or substance capable of modification to allow bioluminescence thereof is contemplated herein.

Articles of manufacture that are amenable to use with the bioluminescence generating systems provided herein are well known [see, e.g., U.S. Patent Nos.: 5,415,151, 5,018,449, 3,539,794, 5,171,081, 4,687,663, 5,038,963, 4,765,510, 4,282,678, 5,366,108, 5,398,827, 5,397,014, 5,219,096, 5,305,919, 5,184,755, 5,029,732, 4,214,674, 4,750,641, 4,676,406], which describe devices useful as toy water guns or vessels for beverages or creams and lotions. To be amenable to use in the embodiments described herein, each may require some modification, such as, for example, addition of a mixing chamber.

-101-

In light of the disclosure herein, such modification will be apparent.

Some of the patents describe other toy devices, training mock weapon devices, dolls, and beverage containers and dentifrice containers [i.e., toothpaste tubes].

In the simplest modification, powdered or capsular vehicles containing

- 5 bioluminescence generating systems may be added to the water-holding chambers of the toy gun or other water spewing toy. As the powder dissolves or the vehicle releases its contents, typically luciferin and luciferase, contact with the water in the gun will cause the bioluminescence reaction to occur.

As is apparent from the above, toy guns are well known items and

- 10 materials and specifications for manufacture thereof are also well known [see, the above list and see, also, U.S. Patent Nos. 5,029,732, and 5,415,151]. Any single chamber squirt gun may be used in combination with bioluminescence generating systems herein by mixing the components in the gun chamber. Of course the selected system should be one that has sustained illumination.

- 15 Alternatively, pellets of encapsulated bioluminescent components, such as the aequorin photoprotein or the *Renilla* luciferase and luciferin, may be added to water in the gun chamber. In the case of the aequorin photoprotein and *Renilla* luciferase, added tap water may be sufficient. For the *Renilla* system the pellets may contain the luciferase and luciferin or either. The remaining component will
20 be added to the gun chamber. If pellets are used, the pellets will slowly release their contents thereby providing for a continuous glow.

Similar apparatus and designs are also used for any fountain or water propelling device. Any such device [see, e.g., U.S. Patent No. 5,360,142] may be modified to include a bioluminescence system to produce a glowing stream.

- 25 In all of these devices, the water, for example, can be tap water or a selected buffer, particularly phosphate buffered saline. The items may be packaged as kits with the packaged luciferin, luciferase, and including the water.

- 30 a. Single, dual and multiple chamber toy guns and other toy weapons that shoot pellets or liquid

Numerous toy guns and other toy weapons that shoot pellets or liquid, in addition to those exemplified herein, are suitable for use in combination with the bioluminescence generating systems herein. The toy weapons may be loaded

-102-

- with a composition containing microspheres of luciferin and/or luciferase, or with lyophilized luciferin/luciferin, or other mixtures as described herein.
- Suitable toy weapons and devices that shoot jets or sprays of water are described in the following sampling of U.S. patents: 5,462,469 [toy gun that
- 5 shoots bubbles]; 5,448,984 [toy gun that shoots balls and water and can be modified to shoot light or temperature sensitive pellets, which should be stored under appropriate conditions or appropriately packaged, that release luciferin/luciferase when exposed to light]; 5,439,139; 5,427,320; 5,419,458; 5,381,928; 5,377,656; 5,373,975; 5,373,833 and 5,373,832 [which describe
- 10 toy guns that rely upon a pressurizable bladder for release of air pressure to shoot a projectile, which can be modified to shoot projectiles of encapsulated luciferin/luciferase]; 5,370,278 [which describes liquid from a port mounted to a headband]; 5,366,108; 5,360,142 [which describes a supply and delivery assembly for use in combination with a pump type water gun or other water
- 15 propelling device]; 5,346,418; 5,343,850 [which describes a projectile launcher for use in combination with the pellets provided herein]; 5,343,849; 5,339,987 [which describes water guns that have at least one pressurizable air/ water storage tank, a pressurizing mechanism, a channel of release for shooting water and a release mechanism]; 5,326,303; 5,322,191; 5,305,919; 5,303,847
- 20 [which describes a device worn on a user's hand with sheaths for the tips of the fingers that includes a housing for a water reservoir, a water pump and electrical motor and a battery pack to be secured to the user's body]; 5,292,032; 5,284,274 [which describes an action toy system including a capsule for containing water, which will herein contain components of a
- 25 bioluminescence generating system, having an orifice and a plunger and a spring loaded mechanism for driving the water from the orifice. The action toy may be configured as a shotgun accepting a plurality of prefilled shell capsules into its breechblock for firing through its barrel, as a missile launcher in which the capsules are mounted to the front of the launcher and the water is ejected
- 30 directly from the capsule against the target, or as a crossbow with the bow loading the spring-loaded mechanism and a water stream obtained on release of the bow]; 5,284,272 [which describes a bottle and cap combination for

-103-

spewing liquid]; 5,256,099; 5,244,153; 5,241,944; 5,238,149; 5,234,129; 5,224,625; 5,213,335; 4,854,480; 5,213,089; 5,184,755; 5,174,477; 5,150,819; 5,141,467; 5,141,462; 5,088,950; 5,071,387 [which describes a figurine-shaped water squirting toy]; 5,064,095 [which describes a water
5 cannon apparatus]; 5,029,732; 5,004,444; 4,892,228; 4,867,208 [which describes an apparatus for storing and dispensing fluid under pressure]; 4,808,143; 4,784,293, 4,768,681; 4,733,799; 4,615,488 and many others. U.S. Patent No. 5,415,151 describes a toy gun that launches projectiles that can be adapted for shooting the pellets, such as light sensitive pellets that are
10 degraded upon exposure to light, provided herein.

Referring now to Figure 35, an alternative embodiment of a novelty squirt gun is shown and generally designated 3500. Squirt gun 3500 includes a gun body 3502, a cartridge receptacle 3504 for receiving a cartridge 3506, and a barrel 3508 having a nozzle 3510. The gun body is shaped to form a handle
15 3520, positioned such that the gun 3500 can be easily held with one hand on the handle 3520, and the other hand on the barrel 3508. Extending from the top surface of the gun body, the cartridge receptacle 3504 is formed on back surface 3512 with a pair of threaded inserts (shown in Figures 37 and 38) which allow the installation of a first fluid container 3514 and a second fluid
20 container 3516. As discussed herein in conjunction with the previously described squirt gun and other embodiments, the containers 3514 and 3516 will contain the necessary bioluminescence-generating reagents and maintain them separately until the bioluminescence-generating reagents are mixed. As will be discussed below in conjunction with Figure 36, the bioluminescence-
25 generating reagents are mixed, preferably, just an instant before the bioluminescent fluid is ejected from the gun. To maintain the containers 3514 and 3516 in position on the gun, container bracket 3518 is formed to receive the two containers and hold them in position. This support is particularly
30 important when considering that each of the containers will be filled with fluid, which if unsupported, would present excessive stresses on the back surface of the cartridge receptacle.

-104-

Gun body 3502 may also be formed with a viewing window 3524 which will allow viewing of the bioluminescent fluid prior to ejection from the gun. More specifically, as barrel 3508 is moved in the direction of arrow 3522, bioluminescence generating reagents will be drawn into the barrel, passing by window 3524. Thus, as the reagents are drawn from the containers 3514 and 3516, the user of the squirt gun may observe the bioluminescent reaction as it occurs.

Referring now to Figure 36, the squirt gun 3500 is shown with its cartridge 3506 removed, and the barrel 3508 extended from the body 3502 of the gun. The cartridge body 3526 slides into opening 3528 in the cartridge receptacle 3504 for delivery of the bioluminescence generating reagents within the cartridge to the containers 3514 and 3516. Once the bioluminescence generating reagents are within the containers, the gun is ready to be used. In use, the barrel 3508 is extended from the gun body 3502 in direction 3522 causing a chamber (shown in Figure 37) within the barrel to fill with a fluid mixture from containers 3514 and 3516. Once the barrel is extended and filled, the barrel is then pulled towards the gun body 3502 in direction 3534 to expel the fluid in a stream 3536, or in spray droplets 3538, from the nozzle 3510. The type of spray depends on how rapidly the barrel is pushed into the gun body.

Referring now to Figure 37, the gun 3500 is shown in cross-section. Cartridge 3506 is shown removed from opening 3528 in cartridge receptacle 3504. It is to be appreciated that the cartridge is insertable into the opening for recharging the gun with the bioluminescence generating reagents necessary for the bioluminescent glow. To recharge the gun 3500, an expended cartridge 3506 is removed, and a new cartridge having a quantity of the bioluminescence generating reagents is pushed in direction 3542 into opening 3528 where the chemicals are ejected into containers 3524 and 3516.

Referring to Figure 38, containers 3514 and 3516, cartridge 3506, and cartridge receptacle 3504 are shown in more detail. Specifically, containers 3514 and 3516 are shown filled with fluids 3590 and 3592. Initially, containers 3514 and 3516 are filled with fluid, typically water. Once the

-105-

containers are filled with water, they are attached to the back surface 3512 of the cartridge receptacle 3504. Such attachment is accomplished by threading the neck portion 3550 of the containers 3514 and 3516 into threaded portions 3552 of the cartridge receptacle. To prevent the leakage of the containers, 5 each threaded portion 3552 could include a sealing ring (not shown) which would be integral to either the neck portion 3550 of each container, or the threaded portions 3552, or may simply be sandwiched between them.

The cartridge body 3526 of cartridge 3506 is formed with a first cartridge chamber 3560 and a second cartridge chamber 3562. First cartridge 10 chamber 3560 is filled with a first composition containing bioluminescence generating reagents or mixture thereof 3576, and second cartridge chamber 3562 is filled with a second reagent or mixture thereof 3578. The first composition is retained within the first cartridge chamber 3560 by a plunger seal 3572 and an end seal 3564. Plunger seal 3572 is attached to the end of a 15 first piston 3568 which extends from cartridge cap 3527. Similarly, the composition is retained within the second cartridge chamber 3562 by a plunger seal 3574 and end seal 3566. Also, plunger seal 3574 is attached to a second piston 3570 which extends from the cartridge cap 3527.

Cartridge 3506 is sized to be received into the opening 3528 in the 20 cartridge receptacle 3504 and retained therein. Such retention may be accomplished by a variety of methods. For example, the cartridge may be sized to snugly fit within the cartridge receptacle so that the cartridge is retained by friction. Alternatively, the cartridge may be retained within the cartridge receptacle by embossed ridges (not shown) within the cartridge receptacle 25 which are engaged against mating ridges located on the surface of the cartridge body 3526 when the cartridge is inserted into the opening 3528. The cartridge may also be retained with a clip, latch, or other retention device known in the field, so long as the cartridge is removably retained within the cartridge receptacle 3504.

30 Once the cartridge is inserted into the cartridge receptacle, seals 3564 and 3566 are in position adjacent to the openings to the first injection tube 3544 and the second injection tube 3546, respectively. Following insertion of

-106-

the cartridge into the cartridge receptacle 3504, cartridge cap 3527 is urged towards cartridge body 3526 thereby advancing the first and second pistons 3568 and 3570, and plunger seals 3572 and 3574 into the first and second cartridge chambers 3560 and 3562. This causes an increase in pressure within the cartridge chambers to burst seals 3564 and 3566 to allow compositions 3576 and 3578 to enter the first and second injection tubes 3544 and 3546. Injection tubes 3544 and 3546 are in communication with fluid containers 3514 and 3516. Thus, as the cartridge cap 3527 is urged towards the cartridge body, the compositions 3576 and 3578 are pushed through the first and second injection tubes 3544 and 3546, and into containers 3514 and 3516. As the compositions enter the containers, each mixes with the liquid, typically water, that is already present in the container, thereby bringing the powder or paste or other concentrated composition into solution or suspension. Generally, the first cartridge chamber 3560 will preferably include lyophilized or a paste or other concentrated form luciferin, and the second cartridge chamber 3562 would typically include a lyophilized or a paste or other concentrated form of luciferase. Dry forms of these reagents are preferred. Thus, when the first composition 3576 and the second composition 3578 are injected into the containers, the chemicals mix with the fluid to form a luciferin-containing composition and a luciferase-containing composition. In preferred embodiments, the luciferin and luciferases are in solution so that their combination will provide a more thorough mixing, as well as a more rapid bioluminescent effect. As shown, compositions 3576 and 3578 are in a powdered form. It should be appreciated, however, that the compositions containing the bioluminescence generating reagents may be provided in any other form known to those of skill in the art and as discussed herein. For example, they may be in powder, granular, paste, suspension or liquid form, with the structure of the cartridge 3506 being adapted to properly dispense the chemicals into the injection tubes. Such structure could include a tapered nozzle on the end of each cartridge chamber 3560 and 3562 which would seal against the input to each injection tube 3544 and 3546.

-107-

In order to prevent the reverse flow of the compositions or fluid from the containers 3514 and 3516 back into the cartridge, a valve 3548 may be positioned within each injection tube 3544 and 3546. This valve 3548 is designed to allow the flow of material in only one direction. A typical valve type would include the duck-bill valve as shown, but could also include any variety of other valves, such as reed valves. It should be noted that any valve selected should be capable of preventing the reverse flow of fluid from the containers to the cartridge. It is also possible to seal the cartridge 3906 firmly against the injection tubes, thus eliminating the need for a valve. In other words, if there is a leak-proof seal between the cartridge and the injection tubes within the cartridge receptacle, there will be no concern with leakage of the fluids from the containers, eliminating the need for valves 3548.

Referring back to Figure 38, barrel 3508 is extended from the gun body 3502 showing shaft 3530 having a mixing chamber 3532. Fluid enters the mixing chamber 3532 via the first container fluid tube 3554 and the second container fluid tube 3556. Each of these tubes provide a fluid pathway from the containers 3514 and 3516 into the mixing chamber 3532. More specifically, first container fluid tube 3554 enters container 3514 through neck portion 3550. In order to allow the free positioning of the fluid tube within the container, the tube is typically made of a soft vinyl. Such material insures that the fluid tube is always positioned within the fluid 3590, regardless of the orientation of the gun body itself. A filter 3558 is attached to the end of the fluid tube 3554 to prevent the entrance of dirt, debris, or undissolved components, into the fluid tube. Such a filter could be made from a porous Teflon, paper, or any other filter material which would prevent the entrance of particles into the fluid tubes. The second container fluid tube 3556 is similar to the first container fluid tube, and is also equipped with a filter 3558.

In order to prevent the reverse flow of the composition from the mixing chamber 3532 back into the containers 3514 and 3516, a pair of inlet valves 3582 and 3584 are provided. These inlet valves are intended to provide uninhibited flow from the containers into the mixing chamber, yet prevent any appreciable reverse fluid flow. In this embodiment, a float type valve is used

-108-

which, when fluid is drawn into the mixing chamber by creating a vacuum therein, the inlet valve is in its open state. However, when a positive pressure is created within the mixing chamber, the valves 3582 and 3584 close. This prevents the reverse flow of fluid from the mixing chamber back into the
5 containers. Such reverse flow would be particularly disadvantageous, resulting in the initialization of a bioluminescent reaction within the containers, instead of exclusively within the mixing chamber.

The mixing chamber 3532 has an opening at the end opposite the fluid tubes 3554 and 3556, which leads to the nozzle 3510. Nozzle 3510
10 incorporates a chamber outlet valve 3586 which operates in a reverse function as the inlet valves. More specifically, when the barrel 3508 is extended from the gun body 3502, the outlet valve 3586 closes, creating a vacuum within the mixing chamber 3532. This vacuum in turn opens the inlet valves 3554 and 3556 causing fluid to flow from the containers 3514 and 3516 into the mixing
15 chamber 3532. Once the mixing chamber is full of fluid, the barrel 3508 is forced inward toward the gun body, thereby causing the outlet valve 3586 to open, and the inlet valves 3554 and 3556 to close.

The amount of pressure which is created within the mixing chamber 3532 is a function of the diameter of the nozzle, and the force with which the
20 barrel 3508 is urged towards the gun body 3502. Specifically, the smaller the opening in the nozzle 3510, the higher the mixing chamber pressure. Also, the more force which is exerted on the barrel to force it towards the gun body 3502, the higher the pressure. Increasing the pressure within the mixing chamber will increase the velocity of the fluid jet stream 3536 which leaves the
25 nozzle 3510, and will correspondingly increase the distance the fluid jet stream will travel. Additionally, it is possible to provide short, rapid increases in the pressure within the mixing chamber to provide a short burst of a fluid jet stream 3536, or even to provide fluid droplets 3538.

Referring now to Figure 39, another embodiment of the novelty squirt
30 gun is shown in part. Specifically, Figure 39 details the barrel portion of another embodiment, and is generally designated 3600. Barrel 3600 includes a grip portion 3602 which is attached to a barrel body tube 3605. Barrel body

-109-

tube 3605 is sized to slide over slide tube 3604 which extends from gun body 3606. More specifically, referring to Figure 40, the barrel 3600 is shown extending in direction 3632 from gun body 3606 on the external surface of body tube 3605. Fluid tube 3608 extends the length of the barrel 3600 to provide fluid communication from the containers (not shown in this Figure), through fluid inlet tube 3618 and fluid inlet valve 3616, and to the mixing chamber 3630.

The fluid flow into the mixing chamber is controlled by chamber valve 3612 and inlet valve 3616. Chamber valve 3612 is mounted to the fluid tube cap 3610 by insertion of retaining clips 3626 through a center hole formed in cap 3610. Chamber valve 3612 includes a chamber sealing ring 3628 on head portion 3620 which seals against the inside wall of the mixing chamber 3630. The retaining clips 3626 of chamber valve 3612 provide for the movement of the chamber valve from a position seated against the fluid tube cap 3610 to a position extended away from the fluid tube cap 3610. In the position against the fluid tube cap 3610, sealing ring 3624 seats against tapered seat 3622 to prevent the flow of fluid from the mixing chamber 3630 into the fluid tube 3608. In the position extended away from the fluid tube cap 3610, sealing ring 3624 is not seated within the tapered seat 3622, thereby allowing fluid to flow in direction 3634 and into the mixing chamber 3630. To facilitate such fluid flow, the chamber valve may be formed with one or more through holes (not shown) which extend through the head portion 3620. These through holes may be of any variety of sizes, so long as there is a sufficient vacuum created within the mixing chamber 3630 when the nozzle is moved in direction 3632 to draw in fluid from the fluid tube 3608.

Inlet valve 3616 receives the first and second compositions from the containers 3554 and 3556 through the first and second container fluid tubes 3514 and 3516. It should be appreciated that although only one fluid inlet tube 3618 is shown in Figures 39 through 41, two are needed to maintain the bioluminescence generating reagents separately until the mixing process is required. Inlet valve 3616 receives fluid inlet tube 3618 from one container. A second fluid inlet tube (not shown) can be provided to inlet valve 3616, or a

-110-

second inlet valve may be used. In any case, the contents are prevented from flowing from the fluid tube 3608 back into fluid inlet tubes 3618 by inlet valve 3616. This prevents the reverse flow of fluid that is already a mixture of the two bioluminescent materials into one of the fluid inlet tubes. If such flow was not prevented, the bioluminescent reaction could take place within the fluid inlet tube 3618, and could even lead to contamination of the fluid within the containers 3514 and 3516.

The operation of the barrel is, perhaps, more clearly understood by comparison of Figures 40 and 41. Referring initially to Figure 40, the barrel 3600 is extended away from the gun body 3606 in direction 3632. Such movement of the barrel creates a vacuum within mixing chamber 3630 which in turn opens chamber valve 3612. More specifically, the vacuum created within the mixing chamber 3630 draws chamber valve 3612 away from the fluid tube cap 3610 such that sealing ring 3624 is not sealed against tapered seat 3622, thereby allowing fluid to flow in direction 3634 into the mixing chamber. As the grip portion 3602 is fully extended to the end of body tube 3605, the mixing chamber is filled with a fluid comprising the appropriate percentages of fluid from containers 3514 and 3516. Once within the mixing chamber, the fluids mix to create a bioluminescent reaction.

After the mixing chamber 3630 is sufficiently filled with now-bioluminescent fluid, grip portion 3602 is then urged in direction 3636 towards gun body 3606. As the grip portion is moved toward the gun body, pressure within the mixing chamber increases to force the chamber valve 3612 toward fluid tube cap 3610. As the chamber valve 3612 strikes the fluid cap 3610, the sealing ring 3624 seats against tapered seat 3622 to prevent any fluid from flowing from the mixing chamber 3630 back into the fluid tube 3608. The increased pressure within the mixing chamber 3630 causes the fluid to flow in direction 3638 and out nozzle 3614 to form a fluid spray stream 3640. It is to be appreciated that the more force which is used to urge grip portion 3602 towards the gun body 3606, the greater the pressure will be within the mixing chamber, and the greater the velocity of the fluid spray stream 3640.

-111-

In order to assist in the creation of the vacuum within the mixing chamber 3630 when the grip portion 3602 is extended from the gun body 3606, a nozzle valve (not shown) may be included within nozzle 3614. Such a nozzle valve would prevent any vacuum created within the mixing chamber to
5 be equalized by air flowing in through the nozzle. A typical nozzle valve could include a duck-bill valve, or a reed valve. It should be appreciated that a nozzle valve is not required for the proper operation of the barrel 3600, but is only included to increase the vacuum within the mixing chamber 3630.

Alternatively, the nozzle 3614 may be shaped with a narrow opening at its tip,
10 or may be designed to have a small cross-sectional area to minimize the reverse air flow into the mixing chamber 3630.

Once the fluid has been exhausted from containers 3514 and 3516, each container is removed and refilled with fluid, typically water. The water filled containers are then re-attached to the receptacle 3504. Once the containers
15 are attached, the exhausted cartridge 3506 is removed from the cartridge receptacle 3504. Next, a new cartridge having a full complement of bioluminescence generating reagents 3576 and 3578 is inserted into cartridge receptacle 3504, and the bioluminescence generating reagents are injected into
20 the containers by advancing cartridge cap 3527 towards cartridge receptacle, as described above in conjunction with Figure 38. Following injection of the reagents into the containers, the gun 3500 is recharged, and is ready for use. It should be appreciated that the steps required for recharging do not necessarily
25 have to be performed in the order described, but could be accomplished in virtually any order so long as the first and second chemicals are maintained separately until mixing within the mixing chamber in preparation for shooting the gun 3500.

Referring now to Figures 42 through 44, an alternative embodiment of a cartridge assembly is shown and generally designated 4200. More specifically, cartridge assembly 4200 includes cartridge receptacle 4202 which, similarly to
30 cartridge receptacle 3504 shown in Figure 38, is attached to, or an integral part of the gun body 3502 (not shown in this Figure). Cartridge assembly 4202 is sized to receive cartridge body 4204 which is formed on its inside surface with

-112-

a series of ribs 4206 which are sized and shaped to hold first and second cylinders 4208 and 4210 in place within the cartridge body 4204.

First and second cylinders 4208 and 4210 are equipped with pistons 4212 and 4214. Piston 4212 is formed to define a chamber 4216 which is
5 designed to hold the composition 4220 necessary to complete a bioluminescent reaction. Piston 4214 is also formed to define a chamber 4218 for holding composition 4222. Each piston 4212 and 4214 is attached to one end of a shaft 4224 and 4226, respectively. The shafts 4224 and 4226 are attached at their other end to a plunger 4232 which is formed with a locking notch 4228.
10 Locking notch 4228 is sized to receive a locking post 4230 which is integral to the cartridge body 4204 and effectively prevents the compression of the plunger when the cartridge is not inserted within the cartridge receptacle.

Cartridge receptacle 4202 is formed with a pair of threaded portions 4234 which are sized to receive the containers 4238 and 4240 (shown in
15 phantom). As shown in Figure 44, these containers 4238 and 4240 are threaded into the cartridge receptacle. Once the containers are in place, plunger 4232 is advanced in the direction of arrows 4248 such that the first and second pistons 4212 and 4214 are pushed out of their respective cylinders 4208 and 4210. As the pistons are pushed from the cartridge, the pistons enter the
20 necks of the containers 4238 and 4240 where the compositions 4220 and 4222 leave the chambers 4216 and 4218 to mix with the fluid in the containers. Typically the fluid is water and compositions of bioluminescence generating reagents will go into solution in the water.

In order to prevent the flow of water and/or solution from the containers
25 4238 and 4240 back into the cartridge, each plunger 4232 is equipped with a plunger seal 4236. These plunger seals 4236 establish a fluid-tight seal against the inside wall of cylinders 4208 and 4210 to prevent leakage of the fluid from the containers. The positioning of the seals 4236 immediately adjacent pistons 4212 and 4214 allows the pistons to be fully bathed in the fluid within the
30 containers to insure complete discharge and mixing of the compositions 4220 and 4222. As shown in Figure 44, seal 4236 is positioned against the end of cylinder 4208 such that piston 4214 is substantially exposed within the

-113-

container 4240. As a result, compositions 4222 simply fall from the piston into the container where they are suspended or, preferably, dissolved into solution.

Pistons 4212 and 4214 are formed with exterior conical portions 4242 which are designed to assist in the alignment of the pistons when leaving the cartridge body 4204, and during insertion into the cartridge receptacle 4202 and containers 4238 and 4240. Additionally, as depicted, pistons 4212 and 4214 are also formed with an interior conical portion 4244 that is designed to prevent the accumulation of undissolved, or partially dissolved, compositions 4220 and 4222 within the piston itself. More specifically, as the pistons are advanced into the containers 4238 and 4240, the interior conical portions assist in the delivery of the compositions to the containers.

Referring to Figure 42 it should be appreciated that chemicals 4220 and 4222 may be of any type discussed elsewhere herein. For example, the compositions can be in powder, liquid, granular, or other form. In order to use cartridge assembly 4200 for the introduction of the compositions in fluid form, a second piston seal can be included (not shown). Such a second piston seal would be positioned on the distal end of the piston to effectively seal the compositions within the cylinders 4208 and 4210 until the pistons are advanced into the containers where the compositions would be delivered.

In an effort to simplify the manufacturing process of the cartridges, a fill opening 4246 is provided in the wall to cylinder 4208. This fill opening is located within the cylinder above the position of the piston 4212. In order to fill the piston chamber 4216 with the necessary compositions 4220, prior to positioning of the cylinder 4208 and pistons 4212 within the cartridge body 4204, the piston is drawn into the cylinder 4208 such that the piston chamber is adjacent to the fill opening 4246. Once the piston chamber 4216 is in position, the appropriate reagents may simply be poured into the piston chamber, and the piston 4212 may be advanced into the cylinder such that the plunger seal 4236 seals the reagents within the cylinder. It should also be appreciated that the reagents may be placed within both cylinders in a similar fashion.

-114-

b. Bubble-making toys

Soap bubbles are blown from water solutions or other aqueous composition containing soap or another surfactant. A great variety of bubble formulations are available, including those that feature special effects in bubble making. There are solutions for making large bubbles, "long lasting" bubbles, split bubbles, self-healing bubbles, multiple bubbles, vanishing bubbles, flaking bubbles, bursting bubbles, high and/or far-flying bubbles, sinking bubbles etc. In general, many anionic, non-ionic or amphoteric aqueous solutions with low surface tension are suitable for bubble or foam-making when air or other gases are blown into such compositions.

Such compositions, preferably those that have near neutral pH, can be combined with the components of the bioluminescence generating systems provided herein. In particular, a mixture of luciferase and luciferin, such as the *Renilla* system or firefly system or *Cypridina* system, preferably in the form of pellets or microspheres, such as liposomes or other time release capsule, can be added to the bubble mixture. When used, the air added to the mixture will cause a glow, or a glow will be produced as the contents of the pellets are released into the composition. Alternatively, one or more component of the bioluminescence generating system may be added to the bubble making composition, such as, for example, a luciferase and any necessary activators, and the remaining component(s), e.g., a luciferin, may be directly applied to bubbles using a fine spray from an atomizer or other suitable spray or misting means.

In addition, a fluorescent protein, such as GFP, BFP or a phycobiliprotein, may be added to the bubble-making composition and then illuminated using an external light source. For example, bubbles containing a fluorescent protein may be produced in a room illuminated with light of an appropriate wavelength to cause the fluorescent protein to fluoresce.

Alternatively, the fluorescent protein may be added to the bubble-making composition containing all the components of the bioluminescence generating system to effect a change of the color of the bubbles. For example, the fluorescent proteins may be added to the bubble-making composition directly or

-115-

may be added in time-released or slowly-dissolving microspheres or liposomes, such that release of a fluorescent protein in the bubble composition, such as, for example, GFP or a phycobilliprotein, introduces a change in the color of the bubbles. It is particularly advantageous to have the fluorescent protein released
5 into the composition after the container has been opened and used. A single bottle of bubble-making solution will be amenable to the production of more than one color of bubbles. For example, microparticles or liposomes susceptible to breakdown by exposure to air or by agitation by the wand or stick used for blowing bubbles are of particular interest.

10 Kits containing such soap compositions, with preferably a moderate pH [between 5 and 8] and bioluminescence generating reagents, including luciferase and luciferin and the fluorescent protein are provided herein. These kits, for example, can be used with a bubble-blowing or producing toy. These kits can also include a reloading or charging cartridge, such as the cartridges
15 provided herein.

Toys that produce bubbles include bubbles with wand for blowing, bicycles, flying toys, dolls, swords, toy musical instruments, bubble beards, and numerous other toys are well known [see, e.g., U.S. Patent Nos.: RE 32,973, which describes a toy bubble-blowing lawn mower; 4,511,497, which describes
20 a non-toxic non-irritating bubble composition for toys, 2,579,714; 5,480,334; 5,041,042; 5,478,267; 5,462,469; 5,419,728; 5,393,256; 5,366,402; 5,348,507; 5,322,464; 5,304,085; 5,269,715; 5,224,893; 5,183,428; 5,181,875; 5,156,564; 5,135,422; 5,080,623; 5,078,636; 4,957,464; 4,955,840; 4,943,255; 4,923,426; 4,867,724; 4,861,303; 4,840,597;
25 4,808,138; 4,804,346; 4,764,141; 4,700,965; 4,556,392; 4,334,383; 4,292,754; 4,246,717; and many others].

c. Board/Card Games

Board games, card games and similar entertainment items may be used in combination with the bioluminescence generating systems described herein.
30 The boards or cards may be constructed of paper or fabric, as described herein, or may be constructed of plastic or other polymer amenable to covalent or non-covalent attachment of bioluminescence generating components.

-116-

A particular portion of the game board or a card piece is covered or impregnated one or more up to all but one of the bioluminescence components. A developing wand or sponge or similar apparatus is impregnated or coated or dispenses the remaining bioluminescence component(s) [developing reagents].

- 5 Contacting, such as by wiping, the card piece or game board with the developing wand or sponge or contents of the dispensing apparatus will produce a glow.

- 10 The developing reagents can be applied to the developing wand or sponge in various forms. For example, the developing reagents may be in solution or suspension and the sponge or wand soaked in the solution then sealed in an air-tight packaging to be opened immediately before use. Alternatively, the developing reagents may be lyophilized or dessicated and applied in powder form to the wand or sponge. Immediately before use, water is added to the wand or sponge and then wiped on the game board or card
- 15 piece.

Alternatively, the board and pieces may include adsorbed or absorbed lyophilized bioluminescence-generating reagents. Contacting these items with water, containing the appropriate salts and buffers, such as calcium, if for example, the aequorin system is used, or ATP if the firefly system is used.

- 20 The bioluminescence components applied to the game board or card piece can be applied in a particular pattern, for example to spell a word or illustrate an instruction. Preferably, the bioluminescence system chosen will be capable of repeated use. For example, the *Renilla* system, is among the preferred systems. The luciferase can be linked to the pieces, and the luciferin
- 25 can be applied to the board or card and a new developing wand or sponge used each time the game is played.

- Alternative embodiments will be appreciated, for example, the game can be an educational one in which the player uses the developing wand or sponge to reveal the correct answer to a question. Similarly, the game board may be a
- 30 puzzle where a "hidden" illustration or message is revealed by wiping the completed puzzle with the developing wand or sponge.

-117-

d. Toy "Eggs" or other encapsulated items

Egg-shaped (or any other desired shape) toys containing a liquid or paste that glows upon exposure to ambient air are a further example of a combination contemplated herein. The ingredients of the egg composition include a luciferin and luciferase, such as the *Cypridina* or *Vargula* luciferin and luciferase, which requires oxygen for activation. The liquid or paste is introduced into the "eggs" the eggs are sealed under nitrogen or other suitable gas, other than oxygen or air. Upon exposure to air, by opening or cracking the egg, the egg composition glows. This principle can be adapted to other uses, such as sphere shaped macrocapsules that may be shot from a toy gun and burst upon impact, in a manner similar to paint ball guns currently used to shoot paint balls at targets for marking. In practice, water is de-oxygenated, for example by bubbling argon or nitrogen gas through it. The de-oxygenated water is then used to mix the bioluminescence generating components, other than molecular oxygen. The mixing should take place under strictly conditions in which air or oxygen is excluded, such as in a hood under nitrogen, in order to prevent exhaustion of the bioluminescence-generating components.

In one embodiment, to produce a realistic egg-like mixture, approximately 1 to 2 mg of a luciferin/luciferase composition per 30 ml of egg volume is combined with a suitable thickener, such as hydroxymethyl cellulose, to provide the consistency of a real egg. The "shell" of the egg is formed of a suitable material which excludes oxygen (air) and is readily opened by the consumer before use. For example, the egg mixture can be packed into paper maché and covered with wax to provide an airtight seal. Similarly, the "shell" may be formed from a polymer, such as a plastic, that is airtight but readily broken when desired.

e. Footbags, Bean Bags and Balls

Glowing footbags, bean bags and balls are also provided herein. Footbags, such as the HACKY SACK, which is a registered Trademark of Wham-O Corporation, described in U.S. Patent No. 4,151,994, are generally constructed of an outer leather casing having a diameter of about three inches, which is filled with small granules, such as beans or other granular material

-118-

[see, als U.S. Patent Nos. 5,429,351, 4,963,117, 4,717,158, and 4,002,839]. The sack is used to play a game in which players kick the sack between one another, trying to keep the sack in motion and off the ground, without using their hands.

5 Contemplated herein are footbags and balls that glow as they are kicked about by the players. The bags are fabricated from an inflatable translucent material, such as a plastic. Similar to the egg mixture described above, the granules in the footbag are made in an oxygen free environment and packaged such that air/oxygen is excluded until the sack is in use. For example, the
10 granules are made of a gelatinized mixture of bioluminescence generating system components excluding molecular oxygen and are packaged in an oxygen free package, such as dry nitrogen packaging, commonly used in marine electronics, or in rupturable liposomal pellets.

15 The granules can be covered in a flexible plastic of varying thicknesses to allow for the timed ingress of oxygen across the plastic membrane. As the footbag is repeatedly kicked by the players, the mechanical stress on the granules allows more oxygen to react with the bioluminescence generating components contained therein, creating more light.

20 An alternative embodiment contemplated herein involves partitioning the granules within the footbag using, for example, a semi-permeable membrane material that permits slow permeation of the compositions contained in the two compartments thereby formed. One compartment is then filled with all but one or more bioluminescence components and the other compartment is filled with the remaining components. As the footbag is kicked about, the mechanical
25 stresses on the separating membraned force the contents of the two compartments to mix, thereby providing flashes of light or periods of illumination followed by non-illumination. For example, in one compartment, a calcium containing composition can be added to the beads, and in the other compartment, a coelenterazine-charged aequorin is added. When the footbag is
30 kicked, flashes of light are produced.

 The covering of the footbag must be translucent, transparent or some combination thereof to allow the light generated to be visible. Thus, the "sack"

-119-

can be formed from clear nylon webbing, translucent or transparent pliable plastic, translucent or transparent cloth or similar material.

f. Figurines

Glowing figurines are also provided herein. Figurines may be of any size or shape and preferably contain at least one chamber that holds liquid. The figurine may be cast, molded or manufactured from any suitable material. Preferably a portion of or the entire figurine is translucent to the wavelength of light produced in the bioluminescence generating reaction. The figurine may be in any design or theme, such as characterizations of entertainment and sport celebrities, memorabilia, slogans and logos, trademarks or other promotional items, animals, christmas ornaments or other inanimate objects. For example, small figurines may be placed in areas of dim lighting, e.g., on tables in restaurants, that contain one or more component of the bioluminescence generating system, such as a luciferase. The remaining components of the bioluminescent reaction, i.e., a luciferin and any necessary activators, are added at a the desired time and the figurine glows.

In another embodiment, one or more component(s) of the bioluminescence generating system may incorporated into or linked to the material from which the figurine is fabricated. The remaining components of the bioluminescent reaction may be sprayed or applied to the surface of the figurine to initiate the bioluminescent reaction.

3. Glowing textiles and paper products

The bioluminescence generating systems described herein are also contemplated for use with textiles and paper. One or two of the bioluminescence generating system reagents are applied to the textile or paper and the remaining components are added when illumination is desired. For example, the luciferase in association with the bioluminescence substrate may be applied to the textile or paper, through covalent or non-covalent interaction. When water, or other appropriate activator, is applied to the material, illumination ensues. Examples of uses for the textile include the fabric portion of an umbrella, clothing, towels, the fabric portion of artificial plants or flowers,

-120-

toys having a fabric component or any item susceptible to manufacture from textile material.

With respect to paper, the luciferase may be applied to the paper in association with the bioluminescence substrate. The paper glows upon addition
5 of the bioluminescence activator to the paper. Thus, if the bioluminescence activator is water, addition of water to the paper, for example as an aerosol, produces a glow on the paper. The paper may also be illuminated by "writing" upon it with one or two of the bioluminescence generating system components then "writing" or spraying over those components with the remaining
10 component(s). As with the other systems disclosed herein, the critical aspect to operation is maintaining at least one of the bioluminescence generating system components separate from the other components until illumination is desired. The paper may be in almost any form or of almost any type, such as writing paper, wrapping paper, boxes, poster paper, books, paper jewelry, paper
15 towels, napkins or other paper products.

4. Foods and beverages, including ice cubes

Examples of beverages and foodstuffs amenable to combination with bioluminescence systems include, but are not limited to, alcoholic beverages, as well as sodas and juices, and such foods as applesauce and mashed potatoes.
20 Further, bioluminescence generating systems can be chosen and adapted for use in such foodstuffs as cakes and ice creams or almost any other edible item. Considerations in combining bioluminescence systems with food and/or beverages are primarily the stability of the system throughout processing of the food or beverage, unless the system is added subsequent to any such
25 processing; the ability to contact the system with its finally required ingredients to produce bioluminescence; and taste of the components of the system with the foodstuffs to which they are added.

Bioluminescent food products are also contemplated herein. Such products, amenable to combination with the bioluminescence generating
30 systems described herein, include those that may be stored between about 0°C and 35°C. Generally, once the luciferase or bioluminescence substrate is added to the food product, it cannot be heated above about 100°C. Thus, food

-121-

products requiring cooking prior to consumption also can be cooked prior to addition of either the luciferase or bioluminescence substrate.

Examples of food products amenable for use in combination with the bioluminescence generating systems described herein include, but are not limited to, icings and other toppings or sauces, cookies, biscuits, and similar prepared foods. Bioluminescent icings, for example, may be prepared by including the luciferase and bioluminescence substrate in a dehydrated icing mixture. Addition of water, just prior to use causes the mixture to glow. Alternatively, the bioluminescence activator and either the luciferase or bioluminescence substrate may be included in the prepared icing mixture and the absent bioluminescence generating system component stirred into the icing just prior to use.

Alternatively, food products may be produced to include a fluorescent protein, such as a phycobiliprotein or a green or blue fluorescent protein, and then illuminated using an external light source. For example, icing containing fluorescent protein may be served in a room illuminated with light of an appropriate wavelength to cause the fluorescent protein to fluoresce. Similarly, a fluorescent protein may be included in an ice cream mixture, in an ice cream topping sauce, in a salad dressing, in cakes, puddings or similar food product and the food then subjected to an external light source of appropriate wavelength to initiate the fluorescence.

a. Beverages

Beverage products are likewise contemplated for use herein in combination with the bioluminescence generating systems described herein. As with other embodiments, at least one of the bioluminescence generating system components is excluded from the beverage until bioluminescence is desired. For example, a container/bladder apparatus, as described generally above and in detail below, maintains the luciferase and bioluminescence substrate separate from the beverage. Upon opening of the container, the luciferase and substrate are added to the beverage causing it to glow.

Alternatively, the beverage may be produced and packaged already containing one or two of the bioluminescence generating system components,

-122-

such that addition of the remaining components causes a glow. An example of such a beverage is bioluminescent beer, wine, champagne or a soft drink. In this embodiment, the yeast used to produce the alcohol component of the beer or other beverage, are genetically transformed to contain, for example, a gene
5 encoding a luciferase and the complementary genes necessary to direct the yeast to manufacture and secrete the luciferase. Assuming O₂ or air is the bioluminescence activator, then when a glow is desired, the bioluminescence substrate is added to the beer.

Another example of a bioluminescent beverage contemplated herein is a
10 soft drink containing two of the three bioluminescence generating system components. When bioluminescence is desired, a third bioluminescence generating system component is added. If the bioluminescence generating system is, for example, the *Aequorin* system or the *Renilla* system, then the *Aequorin* luciferase with bound luciferin or the *Renilla* luciferase and the luciferin
15 may be included in the soft drink and the bioluminescence activator, Ca²⁺ [for the aequorin system] or dissolved O₂, added to the beverage to cause a glow. Suitable vessels for such beverages are provided herein [see, EXAMPLES] and also are known to those of skill in the art [see, e.g., 5,398,827].

Similarly, a soft drink beverage can be produced containing all the
20 bioluminescence generating system components except, for example, dissolved oxygen where the bioluminescence generating selected requires oxygen to complete the bioluminescent reaction. In lieu of carbon dioxide, the beverage may have another gas or gasses dissolved therein, for example nitrogen, helium, nitrous oxides or helium oxygen (heliox). The soft drink is packaged under
25 oxygen free conditions and, upon opening of the soft drink container and exposure of its contents to the air, the oxygen in the air activates the bioluminescent reaction causing the soft drink to glow.

In each of the above embodiments, it is also contemplated that slowly-dissolving or time releasing microparticles, such as, but not limited to liposome
30 or isolated endosomes, may be included in the beverage that contains additional bioluminescent components. Microparticles may contain, for example, one or more luciferases, a phycobiliprotein, a green or blue fluorescent protein, a

-123-

luciferin or any mixture or combination thereof. Upon dissolution of the microparticle or release of the contents by other means, the contents of the microparticle are released into the beverage or other liquid, resulting, for example, in a change in the color of the emitted light the beverage, an change
5 in the color of the bioluminescent light and/or an increase in the intensity of the emitted light of the entire beverage or just a portion thereof. By selecting the appropriate microparticle(s), the release of one or more component of the reaction may be effected sequentially or concurrently. Thus, drinks in which several glowing colors are produced are contemplated herein. Multiple color
10 changes are effected by the appropriate selection of bioluminescence generating agents and/or fluorescent proteins.

For example, an appropriate time-released or slowly-dissolving microparticle containing a GFP or a phycobiliprotein may be added to a beverage containing the *Renilla* or aequorin bioluminescence generating system. Upon
15 dissolution or release of the fluorescent protein into the medium, the initial blue color of the glowing beverage is converted to another color, e.g., converted to a green color by the GFP. The inclusion of an additional microparticle containing a phycobiliprotein with an absorption maxima in the green spectra, in which the microparticle has been selectively designed to dissolve or release into the
20 beverage after release of the GFP, would result in the beverage once again changing color to, for example, red. The color of the beverage may be changed sequentially and repeated as many times as desired. The number of possible color changes will depend on the type of beverage, the desired colors and the duration of each color. Any beverage is contemplated for the color changes as
25 described herein, such as soft drinks, alcoholic beverages, juices and the like.

Alternatively, the color change may be designed to be effected in only a portion of the beverage. For example, microparticles that contain a fluorescent protein in combination with a composition that has a higher or lower specific density than the beverage [e.g., a saturated sucrose solution or any suitable
30 non-toxic, highly viscous solution having a higher specific density]. Dissolution or release of the contents of the microparticle results in the formation of a biphasic solution in which, for example, the top portion of the beverage glows

-124-

blue whereas the bottom portion of the beverage containing the released fluorescent protein [e.g., GFP or a phycobiliprotein] glows green, red or another color. The concentration of the fluorescent proteins and the selection of a higher or lower density liquid and percentages to be used herein may be
5 determined empirically by one of skill in the art.

The color of each layer may be changed sequentially or the color change may be effectively repeated in any order depending on the microparticle or macroparticle employed [e.g., inclusion by direct addition, time releasing particles or thermal or pH sensitive microparticles].

10 b. Ice

Ice containing bioluminescent components, such as lyophilized components or encapsulated components is contemplated herein. Upon addition to a liquid containing any remaining components or exposure to air, the contents of the ice will be released as they melt to produce a glow. The ice
15 may be in any shape or form. Examples of ice formations, include but are not limited to, geometric shapes, such as spheres and cubes; ice formations made from precast molds, such as figurines, icicles, popsicles; shaved ice, such as snow cones or imitation snow for recreational activity like skiing, sledding or snow-mobiling; ice sculptures, where the ice glows and/or in combination an
20 inanimate object frozen within the ice that glows. In addition, ice used as a surface for recreational ice skating or hockey is also contemplated herein.

The ice may contain one or more of the bioluminescence generating components. For example, the ingredients of ice may include a luciferin and/or luciferase, such as the *Cypridina* or *Vargula* luciferin and luciferase, which
25 requires oxygen for activation. Luciferases isolated from different specie that result in the production of light other than green or blue, e.g., *Aristostomias* or *Pachystomias* which emit red light, or additional components which alter the wavelength of the emitted light, e.g., a green fluorescent protein or a phycobiliprotein, used in conjunction with the luciferase are also contemplated
30 herein.

In practice, water is de-oxygenated, for example, by bubbling argon or nitrogen gas through it. The de-oxygenated water is used to mix all of the

-125-

bioluminescence generating components besides molecular oxygen. The mixing should take place under strict conditions in which air or oxygen is excluded, such as in a fume hood under nitrogen, in order to prevent exhaustion of the bioluminescence-generating components.

5 The water is placed in a tray, a vessel, a precast form of a particular shape or design, stored or maintained under an inert atmosphere and snap frozen using liquid nitrogen. The resulting ice is packaged in a sealed container under an inert atmosphere lacking molecular oxygen (e.g., argon or nitrogen). Upon exposure to air or a liquid containing dissolved oxygen, the ice glows.

10 Alternatively, one or more component of the bioluminescence generating system may be applied to the surface of the ice to initiate or re-generate the bioluminescent reaction. This method is particularly suitable for production of a glowing ice surface, such as an ice skating rink. The components of the reaction may be added to the water contained within the Zamboni ice cleaning
15 machine. The water from the machine is overlayed over the existing ice, which contains (or is first coated on the surface) at least one component of the bioluminescence generating system, as a thin coating of a composition that contains the other one or more component(s) of the bioluminescence generating system. As the two layers meet, the bioluminescence generating system is
20 produced or restored and the ice glows.

 Furthermore, microparticles containing additional bioluminescence generating components may be added to water prior to snap freezing. For example, microparticles containing or coupled to a phycobiliprotein or a green/and or blue fluorescent protein (GFP) can be produced. The additional
25 components may also be added to the surface of the ice after freezing. As with the beverages, described above, as the microparticles dissolve in the ice or as the ice melts, the fluorescent protein or other components are released. The presence of the fluorescent protein converts the wavelength of the light emitted from the surface or interior of the ice, which can include the components of a
30 bioluminescence generating system, thereby changing the color of the ice or liquid, for example, from blue to green or red. The addition of GFP also increases the intensity of the green light emitted about 2-5-fold. Thus, a

-126-

beverage containing such ice would not only change color as time proceeds but also glow more brilliantly. The light intensity of the liquid could also be enhanced by the addition of microparticles containing an appropriate luciferin or activator that upon dissolving would provide additional substrate to promote the bioluminescent reaction.

The components may also be combined with dry ice, which as it sublimates, will release the components that contact with moisture condensing in the air. This will produce a glowing fog for use, for example, in theatrical productions.

5. Jewelry, Clothing and Other Items of Manufacture

The bioluminescence generating systems can be used in combination with articles of manufacture that include jewelry, clothing, figurines and other such items. In particular, these items may be manufactured from matrix materials or from mixtures of the matrix material and other materials.

Alternatively, the matrix material may be coated on or impregnated in such articles. Bioluminescence generating reagents, particularly, luciferases can be linked to the matrix material. When a glow is desired the article can be contacted with composition containing the remaining components.

In addition, articles, such as clothing, particularly, T-shirts and sports gear, and paper items may be sprayed with two compositions, the first containing less than all of the necessary reagents and the second containing the remaining reagents.

In other embodiments, the article may be made of two vessels separated by a removable separating means, so that when desired components contained therein communicate and react resulting in bioluminescence.

6. Fountains

Numerous fountains and other water spraying apparatus and devices for use in such apparatus, in addition to those exemplified herein, are suitable for use in combination with the bioluminescence generating systems herein [see, e.g., U.S. Patent Nos.: 5,480,094; 5,472,140; 5,439,170; 5,402,836; 5,388,285; 5,381,956; 5,337,956; 5,288,018; 5,167,368; 4,852,801; 3,894,689; 3,889,880; 3,838,816; 3,820,715; 3,773,258; 3,749,311]. For

-127-

use herein, the fountains will be modified or adapted [see, e.g., EXAMPLES] so that jets of liquid containing bioluminescent will spew.

Fountains can be recharged, for example, by adding additional substrate and other activators. Spent substrate should be removed, such as by passing
5 the water through an affinity matrix specific for the oxidized substrate.

7. Non-Tobacco Cigarettes

Also contemplated herein is a novelty item that is shaped like a cigarette and that includes a bioluminescence generating system, which produces glowing "smoke" upon exhalation by the user. The user contemplated herein is
10 an adult former smoker who derived pleasure from blowing smoke rings. The toy cigarette can be made, for example, by placing, under oxygen-free conditions, a lyophilized, micropulverized mixture of the bioluminescence generating system components into liposomes, as described above, or other packaging material, such as porous plastic microspheres, made from TYGON or
15 other biocompatible non-toxic material. The liposomes (or other packaging) are selected to be of a suitable size to facilitate or permit passage into the bronchioles of the user. The liposomes are preferably on the order of 5-10 μM in diameter and are situated in a tubular delivery vehicle [the "cigarette"].

An example of an appropriate delivery vehicle is a thin glass vial
20 surrounded by plastic, similar to vials known to those of skill in the art that are used for storing amyl nitrate, betadine and benzoin solutions. The delivery vehicle is preferably shaped and sized like a standard cigarette. The plastic covering is preferably cylindrical with each end open to allow for the passage of air upon inspiration. The plastic covering is surrounded by a filter material that
25 allows passage of the liposomes from the device, but prevents the accidental inhalation of particulates, such as glass, if the vial is broken. Additional filters, having pore sizes of about 10 μM , are placed at either end of the "cigarette" as a further barrier to inhalation of any material larger than the liposomes. Solid plastic or similar material caps may be situated over each end of the "cigarette"
30 to prevent the liposomes contained therein from falling out. These caps would be removed just prior to use of the "cigarette", to permit the free flow of air

-128-

through the device. The liposomes are preferably held within the delivery vehicle by friction.

In operation, the user will inhale the liposomes or similar encapsulating vehicles, which release their contents upon contacting the lungs. The humid
5 environment of the bronchial tree then provides the water and oxygen necessary to complete the bioluminescence reaction. Upon exhalation, the air leaving the users lungs is illuminated, providing glowing "smoke". If the packaging apparatus chosen for the bioluminescence generating components is a porous plastic microsphere, such as TYGON, then the bronchiolar-ciliary
10 transport mechanism of the body will transport the spent microspheres out of the bronchia and into the digestive system. Because plastic is biologically non-reactive, the microspheres will be passed from the body through normal excretory pathways without eliciting an immune or toxic reaction.

8. Fish and Fish Food

15 Also contemplated herein are genetically engineered fish that express luciferin or, preferably luciferase, and food therefor. Such fish may be produced may any method known to those of skill in the art for preparation of transgenic fish. For example, to produce the fish, fish eggs are transfected with a gene
20 encoding a particular luciferase and any other genes or regulatory sequences necessary to direct the fish to manufacture and express the luciferase, using methods known to those of skill in the art. Methods for generating transgenic fish are known [see, e.g., U.S. Patent Nos. 5,512,421, 5,510,099, 5,489,742, 5,476,779, 5,416,017 and 5,166,065; see, also, Ozato *et al.* (1986) *Cell Differ. Devel.* 19:237-244, Inoue *et al.* (1990) *Cell Differ. Devel.* 29:123-128,
25 Rokkones *et al.* (1989) *J. Comp. Physiol. B* 158:751-758, and Guyomard *et al.* (1989) *Biochimie* 71:857-863, which describe preparation of transgenic medaka, medaka, salmon and trout, respectively]. Transgenic fish of numerous species have been prepared, providing the skilled artisan with a variety of
30 procedures for developing transgenic fish. Thus, using a transfection methods known to those of skill in the art and methods for introduction and expression of luciferase, transgenic fish that express a luciferase are prepared. Desirably, the fish express the luciferase on cell surfaces, such as by incorporating the

-129-

luciferase into DNA encoding a membrane-spanning protein, or express the luciferase so that it is secreted into the digestive systems or mouths of the fish.

The resulting fish are fed food containing an appropriate luciferin or luciferins [or luciferase] and any additional bioluminescence generating reagents required. Typically, the luciferin will be present in the fish food at concentrations ranging from about 1 part per million (ppm) to about 1 part per 10, weight/weight. As the luciferin, bioluminescent activators and other system components come in contact with the luciferase expressed by the transgenic fish, the fish or selected organs or tissues will glow. For example, if the luciferase is expressed on the tissues lining the transgenic fish's mouth, then its mouth will light up as it eats the fish food. Similarly, if the fish transfected with the luciferase gene is translucent, then the digestive organs, particularly the stomach, will glow as the bioluminescence generating components come into contact and complete the bioluminescent reaction. The selected luciferase/luciferin systems should be one that is resistant to conditions, such as the acidic pH of the digestive system, in the fish.

Thus, for purposes herein, fish food that includes luciferin, preferably in lyophilized form, particularly, *Renilla* coelenterazine and *Vargula* luciferin, is provided. The transgenic fish that express luciferase or luciferin are also provided.

9. Plant food

Plant food, containing a luciferase or luciferin, for use with transgenic plants that express a luciferin or luciferase. For example, transgenic plants that express a luciferase are known [see, e.g., U.S. Patent Nos. 5,464,758, 5,436,392, 5,432,081, 5,412,085, 5,362,865, 5,268,463, and 5,015,580]. When treated with [i.e., fed] plant food containing a luciferase and other needed components of the bioluminescence generating system, these plants glow.

Plant food containing one or more components of the bioluminescence generating system, preferably a luciferin, is provided herein for administration to transgenic plants that express a luciferase. The plant food containing a luciferin and any necessary activators may be in the form of any composition that is

-130-

typically applied to a plant to promote or maintain growth [e.g., see U.S. Patent Nos. 4,016,880, 4,711,659, 4,804,403, 5,547,486, 5,553,853, RE 35,320, and RE 31,801]. The luciferin and any activators may be added directly to the plant food mixture or housed in a separate compartment and added to the plant food immediately prior to use. The plant food may be applied to the soil, sprayed on the foliage of the plant or any combination thereof.

F. Cartridges for loading or reloading the novelty items

In order to effectively charge, recharge or refill the bioluminescence generating systems that are part of the novelty items, a variety of cartridges are contemplated herein. It is to be appreciated that any charging device discussed herein is capable of either initially charging a novelty item, such as a squirt gun, or recharging such a novelty item once one or more component(s) of the bioluminescence generating system is depleted. Exemplary embodiments are set forth in FIGURES 28-34 and described in EXAMPLE 14 below.

15

EXAMPLES

The following examples are included for illustrative purposes only and are not intended to limit the scope of the invention.

EXAMPLE 1

Dual Chamber Fluid Dispensing Apparatus - Toy Water Gun

20

An exemplary embodiment of the dual chamber fluid dispensing apparatus is a toy water gun as illustrated in FIGURES 1 through 3. The following description of that preferred embodiment is made with reference to those figures. The toy water gun includes two housings [or chambers] 10, 12 that conveniently may be constructed of injection-molded plastic or other suitable material. The two housings 10, 12 are affixed, such as glued, heat sealed or by other such means, along a median seam 46 to form the body of the water gun. See especially FIGURES 2 and 3.

25

In operation, one housing 10 contains a mixture having less than all the components necessary for generating bioluminescence and the other housing 12 contains a mixture having the remaining components or the remaining components, save the bioluminescent activator. Depression of the trigger 14 pushes the pistons 26, 36 into their respective cylinders 38, 48 compressing

30

-131-

the trigger springs 28, 43 and pushing the contents of the cylinder through the second check-valve 34, into the mixing chamber 20 and out the nozzle orifice 22. As the trigger 14 is released, the trigger springs 28, 43 return to their relaxed state pushing the pistons 26, 36 out of the cylinders 38, 48 creating a vacuum therein which pulls the contents of the housings 10, 12 past the first check-valves 33, 32, respectively and into the cylinders 38, 48 respectively. Pumping the trigger, that is repeatedly depressing and releasing it, moves the mixtures contained in the housings through the gun and out the nozzle orifice 22.

10 As the mixtures leave the cylinders 38, 48, they enter the mixing chamber 20, via the conduit means 44 and second check-valve 34. Luminescence begins either upon mixing of the components or as the mixed composition contacts the air upon expulsion from the toy gun. The mixtures may be powdered, such as those produced by lyophilization, or they may be liquid. If powdered, water can be added prior to use.

15 The housings 10, 12 may be filled and refilled through the filling caps 17, 19, respectively, located at the top of each housing. A trigger 14 is attached to a trigger guide 13 which serves to guide the trigger 14 towards two piston assemblies 25. Depression of the trigger 14 activates the two piston assemblies 25. This causes a portion of the composition located in each housing 10, 12 to move through the water gun into a mixing chamber 20 and out a nozzle orifice 22. The preferred embodiment illustrated has a trigger guard 15 which helps prevent accidental discharge of the gun and makes the gun appear more realistic. The sighting aids 21, 23 aid in aiming the toy gun and also serve to make the gun appear realistic.

20 Only one of the two piston assemblies 25 is completely illustrated, and it is visible in FIGURE 1. The other piston assembly is adjacent to and, in this preferred embodiment, identical to the one illustrated. These assemblies operate by substantially identical means and are activated by depression of the single trigger 14. The piston assembly 25 includes a piston 26 which passes through a sealing o-ring 30, is connected to a trigger spring 28 and moves within a cylinder 38. The piston assembly also includes a spring retainer 40

-132-

that secures one end of the trigger spring 28 to the end wall of the cylinder. The cylinder 38 is in communication with one end of a pick-up tube 18 and lies about perpendicular to the pick-up tube 18. The cylinder 38 also communicates with the mixing chamber 20 via conduit means 44.

5 In the sectional views of the water gun, illustrated in FIGURES 2 and 3, portions of the second, adjacent piston assembly are visible. Namely, the second trigger spring retainer 42 and trigger spring 43 are visible in FIGURE 2, and the second piston 36 is visible in FIGURE 3.

Referring to the piston assembly 25 illustrated in FIGURE 1, the piston 10 26 passes into the water gun through the sealing o-ring 30 and into the cylinder 38. The trigger spring 28 is attached by one end to the piston and by its other end to the spring retainer 40 located at the opposite end of the cylinder from the piston. As the trigger 14 is depressed, the piston 26 moves into the cylinder 38 and through the sealing o-ring 30. This compresses the trigger 15 spring 28 within the cylinder 38. As the trigger 14 is released, the trigger spring 28 expands, returning it and the piston 26 to a resting position.

Because the piston 26 is sealed within the cylinder 38 by the sealing o-ring 30, its repeated movement causes the air within the cylinder to be displaced thereby creating a vacuum within the pick-up tube 18 of the water 20 gun. The composition located in the housing 12 is then drawn into the pick-up tube 18, past a first check valve 32, past the trigger spring 28, past a second check valve 34, into the mixing chamber 20 and out the nozzle orifice 22 via an outlet tube 24. The second check valve 34 is illustrated with a spring 25 mechanism 35 which serves to maintain the check valve 34 in a closed position isolating the piston assembly cylinders 28 and conduit means 44 from the mixing chamber 20, allowing a vacuum to form within the gun during operation.

The same mechanism operates to simultaneously withdraw composition from the complementary housing 10 into the mixing chamber 20 via a pick-up tube 16. Thus, referring to FIGURES 2 and 3, the action of the piston 36 within 30 its cylinder compresses the trigger spring 43 against the spring retainer 42 creating a vacuum within the pick-up tube 16 and moving some of the

-133-

composition located in the housing 10 through the pick-up tube 16 into the mixing chamber 20 and out the nozzle orifice 22.

As illustrated in FIGURE 2, the two pick-up tubes 16 and 18 originate in the housings 10 and 12, respectively. Each pick-up tube 16, 18 includes a check valve 32 and 33, respectively. The first check valves 32, 33 serve to prevent fluid flow from the piston assembly cylinders 38, 48 back into the housings 10, 12. The single second check valve 34 prevents the mixed compositions from flowing out of the mixing chamber 20 back into the piston assembly cylinders 38, 48.

Thus, repeated depression of the trigger 14 increases the pressure within the gun, thereby filling the mixing chamber 20 with a combination of the compositions located in the two housings 10, 12, then forcing the mixed compositions through the outlet-tube 24 and out the nozzle orifice 22.

EXAMPLE 2

Dual Chamber Fluid Dispensing Apparatus - Gas-Charged Toy Water Gun

In contrast to the above-described toy water gun, the gas-charged toy water gun operates using pressurized gas, rather than the piston assembly, to move the bioluminescent mixtures through the system. A preferred embodiment of this device is illustrated in FIGURES 4 and 5. In this embodiment the butt of the water gun 86 houses the two chambers 64, 74 that contain the bioluminescence generating system components. Further, the butt 86 is detachable and thus readily replaced.

To pressurize the gun for operation, a CO₂ or air [or other suitable gas or mixtures thereof] canister 50 is inserted into a gas chamber 56 as shown. A screw cap 52, located at the base of the gas chamber, secures the canister 50 into the chamber 56. As the screw cap 52 is tightened, the CO₂ or air canister is forced against a piercing pin 54, thereby releasing CO₂ or air into the gas chamber 56 and charging the water gun for use.

Depression of a trigger 58 aligns a gas cock 60 with each of two gas conduits 62 and 72 and the gas chamber 56. With the gas cock 60 so-aligned, CO₂ gas or air enters the gas conduits 62 and 72 and passes into the two chambers 64 and 74. The pressure of the gas forces some of each mixture out

-134-

of the chambers 64, 74, via composition pick-up tubes 66, 76. The composition pick-up tubes 66, 76 are connected to outlet conduits 78 and 80 through which the mixtures pass into a mixing chamber 68, and are combined. The continued pressure of the CO₂ gas or air forces the combined mixture from
5 the mixing chamber 68 and out a nozzle orifice 70.

The gas conduits 62, 72 and outlet conduits 78, 80 are housed within the main body of the water gun and extend beyond it in the region where the butt 86 of the gun is attached to the main body. The composition pick-up tubes 66, 76 are completely within the butt of the water gun 86. In order to obtain a
10 leak-free assembly of the butt of the gun to the main body, the gas conduits 62, 72 and outlet conduits 78, 80 each pass through a leak seal 88 located within the butt of the gun 86. The leak seals 88 may be constructed of rubber or similar soft sealing material and should be covered, either with a removable cap or with a material susceptible to piercing, to prevent spillage of the
15 compositions contained therein.

In attaching the butt of the gun 86 to the main body, the gas conduits 62, 72 and outlet conduits 78, 80 pass through the leak seals 88 forming a tight seal between the tubes and the butt of the gun. Also, as can be seen in FIGURE 4, the delivery tubes 78, 80 set within the composition pick-up tubes 66, 76 at the point where they enter the butt of the gun. This permits fluid
20 communication between the composition pick-up tubes 66, 76 and the outlet conduits 78, 80.

Additional features of the preferred embodiment, as illustrated in FIGURES 4 and 5 include retaining hooks or latches 90, 92 and 94 positioned
25 on the main body of the water gun and used to secure the butt of the gun to the main body. Additionally, the two chambers 64 and 74 can be configured with filler caps 82 and 84, as illustrated, thereby allowing them to be refilled as an alternative to replacement.

It will be appreciated that the gas used to operate the gas-charged fluid
30 dispensing apparatus described herein may be other than carbon dioxide. Any gas or mixture of gases, such as air or mixtures of O₂ and CO₂, that operates in the same manner may be used.

-135-

EXAMPLE 3**Dual Chamber Fluid Dispensing Apparatus - Gas-Charged**

FIGURES 6, 7 and 8 illustrate a preferred embodiment of a gas-charged fluid dispensing apparatus as provided herein. This embodiment may be adapted for particular uses; for example, it may be housed within a decorative sculpture, thereby functioning as a decorative water fountain. Alternative embodiments incorporating this embodiment are illustrated in FIGURES 4 and 5 [EXAMPLE 2] and FIGURES 9 and 10 [EXAMPLE 4].

Referring to FIGURES 6 and 7, the gas-charged dual chamber dispensing apparatus has two chambers 100 and 102. In a preferred embodiment as illustrated, the two chambers 100 and 102 are refillable via filler caps 104 and 106 located on the upper end of the chambers. A gas chamber 108 is situated about equidistant from the two chambers and communicates with each of them via gas conduits 117. The gas conduits 117 end at gas inlets 118 that communicate with the two chambers 100, 102. The gas inlets 118 are positioned near the upper end of the chambers 100 and 102. While one gas inlet 118 is depicted, it is understood that each chamber 100, 102 has such an inlet.

A gas canister 112 fits into the gas chamber 108, being secured therein by a screw cap 110. Screwing the screw cap 110 tightly into place forces the top of the gas canister 112 against a piercing needle 114, thereby releasing gas into the gas chamber 108. A gas control valve 116 is used to control the flow of the gas from the gas chamber 108 into the gas conduits 118.

A mixing chamber 124 is also situated about equidistant from the two chambers 100 and 102 and communicates with them via outlet conduit means 122, such as fluid ports. The outlet conduits [fluid ports] 122 are located sufficiently near the bottom of the chambers 100 and 102 to permit the chamber contents to empty. Near the lower end of the two chambers 100, 102 are fluid outlets that connect to the fluid ports 122. Blow-out plugs 120 prevent the compositions contained therein from leaving the chambers and entering the fluid ports before activation of the device. One-way valves or similar devices can be substituted for the blow-out plugs 120. The mixing

-136-

chamber 124, having bottom inlets and a top outlet, is associated with a nozzle 126, which may be attached or integral to the mixing chamber. Optionally, the nozzle 126 has a closure cap 132 distal to the mixing chamber 124.

In a preferred embodiment, illustrated in FIGURES 6, 7 and 8, an upper support 130 is shown. This upper support 130 spans the upper ends of both chambers 100 and 102 and over the top end of the gas chamber 108. The gas conduits 118 and inlets 117 are within the upper support 130. The nozzle 126 passes through the upper support 130 and is supported thereby.

Also illustrated in this preferred embodiment, is a base support 123 that spans across the lower ends of the chambers 100 and 102 and that is integral to the mixing chamber 124. The fluid ports 122 connecting the chambers 100 and 102 with the mixing chamber 124 are contained within the base support 123 [see, FIGURES 6 and 7].

To operate the basic dual chamber gas-charged fluid dispensing apparatus, a gas canister 112 containing gas under pressure, for example pressurized CO₂, is inserted into the gas chamber 108. The screw cap 110 is tightened, forcing the gas canister against the piercing needle 114. As gas escapes from the canister, it fills the gas chamber. The gas control valve 116 is opened, permitting the gas to enter the gas conduits 117 and pass into the chambers 100 and 102 through the gas inlets 118.

The pressure of the gas in the chambers pushes the mixtures therein against the blow-out plugs 120, or through the one-way valves, out the fluid outlets, into the fluid ports 122 or other fluid conduit means, and into the mixing chamber 124 via the bottom inlets. In the mixing chamber 124, the mixtures combine, while the continued pressure from the gas propels the combined mixtures through the nozzle 126 and out the nozzle orifice 128.

EXAMPLE 4

Dual Chamber Fluid Dispensing Apparatus and Volcano-Shaped Gas-Charged Apparatus

FIGURES 9 and 10 illustrate a preferred embodiment of the gas-charged fluid dispensing apparatus illustrated in FIGURES 6, 7 and 8 and described above. In this embodiment, each chamber has a generally half-conical shape, or other suitable shape [depending upon the intended use], such that, when

-137-

attached they form, in this embodiment, a volcano-shaped apparatus. The gas chamber 160 and gas conduit 162 are defined by the inner walls 176, 178 of the chambers 150, 152, respectively. Similarly, the mixing chamber 170 and nozzle 172 are defined by the inner walls 176, 178 of the chambers 150, 152, respectively.

As in the apparatus, FIGURES 6, 7 and 8, a gas canister 154 is housed in the gas chamber 160 and is activated by tightening a gas screw-cap 156 which forces the gas canister 154 against a piercing needle 158 thereby releasing the gas into the gas chamber 160. The gas enters the gas conduits 162, forces out the blow-out plugs 164 and passes into the chambers 150, 152 via the gas inlets 166. Alternatively, a control valve, or other suitable control means, is situated between the gas chamber and gas conduits or within the gas conduit means and used to control the flow of gas into the gas chambers.

Within the two chambers 150, 152, one containing, for example, up to all except one component necessary for the bioluminescence generating reaction and the other the remaining component(s), the gas forces the bioluminescence generating mixtures into the mixing chamber 170. Blow-out plugs 168, situated between the chambers 150, 152 and mixing chamber 170, prevent the bioluminescence mixtures from entering the mixing chamber 170 until the apparatus is activated. The continued pressure of the gas forces the combined mixtures from the mixing chamber 170 through the nozzle 172 and out the nozzle orifice 174.

This apparatus is particularly designed for use as "fireworks" configured in the shape of a volcano. As the combined bioluminescent mixtures are forced from the apparatus into the air, they glow in a similar manner to traditional fireworks.

Alternatives to the specific embodiment described herein are likewise contemplated. For example, blow-out plugs may be replaced by one-way or control valves. Manually operated valves may be replaced by electronically or mechanically controlled valves. The apparatus does not have to be in the shape of a volcano, but may be formed into any shape, such as animals, humans, plants or abstract forms.

-138-

In another alternative embodiment, not illustrated, the nozzle 172, through which the mixed bioluminescent composition exits from the apparatus, is shortened, moving the mixing chamber 170 closer to the nozzle orifice 174. This is particularly appropriate where the bioluminescence generating system used in the apparatus produces short bursts of light or is quickly exhausted once activated, such that the bioluminescent components are preferably kept separated until just before expulsion from the apparatus. In such an alternative embodiment, outlet tubes (or conduits) may be provided that maintain the bioluminescence generating components separate until just before expulsion from the apparatus. The outlet tubes illustrated in FIGURES 23, 24 and 26 and described in EXAMPLE 11, could likewise be employed in this alternative embodiment.

EXAMPLE 5

Compressible Dispensing Apparatus - Lotion/Cream container

FIGURE 11 illustrates a preferred embodiment of a compressible dispensing apparatus particularly useful for dispensing waxy, pasty or semi-solid compositions such as body lotions or finger paints. In this embodiment, the container, preferably a tube, has two chambers 200, 202. In certain embodiments, within one chamber are all, except for one or more, components of the bioluminescence generating system, and in the other chamber are the remaining components. The composition, such as body lotion or cream is in one or, preferably, both chambers. The container is preferably constructed of a pliable collapsible or compressible material, such as plastic, plastic/metal laminate or similar collapsible composite, which can be squeezed by hand. Numerous such tubes are known to those of skill in this art are used to dispense products such as finger paints, toothpaste, gels, lotions and other such items.

A membrane seal 204 at the top end [dispensing end] of the container prevents the contents of the chambers from mixing. The cap apparatus 206 of the container has a dispensing cap at the top 210 and is configured such that a space 208 exists between the membrane seal 204 and the dispensing cap 210, which space acts as a mixing chamber 208.

-139-

Thus, to operate the lotion/cream container, the membrane seal 204 is punctured, or otherwise opened, and a portion of the contents of the two chambers 200, 202 are simultaneously squeezed into the mixing chamber 208 by applying pressure to the container. The dispensing cap 210 is removed and the contents of the mixing chamber 208 are squeezed out the dispensing orifice 212. The mixed composition may be dispensed by squeezing the container or by squeezing the cap apparatus 206. Alternatively, a plunger/syringe device [not illustrated] may be attached to the dispensing orifice and the mixed cream composition thereby withdrawn from the mixing chamber 208.

- 10 The membrane seal, 204 situated between the chambers 200, 202 and the mixing chamber 208, functions to prevent the contents of the mixing chamber 208 from returning into either of the chambers 200, 202. It may be constructed, for example, of a thin layer of rubber, plastic, or other suitable porous material, having a small hole or holes through which the contents pass.
- 15 As the sides of the container are compressed, portions of the contents of the chambers are forced through the holes in the membrane and into the mixing chamber, with the membrane returning to its "sealed" state once the pressure is relieved. A one-way valve or similar device may be substituted for the membrane seal 204, provided it too prevents the contents of the mixing
- 20 chamber 208 from flowing back into either of the chambers 200, 202.

EXAMPLE 6

Bottle/Bladder Apparatus - Bubble Composition Bottle

- FIGURES 12 and 13 illustrate a preferred embodiment of the bottle/bladder apparatus adapted for use with bioluminescent bubble compositions. This bubble composition bottle has a bladder 300 positioned within it and held in place, in the neck 302 of the bottle, by friction. A collar 304 is positioned on the neck of the bottle 302, preventing the cap 306 from being screwed completely onto the top of the bottle. The cap 306 contains a plunger 308 which operates to push the bladder 300 into the body of the bottle
- 25 when the collar 304 is removed and the cap 306 is screwed down tightly. Upon entering the body of the bottle, the bladder is pierced by a piercing pin 310 located on the bottom of the bottle; thereby releasing the contents of the
- 30

-140-

bladder into the bottle. FIGURE 13 shows the bottle with the collar 304 removed, the cap 306 screwed on tightly, and the bladder 300 collapsed within it.

- Component(s) [less than all] of the bioluminescence generating reaction
- 5 are contained in the bladder. The components may be in the form of a solution, suspension, suspended particles, or particles. Prior to use the bottle may be gently agitated. The particles may be time release capsules that release their contents upon exposure to the bubble composition or from which the contents diffuse upon mixing of the contents of the bladder with the bubble composition.
- 10 The remaining component(s), such as Ca^{2+} or ATP, are contained in the bubble composition 314, which is preferably a mild bubble forming composition. Selection of the bioluminescence generating composition depends upon the selected bubble composition and also the desired action. In other embodiments, remaining components, such as ATP, FMN, a flavin reductase or other
- 15 component that may be somewhat sensitive to the bubble composition, of the bioluminescence generating system may be added to the bubble composition just prior to use.

- The collar 304 of the bottle is adapted with a bubble blowing ring 312, with arm, integral thereto. Thus, the collar 304 is removed, the bladder 300
- 20 pierced within the bottle as described and the bubble blowing ring 312 dipped into the mixed composition, withdrawn and bioluminescent bubbles blown. A standard bubble blowing wand [arm with ring] may be used and/or provided in place of that depicted in FIGURE 12.

- The bladder 300 should be constructed of a material that can be pierced
- 25 by a piercing means, such as a needle or pin, made for example of thin plastic or other polymeric film. Preferably the distance from the base of the neck of the bottle to the tip of the piercing needle is less than the length of the bladder, so that the bladder will be pierced by the needle before its top edge clears the base of the neck of the bottle.

-141-

The bottle 316 may be fabricated of any material ordinarily used for dispensing bubbles. It may be transparent or translucent to the bioluminescent light so that any glow in the bottle can be seen.

EXAMPLE 7

5 Container/Bladder Apparatus - Beverage Can

An exemplary of the container/bladder apparatus, illustrated in FIGURE 14, is suitable for use as a beverage can or bottle. It is configured similarly to a pop-top aluminum drink can but has a bladder 400 under the top which is pierced by the pop-top 402 when the can is opened. The bladder may be
10 centered under the top of the can, as illustrated, may be off-center or may be attached to the top and side of the can. Positioning of the bladder is chosen such that it may be readily pierced and its contents mixed with the contents of the container 404. Thus, the bladder should be sufficiently thin that the pop-top 402 is able to pierce it allowing its contents to mix with the contents of the
15 beverage can. The can is preferably fabricated of translucent or transparent material such that the glowing beverage can be observed.

An alternative embodiment includes a beverage container with two pop-tops, in which one is designed, such as including by having a point at the end, to puncture the bladder and the other can be a typical pop-top that is used for
20 emptying the contents of the can, such as by pouring into a glass or into a person's mouth. Since the novelty of these items resides in the resulting glow in the beverage, the beverage should be poured into a glass, or the container should be transparent or translucent to the bioluminescent light.

Another alternative contemplated herein includes a mesh filter
25 surrounding the bladder and functioning to prevent small pieces of the ruptured bladder from mixing with the contents of the can. The contents of the bladder are in aqueous composition; thus, the density of the mesh of the filter that is permeable to the luciferase and other bioluminescence generating components.

Similarly, embodiments employing other opening types are contemplated
30 herein. For example, the bladder and corresponding container opening may be pierced with a point-ended straw, or other sharp device. Likewise, the dispensing opening [which may be the same as the bladder-associated opening]

-142-

may be covered with a thin aluminum pull tab. Critical to the operation of the can/bladder combination is that the bladder preclude mixing of the contents of the bladder and the can until the consumer takes action to rupture the bladder.

The bladder may be constructed of any material which is amenable to being pierced as described and is preferably constructed of a material which will rarely if ever break into small pieces when pierced. For example, aluminum foil with a thin plastic coating, when pierced with a point-ended straw in particular, will rarely break into small pieces. The body of the can may be constructed of aluminum, plastic or similar material and is preferably constructed of a translucent material such as plastic.

The bladder includes up to all except for one component of the bioluminescence generating system, and the beverage includes the remaining component(s). For example, the bladder includes the aequorin photoprotein [typically 0.1 to 1 mg or more] in a composition containing a chelator to prevent activation of the photoprotein, and the beverage contains Ca^{2+} .

EXAMPLE 8

Single Use, Dual Chamber Fluid Packaging Apparatus

FIGURE 15 illustrates an exemplary embodiment of the single use, dual chamber fluid packaging apparatus or bottle described generally above, and the following description is with reference to that FIGURE. The bottle has a first chamber 500 which contains a composition including one or more, up to all but one, of the bioluminescence generating system components. Below the first chamber and operatively attached thereto, is a second chamber 502, containing the remaining bioluminescence generating system components in composition. In the embodiment illustrated, the first chamber 500 is seated in the second chamber 502 along a side seam 506 and a separation membrane 504.

The second chamber 502 is constructed of pliable material, such as plastic, that is convoluted 508 such that it can be readily collapsed against the bottom of the first chamber in the direction of the illustrated arrow. When collapsed in this way, the force of the composition contained within the second chamber ruptures the separation membrane 504A, permitting the compositions to mix. Once mixed, the compositions begin to illuminate.

-143-

This apparatus, as illustrated, is adapted for use with bubble-blowing compositions in that the cap of the bottle 510 has a bubble-blowing wand 512 attached to it. Alternatively, the apparatus may be used with a beverage and, if so used, would not have the illustrated bubble-blowing wand 512.

- 5 Another embodiment of this apparatus, not illustrated, but contemplated herein, is a bottle in which the second chamber may be secured to the first chamber or to itself in a collapsed position. For example, the second chamber can be adapted with a hooking mechanism on its exterior such that it can be hooked to itself when collapsed.

10

EXAMPLE 9**Cap Apparatus for Use with Composition Vessels**

FIGURES 16, 17 and 18 & 19 illustrate three exemplary embodiments of the cap apparatus for use with composition vessels.

A. Cork Cap Apparatus

- 15 Referring to FIGURE 16, a cork 600, situated within the neck 602 of a bottle and having a rupturable capsule 604 housed within it, is illustrated. In this embodiment, the bottom edge of the cork 600 is substantially U-shaped such that a pocket is formed. Contained within the pocket is the capsule which is in communication with the screen 608 which is permanently attached to the
- 20 bottom of the cork. The capsule contains one or more, up to all but one, of the bioluminescence generating system components. A plunger assembly 606 is positioned, partially within the cork, such that depression of the plunger assembly 606 results in rupture of the capsule and release of its contents into the composition within the bottle. The screen 608 or other filtering device
- 25 prevents fragments of the ruptured capsule from entering the vessel.

The plunger assembly 606, illustrated in FIGURE 16, has a top portion 610 integral to the stem portion 612. Pressing on the top portion 610 forces the stem 612 to move within the cork 600 and against the capsule 604, thereby rupturing the capsule and releasing its contents into the vessel.

-144-

FIGURE 17 illustrates an alternative embodiment of the cork cap apparatus. In this embodiment, the cork 700 is illustrated as being about flush with the top of the neck 702 of the bottle. The plunger apparatus 704 is adapted with a finger ring 706 for ease in handling. The stem 708, which may be pointed or blunt or any combination thereof, is threaded 710. In operation, the plunger assembly 704 is screwed into the cork 700 where it contacts a capsule 712, rupturing it and releasing its contents against the screen 714 or filter. The capsule will preferably contain powdered or otherwise condensed bioluminescence generating components.

It will be appreciated that the cork cap alone, with encapsulated compositions encased within and screen or filter attached thereto, is an alternative embodiment of the two illustrated cork cap apparatus. In this embodiment a corkscrew may be employed to rupture the capsule and to remove the cork cap.

B. Screw-top Cap Apparatus

FIGURES 18 and 19 illustrate another exemplary embodiment of the cap apparatus for use with composition vessels. FIGURE 18 shows the cap apparatus before activation or engagement. This is particularly adapted for use with a wine or champagne bottle, and includes encapsulated bioluminescence generating system components.

This embodiment generally includes a bottle-shaped vessel with a collar 802 situated about the neck 804 of the bottle and a cap 800 attached to the top of the bottle just above the collar 802. The neck of the bottle 804 is threaded to receive the screw-on cap 800. The collar 802 is situated such that a lower portion of the threads on the neck of the bottle 804 are covered thereby preventing the screw-on cap 800 from being completely attached to the bottle. Enough threads remain exposed on the top of the bottle such that the screw-on cap 800 is securely, though not completely, attached to the top of the bottle.

The screw-on cap 800 has a plunger 806 integral thereto which extends into the bottle neck 804. A screen or filter assembly 812 is attached to the interior of the bottle within the bottle neck 804. A membrane system 808, 810 or capsule or similar composition packaging is situated between the plunger 806

-145-

of the screw-on cap 800 and the screen/filter assembly 812. In operation, the collar 802 is removed, for example by removing the screw-cap 800 and lifting off or screwing off the collar 802 or by tearing off the collar 802, and the screw-on cap 800 is tightened against the top of the bottle. This forces the
5 plunger 806 through the membranes 808, 810, rupturing them and releasing the composition(s) contained therein. The composition(s) pass through the screen assembly 812 and are mixed with the contents of the bottle. FIG. 19 illustrates the cap apparatus fully engaged with the membrane system ruptured.

In the embodiment illustrated, the screen assembly 812 is attached along
10 the interior of the neck of the bottle 804 as well as across the interior of the neck, thereby forming a basket within which the membrane system 808, 810 sits. Alternatively, the screen assembly can be attached around the circumference of the bottle neck only and not along its sides to the top of the bottle, as illustrated.

15 The precise height of the collar 802 will be determined by the length of the plunger 806 and location of the membrane system 808, 810. The height will be sufficient to prevent the plunger 806 from being engaged through the membrane system 808, 810 prior to activation by the user, while permitting the screw-on cap 800 to be secured to the top of the bottle.

20 The membrane system 808, 812 contains one or more, up to all but one, of the bioluminescence generating system components. Typically the components will include the luciferase and luciferin in lyophilized form.

The illustrated embodiment is shown and described as attached to a bottle. It will be appreciated, however, that the vessel to which the cap
25 apparatus is attached may be a can, tube or any other container. Additionally, the embodiment is exemplified and illustrated with reference to the neck of the bottle. It is not necessary that the vessel have a "neck" for the cap apparatus to function. For example, if the vessel does not have a neck, other means may be employed to hold the collar in place below the screw-on cap, such as, a lip
30 formed on the container, below the threads, to stop the collar at an appropriate point.

-146-

With respect to these three embodiments of the cap apparatus adapted for use with composition vessels, the stem of the plunger assembly is short enough not to pierce the screen or filter device, yet long enough to effectively rupture the capsule, membrane or other packaging once engaged. The

5 bioluminescence generating system component(s) contained within the cap apparatus may be powdered or in composition or in any form amenable to addition to the composition contained within the vessel. Additionally, the components may be contained in more than one capsule, membrane or other packaging. In this case, the component packages are adjacently positioned,

10 such that each is ruptured by engagement of the plunger. Preferably, the remaining components required for completion of the bioluminescent reaction are contained within the vessel within any composition. These embodiments are particularly adapted to use with wine or champagne or other beverage.

EXAMPLE 10

15 Spray container apparatus

FIGURES 20, 21 and 22 illustrate an exemplary embodiment of a spray container provided herein. This container is typically a can apparatus intended for use in combination with the bioluminescence generating systems as described herein. The following description of that exemplary embodiment is

20 made with reference to those figures.

The spray container apparatus includes two portions, a top housing portion 902 and a bottom plunger portion 904. The contents of the top housing portion 902 include all, except one or more, of the components of a bioluminescence generating system. The top housing portion 902 also contains

25 a conduit 912 operatively attached to a spray nozzle 920.

The top housing portion 902 of the spray container apparatus is adapted to receive the bottom plunger portion 904. In this embodiment, the top housing portion 902 and bottom plunger portion are threaded 903 and 910, respectively, such that the bottom plunger portion 904 can be screwed onto the

30 top housing portion 902. [See FIGURE 21, illustrating the spray container apparatus with the bottom plunger portion fully screwed into place.]

-147-

The top housing portion 902 additionally has a pocket 926 defined by a conical side wall 922 and a top wall/rupture membrane 916. The pocket 926 is adapted to receive a pellet 906, that contains the remaining component(s) necessary for generating bioluminescence.

5 The bottom plunger portion 904 of the spray container apparatus has a plunger 914 shaped and situated such that it fits into the pocket 926 of the top housing portion 902 when the bottom plunger portion 904 is screwed tightly in place. The bottom plunger portion 904 is adapted with an angular seal 918 that serves to seal the bottom plunger portion 904 against the top housing
10 portion 902 thereby preventing leakage of the contents of the spray container apparatus.

In operation, the pellet 906 is placed into the pocket 926 of the top housing portion 902 where it contacts the top wall/rupture membrane 916 of the pocket 926. The bottom plunger portion 904 is then screwed onto the top
15 housing portion 902, thereby forcing the plunger 914 against the pellet 906, which presses against the top wall/rupture membrane 916 of the pocket 926, rupturing the same. The pellet dissolves or is suspended in the composition contained in the top housing portion 902 and the composition glows. Depression of the spray nozzle 920 releases the contents of the spray container
20 apparatus.

Alternative embodiments of this spray container apparatus will be appreciated. For example, the pellet 906 may be a vessel containing the necessary bioluminescence generating components that is fabricated from material that can dissolve or that will be suspended in the composition
25 contained in the top housing portion 902 of the spray container apparatus 900 or that will release its contents upon contacting the composition, such as by passive diffusion. Examples of such material include, but are not limited to liposomes, gelatin, soluble paper and other such materials that will dissolve or release contents into aqueous compositions. Further, the spray container
30 apparatus 900 can be adapted such that the bottom plunger portion 904 snaps onto the top housing portion 902, rather than screwing into place.

-148-

EXAMPLE 11

Alternative Embodiment of Dual Chamber Fluid Dispensing Apparatus - Toy Water Gun

Another embodiment of the dual chamber fluid dispensing apparatus is a
5 toy water gun, such as that illustrated in FIGURES 23 through 26. This toy
water gun includes two housings [or chambers] 406, 408 that may be
constructed of injection-molded plastic or other suitable material. The two
housings 406, 408 are affixed, such as glued, heat sealed or by other such
means, along a median seam 462 to form the body of the water gun. See
10 especially FIGURES 25 and 26.

In operation, one housing 406 contains a mixture having less than all the
components necessary for generating bioluminescence and the other housing
408 contains a mixture having the remaining components or the remaining
components except for air. Depressing the trigger 410 pushes the pistons 428,
15 430 into their respective cylinders 450, 452 compressing the trigger springs
432, 434 and pushing the contents of the cylinder through the respective
conduit means 458, 460, past the second check-valves 442, 444, out the
outlet tubes 424, 426, into the mixing chamber 420 and out the nozzle orifice
422. As the trigger 410 is released, the trigger springs 434, 432 return to their
20 relaxed state pushing the pistons 430, 428 out of the cylinders 452, 450
creating a vacuum therein that pulls the contents of the housings 406, 408
through the pick-up tubes 412, 414, past the first check-valves 438, 440 and
into the cylinders 450, 452. Pumping the trigger, such as by repeatedly
depressing and releasing it, moves the mixtures contained in the housings
25 through the gun into the mixing chamber 420 and out the nozzle orifice 422.

As the mixtures leave the outlet tubes 424, 426, just prior to expulsion
from the toy gun via the nozzle orifice 422, they enter the mixing chamber 420.
Bioluminescence begins either upon mixing of the components or as the mixed
composition contacts the air as it exits the toy gun. The mixtures may be
30 powdered, such as those produced by lyophilization, or they may be condensed
into a paste, or they may be liquid. If powdered or condensed, water or a
suitable composition, such as a suitable buffer can be added prior to use.

-149-

The housings 406, 408 may be filled and refilled through the filling caps 464, 466 located at the top of each housing. The trigger 410 is attached to a trigger guide 416 which serves to guide the trigger 410 towards the two piston assemblies 472. Only one of the two piston assemblies 472 is completely illustrated, and it is visible in FIGURE 23. The other piston assembly is adjacent to and, in this embodiment, identical to the one illustrated. Depression of the trigger 410 activates the two piston assemblies, e.g., 472. This causes a portion of the composition located in each housing 406, 408 to move through the toy gun into a mixing chamber 420 and out a nozzle orifice 422, as detailed above.

The piston assemblies e.g., 472 each include a piston 430, 428 which passes through a sealing o-ring 436, 429 is connected to a trigger spring 434, 432 and moves within a cylinder 452, 450. The piston assemblies each also include a spring retainer 456, 454 that secures one end of the trigger spring 434, 432 to the end wall of the cylinder. Each cylinder 452, 450 is in communication with one end of a pick-up tube 414, 412 and is about perpendicular to the pick-up tubes 414, 412. Each cylinder 452, 450 also communicates with the conduit means 458, 460.

Because the pistons 428, 430 are sealed within their cylinders 450, 452 by a sealing o-ring 429, 436, repeated movement of the pistons within the cylinders causes the air within the cylinders to be displaced thereby creating a vacuum within the pick-up tubes 412, 414 of the toy gun. This initiates the operation of the toy gun as described in detail above.

The illustrated embodiment has a trigger guard 411 that acts to prevent accidental discharge of the gun and makes the gun appear more realistic. The sighting aids 468, 470 aid in aiming the toy gun and also serve to make the gun appear realistic.

As illustrated in FIGURE 25, the two pick-up tubes 412 and 414 originate in the housings 406 and 408, respectively. Each pick-up tube 412, 414 includes a check-valve 440, 438, respectively. The first check-valves 440, 438 serve to prevent fluid flow from the piston assembly cylinders 450, 452 back into the housings 406, 408. The second check-valves 442, 444, similarly

-150-

prevent the fluids from flowing out of the outlet tubes 424, 426 and back into the piston assembly cylinders 452, 450.

Thus, in operation, repeated depression of the trigger 410 increases the pressure within the gun, thereby filling the mixing chamber 420 with a
5 combination of the compositions located in the two housings 406, 408, then forcing the mixed compositions out of the toy gun through the nozzle orifice 422.

EXAMPLE 12

Compressible Dispensing Apparatus

10 Figure 27 illustrates an alternative exemplary embodiment of a compressible dispensing apparatus. This embodiment is particularly adapted for containing and dispensing bioluminescent slimy play material as described herein, but may be used to dispense other ingredients. The primary difference
15 between the embodiment illustrated in Figure 11 and that illustrated in Figure 27 is that the latter has one or more small compartments 942, 944 located within the apparatus. These compartments are located such that compression of the apparatus expels the contents of the compartments into the main body 940 of the apparatus where those contents and any contents contained within the main body 940 mix.

20 The embodiment illustrated in Figure 27 has a first compartment 942 and a second compartment 944 contained within the main body 940 of the compressible dispensing apparatus. The compartments 942, 944 are preferably formed, along at least one edge 950, 952, by rupturable membranes, such as plastic membranes, or other readily punctured dividing means. At least one
25 other edge of each compartment 946, 948 is permanently affixed to the interior of the main body 940 of the apparatus. Thus, upon compression of the apparatus, the contents of the two compartments 942, 944 press against and rupture the rupturable membranes 950, 952, resulting in expulsion of the contents of the two compartments 942, 944 into the main body 940 of the
30 apparatus. Because at least one edge of each compartment 946, 948 is permanently affixed to the interior of the apparatus, the compartments remain in position and readily rupture during compression.

-151-

Preferably the two compartments 942, 944 are large enough to contact one another along one contact edge 954 within the apparatus. As the sides of the apparatus are compressed, the contents of the two compartments are pressed against this contact edge 954 and against the rupturable membranes 950, 952, which membranes then rupture. Preferably, the cap 956 to the apparatus remains in place until the two compartments have been ruptured and the contents mixed within the apparatus.

The compressible dispensing apparatus is illustrated in Figure 27 with two compartments 942, 944; however, it will be appreciated that one, three or more compartments may be included as appropriate. Factors to be considered in determining the appropriate number of compartments are the bioluminescence generating system to be used, the ingredients, particularly slimy play material ingredients to be used, the desired timing and duration of illumination, and the ultimate use for resulting composition, such as the slimy play material.

By way of example only, where two compartments are included in the apparatus, as illustrated in Figure 27, one compartment may contain the charged luciferin/luciferase mixture, such as aequorin photoprotein with coelenterazine and oxygen and the second compartment may contain a polyvinyl alcohol mixture. The main body of the apparatus contains the remaining ingredients, such calcium ions, necessary to complete the bioluminescence generating reaction, and also contains the other ingredients of the slimy play material, such as sodium tetraborate.

Alternatively, where the apparatus is configured with three compartments within the main body, one or more of the ingredients contained within the main body of the two compartment embodiment may instead be contained within the third compartment. For example, the sodium tetraborate may be included in the third compartment and the calcium ions, in an aqueous medium, may be in the main body of the apparatus. It will further be appreciated that the contents of each compartment and/or the main body may be in powder, liquid or semi-solid form. The liquid or semi-solid form are preferred.

-152-

EXAMPLE 13

Recombinant production *Renilla reniformis* luciferase lysate

The phagemid pTZ18R (Pharmacia) is a multi-purpose DNA vector designed for in vitro transcriptions and useful for expression of recombinant proteins in bacterial hosts. The vector contains the β -lactamase gene, which allows for the selection of transformants by resistance to ampicillin, and a polylinker site adjacent to the lacZ' gene. The heterologous gene of interest is inserted in the polylinker and transcribed from the lac promoter by induction, for example, with isopropyl- β -D-thiogalactopyranoside (IPTG).

The DNA encoding the *Renilla reniformis* luciferase has been cloned (e.g., see U.S. Patent Nos. 5,292,658 and 5,418,155). The plasmid pTZRLuc-1 encodes the *Renilla* luciferase on a 2.2 Kbp EcoRI to SstI DNA fragment inserted in EcoRI and SstI sites of pTZ18R (plasmid construction is described U.S. Patent Nos. 5,292,658 and 5,418,155; see also Lorenz et al. (1991) Isolation and Expression of a cDNA encoding *Renilla reniformis* Luciferase, Proc. Natl. Acad. Sci. U.S.A. 88:4438-4442). The initiation of transcription of the *Renilla* luciferase cDNA is under the control of the lacZ' promoter. E. coli strains harboring plasmid pTZRLuc-1 express *Renilla* luciferase that is functional in bioluminescence assays and retains the most of the critical properties of the native enzyme (see, e.g., U.S. Patent Nos. 5,292,658 and 5,418,155).

A derivative of pTZRLuc-1, pTZRLuc-3.6, produces approximately 7-fold higher levels of recombinant *Renilla* luciferase than pTZRLuc-1 when transformed into the same E. coli host. Competent E. coli strain XL-1 was transformed using purified pTZRLuc-3.6 according to the instructions provided by the manufacturer (XL-1 Supercompetent cells™ and protocol; Stratagene, Inc., La Jolla, CA). Transfectants were selected by plating on Luria Broth (LB) plates supplemented with 100 μ g/ml ampicillin.

Single ampicillin resistant colonies were grown in LB medium supplemented with 100 μ g/ml ampicillin at ambient temperature using continuous shaking until cell growth reached mid-log phase (i.e., cell culture reaches an O.D._{600nm} = 0.6-0.8 units). Transcription from the lac promoter was

-153-

induced by addition of 1 mM IPTG and cell culture was shaken at ambient temperature for an additional 8 hours.

Cells were harvested by centrifugation at 10,000 x g and frozen at -20°C. The cell pellet was thawed and resuspended at a 1:5 ratio (w/w) in a composition containing 10 mM EDTA, pH 8.0, containing 4 mg/ml lysozyme (Sigma Chemical Corp.). The cells were placed in a 25°C water bath for 30 minutes and then transferred to ice for 1 hour. The cells were lysed by sonication at 0°C using a 1 minute pulse from an Ultrasonics, Inc. cell disruptor.

10 The lysed cellular debris was removed by centrifugation at 30,000 x g for 3 hours and the supernatant was decanted and retained. The pellet was resuspended at a 1:5 ratio in the above-described compositions, and the subsequent incubations, lysis and centrifugation steps were repeated. The two supernatants were combined and stored at -70°C.

15 The resulting "clarified lysate" was employed as a source of recombinant luciferase. Alternatively, the lysate may be subjected to additional purification steps (e.g., ion exchange chromatography or immunoaffinity chromatography) to further enrich the lysate or provide a homogeneous source of the purified enzyme (see e.g., U.S. Patent Nos. 5,292,658 and 5,418,155).

20 EXAMPLE 14

Cartridges for loading, charging, recharging and/or filling bioluminescent novelty items

25 An exemplary loading, recharging or charging cartridge is depicted in FIGURES 28-34. Referring first FIGURE 28, a charging cartridge is shown and generally designated 1000. This charging cartridge includes a block 1002 having two cylinders, a first cylinder 1010 and a second cylinder 1012, and a plunger 1004 having a first piston 1006 and a second piston 1008. Additional chambers may be included. Also, the device may be adapted for use with the single chamber apparatus provided herein.

30 As shown, the block is formed with two cylinders 1010 and 1012, and the plunger is formed with two cylindrical pistons 1006 and 1008. It is to be appreciated that a triangular, rectangular, or any other geometry vessel may be substituted for either cylinder, so long as the shape of the pistons

-154-

provides for insertion into the block. Additionally, for example, the plunger 1004 may be formed such that the two pistons 1006 and 1008 are separate from the other to permit the insertion of pistons 1006 and 1008 into the block 1002 at different times.

- 5 The block 1002 and plunger 1004 may be made of any material known to one of skill in the art that does not react with the components of a bioluminescence generating system. In a preferred embodiment, the block 1002 and plunger 1004 are made of a plastic material that can be readily injection molded into a selected particular shape. Suitable plastics include, but are not
- 10 limited to polyvinyl chloride (PVC), or any other plastic, TEFLON, polyethylene, or any other material that is inert to components stored and dispensed from the block 1002. Alternatively, the block 1002 and plunger 1004 can be made from a metal that is machined, cast, or otherwise formed into the particular shape.

- Referring now to FIGURE 29, the first cylinder 1010 has a plug 1016
- 15 which retains, for example, dry ingredients 1018 containing one or more components of a bioluminescence generating system, preferably including a luciferase and/or luciferin and any necessary buffers and activators, e.g., ATP or Ca^{2+} , and more preferably a luciferase, buffers and any necessary activators, in lyophilized or other suitable form, in the cylinder 1010 and against the seal
- 20 1022. Thus, the dry or condensed ingredients 1018 are trapped within the first cylinder 1010 between the plug 1016 and the seal 1022 until the plunger 1004 and piston 1006 are forced into the first cylinder 1010. At that time, these ingredients 1018 are forced through the funnel means 1020, thereby breaking the seal 1022, and forcing the ingredients 1018 out of the block 1002 through
- 25 nozzle 1024 and out aperture 1026. The seal 1022 is preferably made of a material which is capable of being broken with only minimal pressure asserted on the plunger 1004. Such a material includes, for example, a paper, wax-covered paper, plastic sheet, foil, cellophane or any other material exhibiting the requisite properties.

-155-

The second cylinder 1012 is formed within a fluid sleeve 1014 that is inserted into the block 1002. In this way, the sleeve 1014 may be a sealed tube made from, for example, plastic, glass, or any other material that is compressible and/or breakable, thereby allowing the fluid 1030 to be forced from the sleeve 1014. The sleeve 1014 may be prefabricated and loaded with the fluid 1030 prior to insertion into the block 1002, or the fluid 1030 may be added to the sleeve 1014 once it is positioned within the block 1002, and retained therein by plug 1028.

The piston 1008 slides into the second cylinder 1012 and strikes plug 1028, advancing it into the block 1002. The advancing plug 1028 creates a fluid pressure within the sleeve 1014 which eventually breaks seal 1032 and optionally bathes the matrix material 1034 in fluid 1030. Like the seal 1022 in the first cylinder 1010, the seal 1032 in the second cylinder 1014 can be made of any material that can be broken or torn or ruptured with only minimal pressure being asserted on the plunger 1008. Such a material may be a paper, wax-covered paper, plastic sheet, foil, cellophane or any other material which exhibits the necessary characteristics.

The matrix material 1034 may be any porous material to which the bioluminescence generating component can be adsorbed, absorbed or otherwise linked, as described herein, that is non-reactive with the components of the bioluminescence generating system. When necessary, the matrix material 1034 is included and bathed in the fluid 1030 such that the component(s) of the bioluminescence generating system affixed to the matrix material are released into the fluid 1030. As the piston is continually advanced, the fluid, containing bioluminescence generating components eluted from the matrix material, is forced through the filter 1036 and out the nozzle 1038 and aperture 1040. Filter 1036 is used to prevent the expulsion of matrix material 1034 from the second cylinder 1014. As a result, the filter 1036 may be made from a cloth or metallic weave, or any other material that will not react with the various components and compositions present within the second cylinder 1014.

It is to be appreciated, however, that the various components of the bioluminescent reaction may be distributed in different combinations between

-156-

the two cylinders 1010, 1012, and the matrix material 1034. One cylinder, such as the the first cylinder 1010, typically contains the dry or condensed ingredients 1018 and the second cylinder 1012 typically contains a fluid 1030 and the matrix material containing the remaining components necessary for the bioluminescent reaction. The dry or condensed ingredients may contain any combination of the components of the bioluminescence generating system, such as a luciferase and/or a luciferin, buffer salts, ATP, Ca^{2+} or any other necessary activator. The fluid 1030 may be water, a buffer, an organic solvent or any other aqueous medium suitable for solubilizing or suspending one or more components of a bioluminescence generating system to be dispensed into the bioluminescent novelty item.

In a preferred embodiment, the dry ingredients 1018 include lyophilized luciferase and buffer salts in powder form, and the fluid includes an alcohol that is used to dissolve or suspend a quantity of luciferin affixed to the matrix material. Alternatively, all of the components of a bioluminescence generating system, such as the *Vargula* system, may be added and packaged in the first and/or second cylinders in the absence of molecular oxygen such that components are activated when combined and exposed to air.

Referring now to FIGURE 30, the cartridge 1000 is shown as used in conjunction with a typical bioluminescent novelty item 1042. As shown, the plunger 1004 has been pressed completely against the block 1002 causing the first piston 1006 and the second piston 1008 to be inserted completely into the block 1002. As the piston 1006 is advanced into the block 1002, the dry or condensed ingredients 1018, for example, are forced out of the first cylinder 1010, through the funnel 1020 thereby breaking the seal 1022, and out the nozzle 1024 and aperture 1026 into the chamber 1044 in novelty item 1042. Likewise, as the piston 1008 is advanced into the block 1002, the seal 1032 on the sleeve 1014 is ruptured causing the fluid 1030 to be dispensed, optionally bathing matrix material 1034. As the piston 1008 is advanced further, the fluid 1030 is forced through filter 1036, out nozzle 1038 and aperture 1040, and into chamber 1046 of novelty item 1042. In this manner, the novelty item is fully recharged with the components of a bioluminescence generating system

-157-

necessary for a bioluminescent reaction, while maintaining the separation of the chemicals as required for some novelty items.

The cartridge 1000 is shown inserted into the filler holes of a typical novelty item 1042, such as those described elsewhere in this application. For
5 example, the cartridge could be adapted to fit the numerous of the novelty items, such as the following novelty items: the filler caps 17, 19 associated with chambers 10, 12 shown in FIGURES 1 and 3; the filler caps 82, 84 shown in FIGURES 4 and 5; the filler caps 104, 106 shown in FIGURES 6, 7, and 8; and the filler caps 406, 408 on housing 466 in FIGURES 23 through 26. It
10 should be appreciated that although several novelty items have been identified as being either chargeable or rechargeable using the cartridges disclosed herein, such identification is merely exemplary and is in no way to be intended as limiting the application of the cartridges to those particular novelty items. On the contrary, the cartridges described herein may be adaptable to charge, or
15 recharge, virtually any bioluminescent novelty item.

Referring now to FIGURE 31, a second embodiment of a charging cartridge is shown and generally designated 1100. The cartridge 1100 is shaped substantially like the cartridge 1000, with the addition of a safety feature that prevents the accidental or inadvertent discharge of the cartridge
20 when not inserted properly within a novelty item. While an accidental discharge would not be physically harmful to a human or non-human animal, such a discharge could prematurely release the bioluminescent materials. The likelihood of such an accidental discharge could, perhaps, be increased when considering the intended user of many of the novelty items, such as children.

25 In this exemplary embodiment, cartridge 1100 contains a block 1102 and a plunger 1104 which, like the cartridge 1000, has a first piston 1106 and a second piston 1108. Unlike the cartridge 1000, however, each of the pistons 1106 and 1108 is equipped with a piston head 1110 and 1112, respectively. These piston heads, in conjunction with cap 1118 prevent the removal of the
30 plunger 1104 from the block 1102. As a result, the cartridge 1100 cannot be disassembled to yield direct access to the contents of the cylinders 1114 and 1116. In addition to the piston heads 1110, 1112, the cartridge 1100 is also

-158-

equipped with a stop 1120 and a slide 1122 to prevent the accidental compression of the plunger 1104 into the block 1102 while the cartridge is not inserted into a novelty item. More specifically, the stop 1120 is normally positioned in the path of the first piston 1106 to prevent the advance of the

5 first piston 1106 into the block 1102. Once the cartridge 1100 is positioned on an appropriate novelty item, the slide 1122 is automatically pressed upwards thereby moving the stop 1120 out of the path of the dry piston 1106. Once the stop 1120 is out of the way, the two pistons 1106, and 1108, may be pressed into the block 1102, thereby releasing the contents of the first cylinder

10 1114 and the second cylinder 1116 in the same manner as discussed above in conjunction with FIGURES 28 through 30.

Referring now to FIGURE 32, the cartridge 1100 is shown as used in conjunction with a properly equipped novelty item 1152. As shown, the novelty item 1152 is equipped with a pin 1162 which extends upwards from

15 the novelty item 1152. As the cartridge 1100 is placed over the novelty item 1152, the pin 1162 forces the slide 1122 upwards thereby moving the stop 1120 from the path of piston 1106. Once piston 1106 is able to be pressed into the block, the piston 1106 and piston 1108 are forced into the block 1102. More specifically, as piston 1106 is forced into the block 1102, the piston

20 advances plug 1126 which in turn forces the dry or condensed ingredients 1128 to break seal 1130. Once the seal 1130 is broken, the dry or condensed ingredients 1128 are further forced through nozzle 1132 and out aperture 1134, and into the first chamber 1154 of the novelty item 1152. Similarly, as the plunger is depressed, the wet piston 1108 is forced into the fluid cylinder 1116

25 and strikes plug 1138. As the wet piston is advanced, the plug 1138 creates a fluid pressure within the sleeve 1136, thereby rupturing the seal 1142 causing the fluid 1140 to be forced through the matrix material 1144, through filter 1146, and through nozzle 1148 and out aperture 1150 and into the second chamber 1156 in novelty item 1152.

30 FIGURE 33 provides a cross-sectional view of the cartridge 1100, showing in detail the placement of the stop 1120 and slide 1122 in relation to the dry piston head 1110. As shown, the stop 1120 extends into cylinder

-159-

1114 sufficiently to prevent the advancement of piston 1126 in cylinder 1114. It should be appreciated that while the stop 1120 is blocking the advance of only the piston 1110, that piston 1112 could be held in place in addition to, or instead of, piston 1110. Moreover, the stop 1120 and slide 1122 could be
5 positioned anywhere in the block 1102 such that the pin 1162 could be positioned on the novelty device in an alternative location. It should also be appreciated that a spring (not shown) may be used to hold the stop 1120 in a resting position such that only with the movement of the slide 1122 can the dry piston 1106 be advanced into the block. Additionally, a spring (not shown)
10 may be positioned to naturally urge the slide towards hole 1124 in block 1102, thereby preventing the accidental movement of the slide without the aid of a pin 1162.

In addition to the cartridges as shown above, other means may be employed to minimize the leakage of the contents of the bioluminescence
15 generating systems in combination with the various novelty items described herein. More specifically, the novelty item 1152 may be equipped with a removable cap 1164 that is used to seal the chambers 1154 and 1156 of the novelty item 1152 to minimize the leakage of any components of the bioluminescence generating system. Further, a series of seals 1158 and 1160,
20 or one way seal valves, can be used to prevent the escape of the components once they have been placed in the chambers of the novelty item 1152. Seal 1160 is of a type which is normally biased to a closed position to prevent the passage of material in one direction. In this application, the seal 1160 is biased closed such that any material within the chambers 1154 and 1156 is retained
25 within the chamber. Only upon the insertion of nozzles 1132 and 1148 through the seals 1158 and 1160 is it possible for material to pass through the seal. Thus, once the nozzles 1132 and 1148 are inserted into the novelty item 1152 through the seals 1158 and 1160, the contents of the cylinders 1128 and 1140 are easily injected. Once the contents are injected, however, the nozzles are
30 removed, and the seals 1158, 1160 return to their normal biased closed position to prevent the escape of the chemicals from the chambers 1154, 1156.

-160-

In yet another alternative embodiment of a cartridge, a dispensing syringe is shown in FIGURE 34 and generally designated 1200. Syringe 1200 has a body 1202 which is equipped with a circumferential flange 1204 (or a pair of tabs extending from each side of the body), and a plunger 1206. This construction provides for a one-handed operation recharging a novelty item. More specifically, by holding the body adjacent to the circumferential flange between the index finger and middle finger of a user, and using the thumb to advance the plunger 1206 into the body 1202, the entire contents of the dispensing syringe 1200 can be injected into the novelty item.

10 The plunger 1206 has two pistons 1210 and 1208 which are formed with plugs 1212 and 1220 respectively. These plugs 1212 and 1220 are sized to be snugly received inside the cylinders, e.g., cylinders 1213 and 1221. One cylinder, e.g., cylinder 1213, is filled with dry ingredients 1214 and held in place against the seal 1216. Like the cartridges 1000 and 1100 discussed
15 above, as piston 1212 is advanced into cylinder 1213, the seal 1216 is ruptured allowing the expulsion of the dry ingredients 1214 out of nozzle 1218 and into chamber 1234 of novelty item 1232.

Plug 1220 is positioned in the cylinder 1221 to retain, for example, the fluid 1222 between seal 1224 and plug 1220. As with the cartridges discussed
20 above, as piston 1208 is advanced into the body 1202, fluid pressure is created within the cylinder 1221, thereby rupturing the seal 1224. Once the seal is ruptured, the fluid fluid is dispensed, and optionally bathes matrix material 1226 to dissolve the one or more component of the bioluminescence generating system into the fluid. As the piston 1212 is further advanced, the fluid 1222 is
25 forced through filter 1228 and out nozzle 1230 and into chamber 1236 of novelty item 1232.

As an alternative to the nozzles 1218 and 1230, a mixing chamber (not shown) can be formed in the body 1202 or attached thereto. Such a chamber would provide for the thorough mixing of the dry ingredients 1214 and the fluid
30 1222, prior to introduction of the chemicals into the novelty item. Such a mixing would be advantageous where it is not feasible to keep the components of the bioluminescence generating system separate until the instant the reaction

-161-

is desired, such as in a single-chambered novelty item having a single chemical input port. It is also to be appreciated that a mixing chamber can be easily formed within the cartridge 1000 and/or 1100 or attached thereto.

The charging cartridges 1000, 1100, and 1200 shown and described
5 herein have substantially cylindrical chambers within which to store the components of the bioluminescence generating system, separately or together, in liquid or solid form. It should be appreciated, however, that any shape chamber is contemplated herein. Specifically, in cartridge 1000 and 1100 may be formed with a pair of chambers having a rectangular cross-section, or may
10 be formed with each chamber having a semi-circular cross-section, representing one half of a cylindrical block. Virtually any shape for the block and chambers is contemplated herein, and the particular embodiments shown in FIGURES 28 through 34 are only exemplary.

In yet another alternative embodiment (not shown), the cylindrical
15 chambers of the cartridges 1000 and 1100 are replaced by compressible tubing which are positioned within the block and filled with the necessary chemicals, but are also easily compressed to expel the chemicals within them. The compressible tubing can be made from any other material which is sufficiently rigid to contain the chemicals, such plastic, rubber or other such material, but
20 pliable enough to allow the expulsion of the chemicals using a piston. The tubing can be formed in an accordion-shape which has pre-formed creases in the walls of the tubing, or may be formed in any manner which simplifies expulsion of the chemicals. Such a tubing construction would eliminate the need for plugs to retain the chemicals within the block, and will also simplify the
25 manufacturing of the cartridge by eliminating the direct handling of the bioluminescent components.

As an alternative to a cartridge having a block and plunger, a cartridge may be constructed having a block made from a pliable material that allows compression of the chemical tubing or other suitable material by squeezing the
30 sides of the block. In other words, instead of requiring a plunger having pistons which compress the chemical tubing, the block may be sealed with the chemical tubing contained inside the block, with the chemicals being expelled by

-162-

squeezing the sides of the block to create the pressure necessary to rupture the chemical tubing inside.

- In addition to a charging cartridge for charging and/or recharging bioluminescent novelty items, the cartridge incorporating compressible tubing
- 5 can be formed to allow replacement of the compressible tubing portions within the block. More specifically, once a cartridge has been used to charge or recharge a novelty item, the compressible tubing having a fluid and at least one component of the bioluminescent reaction, and the compressible tubing having the dry ingredients, may be removed from the block, and a new set of chemical
- 10 tubing may be positioned within the block. As a result, the cartridge may be repeatedly used, replacing only the chemical tubing portions. This would provide for the minimization of the costs associated with the use and repeated use of the novelty items because only the chemical tubing portions would have to be replaced, instead of discarding the entire cartridge following each use.
- 15 Since modifications will be apparent to those of skill in this art, it is intended that this invention be limited only by the scope of the appended claims.

-163-

Summary of Sequences of Representative luciferases and the reductase set forth in the Sequence Listing

1. SEQ ID NO. 1 *Renilla reiformis* Luciferase [U.S. Patent No. 5,418,155]
2. SEQ ID NO. 2 *Cypridina hilgendorffii* luciferase [EP 0 387 355]
- 5 3. SEQ ID NO. 3 Modified *Luciola cruciata* Luciferase [firefly; U.S. Patent No. 4,968,613]
4. SEQ ID NO. 4 *Vargula (Cypridina)* luciferase [Thompson et al. (1989) Proc. Natl. Acad. Sci. U.S.A. 86:6567-6571 and from JP 3-30678 Osaka]
- 10 5. SEQ ID NO. 5 Apoaequorin-encoding gene [U S. Patent No. 5,093,240, pAQ440]
6. SEQ ID NO. 6 Recombinant *Aequorin* AEQ1 [Prasher et al. (1987) "Sequence Comparisons of cDNAs Encoding for Aequorin Isotypes," Biochemistry 26:1326-1332]
- 15 7. SEQ ID NO. 7 Recombinant *Aequorin* AEQ2 [Prasher et al. (1987)]
8. SEQ ID NO. 8 Recombinant *Aequorin* AEQ3 [Prasher et al. (1987)]
9. SEQ ID NO. 9 *Aequorin* photoprotein [Charbonneau et al. (1985) "Amino Acid Sequence of the Calcium-Dependent Photoprotein Aequorin," Biochemistry 24:6762-6771]
- 20 10. SEQ ID NO. 10 *Aequorin* mutant with increased bioluminescence activity [U.S. Patent No. 5,360,728; Asp 124 changed to Ser]
11. SEQ ID NO. 11 *Aequorin* mutant with increased bioluminescence activity [U.S. Patent No. 5,360,728; Glu 135 changed to Ser]
12. SEQ ID NO. 12 *Aequorin* mutant with increased bioluminescence activity [U.S. Patent No. 5,360,728 Gly 129 changed to Ala]
- 25 13. SEQ ID NO. 13 Recombinant apoaequorin [sold by Sealite, Sciences, Bogart, GA as AQUALITE®, when reconstituted to form aequorin]
14. SEQ ID NO. 14 *Vibrio fischeri* Flavin reductase [U.S. Patent No. 5,484,723]

-164-

SEQUENCE LISTING

- (1) GENERAL INFORMATION
- (i) INVENTOR/APPLICANT:
- (A) NAME: Bryan, Bruce
 - (B) STREET: 716 Arden Drive
 - (C) CITY: Beverly Hills
 - (D) STATE: California
 - (E) COUNTRY: USA
 - (F) POSTAL CODE (ZIP): 90210
- (ii) TITLE OF THE INVENTION: BIOLUMINESCENT NOVELTY ITEMS
- (iii) NUMBER OF SEQUENCES: 14
- (iv) CORRESPONDENCE ADDRESS:
- (A) ADDRESSEE: Brown, Martin, Haller & McClain
 - (B) STREET: 1660 Union Street
 - (C) CITY: San Diego
 - (D) STATE: CA
 - (E) COUNTRY: USA
 - (F) ZIP: 92101-2926
- (v) COMPUTER READABLE FORM:
- (A) MEDIUM TYPE: Diskette
 - (B) COMPUTER: IBM Compatible
 - (C) OPERATING SYSTEM: DOS
 - (D) SOFTWARE: FastSEQ Version 1.5
- (vi) CURRENT APPLICATION DATA:
- (A) APPLICATION NUMBER:
 - (B) FILING DATE: 02-03-97
 - (C) CLASSIFICATION:
- (vii) PRIOR APPLICATION DATA:
- (A) APPLICATION NUMBER: 08/757,046
 - (B) FILING DATE: 11-25-96
- (viii) PRIOR APPLICATION DATA:
- (A) APPLICATION NUMBER: 08/597,274
 - (B) FILING DATE: 02-06-96
- (ix) ATTORNEY/AGENT INFORMATION:
- (A) NAME: Seidman, Stephanie L
 - (B) REGISTRATION NUMBER: 33,779
 - (C) REFERENCE/DOCKET NUMBER: 6680-105PC
- (x) TELECOMMUNICATION INFORMATION:
- (A) TELEPHONE: 619-238-0999
 - (B) TELEFAX: 619-238-0062
 - (C) TELEX:
- (2) INFORMATION FOR SEQ ID NO:1:
- (i) SEQUENCE CHARACTERISTICS:
- (A) LENGTH: 1196 base pairs
 - (B) TYPE: nucleic acid
 - (C) STRANDEDNESS: single
 - (D) TOPOLOGY: linear
- (ii) MOLECULE TYPE: cDNA
- (vi) ORIGINAL SOURCE:

-165-

(ix) FEATURE:

(A) NAME/KEY: Coding Sequence

(B) LOCATION: 1...942

(D) OTHER INFORMATION: Renilla Reinformis Luciferase

(x) PUBLICATION INFORMATION:

PATENT NO.: 5,418,155

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:1:

AGC TTA AAG ATG ACT TCG AAA GTT TAT GAT CCA GAA CAA AGG AAA CGG	48
Ser Leu Lys Met Thr Ser Lys Val Tyr Asp Pro Glu Gln Arg Lys Arg	
1 5 10 15	
ATG ATA ACT GGT CCG CAG TGG TGG GCC AGA TGT AAA CAA ATG AAT GTT	96
Met Ile Thr Gly Pro Gln Trp Trp Ala Arg Cys Lys Gln Met Asn Val	
20 25 30	
CTT GAT TCA TTT ATT AAT TAT TAT GAT TCA GAA AAA CAT GCA GAA AAT	144
Leu Asp Ser Phe Ile Asn Tyr Tyr Asp Ser Glu Lys His Ala Glu Asn	
35 40 45	
GCT GTT ATT TTT TTA CAT GGT AAC GCG GCC TCT TCT TAT TTA TGG CGA	192
Ala Val Ile Phe Leu His Gly Asn Ala Ala Ser Ser Tyr Leu Trp Arg	
50 55 60	
CAT GTT GTG CCA CAT ATT GAG CCA GTA GCG CGG TGT ATT ATA CCA GAT	240
His Val Val Pro His Ile Glu Pro Val Ala Arg Cys Ile Ile Pro Asp	
65 70 75 80	
CTT ATT GGT ATG GGC AAA TCA GGC AAA TCT GGT AAT GGT TCT TAT AGG	288
Leu Ile Gly Met Gly Lys Ser Gly Lys Ser Gly Asn Gly Ser Tyr Arg	
85 90 95	
TTA CTT GAT CAT TAC AAA TAT CTT ACT GCA TGG TTG AAC TTC TTA ATT	336
Leu Leu Asp His Tyr Lys Tyr Leu Thr Ala Trp Leu Asn Phe Leu Ile	
100 105 110	
TAC CAA AGA AGA TCA TTT TTT GTC GGC CAT GAT TGG GGT GCT TGT TTG	384
Tyr Gln Arg Arg Ser Phe Phe Val Gly His Asp Trp Gly Ala Cys Leu	
115 120 125	
GCA TTT CAT TAT AGC TAT GAG CAT CAA GAT AAG ATC AAA GCA ATA GTT	432
Ala Phe His Tyr Ser Tyr Glu His Gln Asp Lys Ile Lys Ala Ile Val	
130 135 140	
CAC GCT GAA AGT GTA GTA GAT GTG ATT GAA TCA TGG GAT GAA TGG CCT	480
His Ala Glu Ser Val Val Asp Val Ile Glu Ser Trp Asp Glu Trp Pro	
145 150 155 160	
GAT ATT GAA GAA GAT ATT GCG TTG ATC AAA TCT GAA GAA GGA GAA AAA	528
Asp Ile Glu Glu Asp Ile Ala Leu Ile Lys Ser Glu Glu Gly Glu Lys	
165 170 175	
ATG GTT TTG GAG AAT AAC TTC TTC GTG GAA ACC ATG TTG CCA TCA AAA	576
Met Val Leu Glu Asn Asn Phe Phe Val Glu Thr Met Leu Pro Ser Lys	
180 185 190	
ATC ATG AGA AAG TTA GAA CCA GAA GAA TTT GCA GCA TAT CTT GAA CCA	624
Ile Met Arg Lys Leu Glu Pro Glu Glu Phe Ala Ala Tyr Leu Glu Pro	
195 200 205	
TTC AAA GAG AAA GGT GAA GTT CGT CGT CCA ACA TTA TCA TGG CCT CGT	672

-166-

Phe	Lys	Glu	Lys	Gly	Glu	Val	Arg	Arg	Pro	Thr	Leu	Ser	Trp	Pro	Arg		
210						215					220						
GAA	ATC	CCG	TTA	GTA	AAA	GGT	GGT	AAA	CCT	GAC	GTT	GTA	CAA	ATT	GTT	720	
Glu	Ile	Pro	Leu	Val	Lys	Gly	Gly	Lys	Pro	Asp	Val	Val	Gln	Ile	Val		
225					230					235					240		
AGG	AAT	TAT	AAT	GCT	TAT	CTA	CGT	GCA	AGT	GAT	GAT	TTA	CCA	AAA	ATG	768	
Arg	Asn	Tyr	Asn	Ala	Tyr	Leu	Arg	Ala	Ser	Asp	Asp	Leu	Pro	Lys	Met		
				245					250						255		
TTT	ATT	GAA	TCG	GAT	CCA	GGA	TTC	TTT	TCC	AAT	GCT	ATT	GTT	GAA	GGC	816	
Phe	Ile	Glu	Ser	Asp	Pro	Gly	Phe	Phe	Ser	Asn	Ala	Ile	Val	Glu	Gly		
			260					265					270				
GCC	AAG	AAG	TTT	CCT	AAT	ACT	GAA	TTT	GTC	AAA	GTA	AAA	GGT	CTT	CAT	864	
Ala	Lys	Lys	Phe	Pro	Asn	Thr	Glu	Phe	Val	Lys	Val	Lys	Gly	Leu	His		
		275					280						285				
TTT	TCG	CAA	GAA	GAT	GCA	CCT	GAT	GAA	ATG	GGA	AAA	TAT	ATC	AAA	TCG	912	
Phe	Ser	Gln	Glu	Asp	Ala	Pro	Asp	Glu	Met	Gly	Lys	Tyr	Ile	Lys	Ser		
		290				295						300					
TTC	GTT	GAG	CGA	GTT	CTC	AAA	AAT	GAA	CAA	TAA	TTACTTTGGT	TTTTTATTTA				965	
Phe	Val	Glu	Arg	Val	Leu	Lys	Asn	Glu	Gln								
305					310												
CATTTTCCC	GGGTTTAATA	ATATAAATGT	CATTTTCAAC	AATTTTATT	TAAGTGAATA	1025											
TTTCACAGGG	AACATTCATA	TATGTTGATT	AATTTAGCTC	GAACTTTACT	CTGTCATATC	1085											
ATTTTGGAAAT	ATTACCTCTT	TCAATGAAAC	TTTATAAACA	GTGGTTCAAT	TAATTAATAT	1145											
ATATTATAAT	TACATTGTGT	ATGTAATAAA	CTCGGTTTTA	TTATAAAAAA	A	1196											

(2) INFORMATION FOR SEQ ID NO:2:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 1822 base pairs
 (B) TYPE: nucleic acid
 (C) STRANDEDNESS: single
 (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

- (A) NAME/KEY: Coding Sequence
 (B) LOCATION: 1...1665
 (D) OTHER INFORMATION: Cypridina hilgendorffii luciferase

(x) PUBLICATION INFORMATION:

PATENT NO.: EP 0 387 355 TORAY

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:2:

ATG	AAG	CTA	ATA	ATT	CTG	TCT	ATT	ATA	TTG	GCC	TAC	TGT	GTC	ACA	GTC	48	
Met	Lys	Leu	Ile	Ile	Leu	Ser	Ile	Ile	Leu	Ala	Tyr	Cys	Val	Thr	Val		
1				5					10					15			
AAC	TGC	CAG	GAT	GCA	TGT	CCT	GTA	GAA	GCT	GAA	GCA	CCG	TCA	AGT	ACA	96	
Asn	Cys	Gln	Asp	Ala	Cys	Pro	Val	Glu	Ala	Glu	Ala	Pro	Ser	Ser	Thr		
			20					25					30				
CCA	ACA	GTC	CCA	ACA	TCT	TGT	GAA	GCT	AAA	GAA	GGA	GAA	TGT	ATC	GAT	144	
Pro	Thr	Val	Pro	Thr	Ser	Cys	Glu	Ala	Lys	Glu	Gly	Glu	Cys	Ile	Asp		
		35				40						45					

-167-

ACC	AGA	TGC	GCA	ACA	TGT	AAA	CGA	GAC	ATA	CTA	TCA	GAC	GGA	CTG	TGT	192
Thr	Arg	Cys	Ala	Thr	Cys	Lys	Arg	Asp	Ile	Leu	Ser	Asp	Gly	Leu	Cys	
	50					55					60					
GAA	AAT	AAA	CCA	GGG	AAG	ACA	TGC	TGT	AGA	ATG	TGC	CAG	TAT	GTA	ATT	240
Glu	Asn	Lys	Pro	Gly	Lys	Thr	Cys	Cys	Arg	Met	Cys	Gln	Tyr	Val	Ile	
65					70				75					80		
GAA	TCC	AGA	GTA	GAA	GCT	GCT	GGA	TAT	TTT	AGA	ACG	TTT	TAC	GCC	AAA	288
Glu	Ser	Arg	Val		Ala	Ala	Gly	Tyr	Phe	Arg	Thr	Phe	Tyr	Ala	Lys	
			85						90					95		
AGA	TTT	AAT	TTT	CAG	GAA	CCT	GGT	AAA	TAT	GTG	CTG	GCT	CGA	GGA	ACC	336
Arg	Phe	Asn	Phe	Gln	Glu	Pro	Gly	Lys	Tyr	Val	Leu	Ala	Arg	Gly	Thr	
			100					105						110		
AAG	GGT	GGC	GAC	TGG	TCT	GTA	ACC	CTC	ACC	ATG	GAG	AAT	CTA	GAT	GGA	384
Lys	Gly	Gly	Asp	Trp	Ser	Val	Thr	Leu	Thr	Met	Glu	Asn	Leu	Asp	Gly	
		115					120					125				
CAG	AAG	GGA	GCT	GTA	CTG	ACT	AAG	ACA	ACA	CTG	GAG	GTA	GTA	GGA	GAC	432
Gln	Lys	Gly	Ala	Val	Leu	Thr	Lys	Thr	Thr	Leu	Glu	Val	Val	Gly	Asp	
	130					135					140					
GTA	ATA	GAC	ATT	ACT	CAA	GCT	ACT	GCA	GAT	CCT	ATC	ACA	GTT	AAC	GGA	480
Val	Ile	Asp	Ile	Thr	Gln	Ala	Thr	Ala	Asp	Pro	Ile	Thr	Val	Asn	Gly	
145					150					155					160	
GGA	GCT	GAC	CCA	GTT	ATC	GCT	AAC	CCG	TTC	ACA	ATT	GGT	GAG	GTG	ACC	528
Gly	Ala	Asp	Pro	Val	Ile	Ala	Asn	Pro	Phe	Thr	Ile	Gly	Glu	Val	Thr	
				165				170					175			
ATT	GCT	GTT	GTC	GAA	ATA	CCC	GGC	TTC	AAT	ATT	ACA	GTC	ATC	GAA	TTC	576
Ile	Ala	Val	Val	Glu	Ile	Pro	Gly	Phe	Asn	Ile	Thr	Val	Ile	Glu	Phe	
			180					185					190			
TTT	AAA	CTA	ATC	GTG	ATA	GAT	ATT	CTG	GGA	GGA	AGA	TCT	GTG	AGA	ATT	624
Phe	Lys	Leu	Ile	Val	Ile	Asp	Ile	Leu	Gly	Gly	Arg	Ser	Val	Arg	Ile	
		195					200					205				
GCT	CCA	GAC	ACA	GCA	AAC	AAA	GGA	CTG	ATA	TCT	GGT	ATC	TGT	GGT	AAT	672
Ala	Pro	Asp	Thr	Ala	Asn	Lys	Gly	Leu	Ile	Ser	Gly	Ile	Cys	Gly	Asn	
	210					215					220					
CTG	GAG	ATG	AAT	GAC	GCT	GAT	GAC	TTT	ACT	ACA	GAC	GCA	GAT	CAG	CTG	720
Leu	Glu	Met	Asn	Asp	Ala	Asp	Asp	Phe	Thr	Thr	Asp	Ala	Asp	Gln	Leu	
225					230					235				240		
GCG	ATC	CAA	CCC	AAC	ATA	AAC	AAA	GAG	TTC	GAC	GGC	TGC	CCA	TTC	TAC	768
Ala	Ile	Gln	Pro	Asn	Ile	Asn	Lys	Glu	Phe	Asp	Gly	Cys	Pro	Phe	Tyr	
				245				250						255		
GGG	AAT	CCT	TCT	GAT	ATC	GAA	TAC	TGC	AAA	GGT	CTC	ATG	GAG	CCA	TAC	816
Gly	Asn	Pro	Ser	Asp	Ile	Glu	Tyr	Cys	Lys	Gly	Leu	Met	Glu	Pro	Tyr	
			260					265					270			
AGA	GCT	GTA	TGT	CGT	AAC	AAT	ATC	AAC	TTC	TAC	TAT	TAC	ACT	CTG	TCC	864
Arg	Ala	Val	Cys	Arg	Asn	Asn	Ile	Asn	Phe	Tyr	Tyr	Tyr	Thr	Leu	Ser	
		275					280						285			
TGC	GCC	TTC	GCT	TAC	TGT	ATG	GGA	GGA	GAA	GAA	AGA	GCT	AAA	CAC	GTC	912
Cys	Ala	Phe	Ala	Tyr	Cys	Met	Gly	Gly	Glu	Glu	Arg	Ala	Lys	His	Val	
	290					295					300					

-168-

CTT	TTC	GAC	TAT	GTT	GAG	ACA	TGC	GCT	GCA	CCG	GAA	ACG	AGA	GGA	ACG	960
Leu	Phe	Asp	Tyr	Val	Glu	Thr	Cys	Ala	Ala	Pro	Glu	Thr	Arg	Gly	Thr	
305					310					315					320	
TGT	GTT	TTA	TCA	GGA	CAT	ACT	TTC	TAT	GAC	ACA	TTC	GAC	AAA	GCC	AGA	1008
Cys	Val	Leu	Ser	Gly	His	Thr	Phe	Tyr	Asp	Thr	Phe	Asp	Lys	Ala	Arg	
				325					330					335		
TAT	CAA	TTC	CAG	GGC	CCA	TGC	AAA	GAG	CTT	CTG	ATG	GCC	GCA	GAC	TGT	1056
Tyr	Gln	Phe	Gln	Gly	Pro	Cys	Lys	Glu	Leu	Leu	Met	Ala	Ala	Asp	Cys	
			340					345					350			
TAC	TGG	AAC	ACA	TGG	GAT	GTA	AAG	GTT	TCA	CAT	AGA	GAT	GTT	GAG	TCA	1104
Tyr	Trp	Asn	Thr	Trp	Asp	Val	Lys	Val	Ser	His	Arg	Asp	Val	Glu	Ser	
		355					360					365				
TAC	ACT	GAG	GTA	GAG	AAA	GTA	ACA	ATC	AGG	AAA	CAG	TCA	ACT	GTA	GTA	1152
Tyr	Thr	Glu	Val	Glu	Lys	Val	Thr	Ile	Arg	Lys	Gln	Ser	Thr	Val	Val	
	370					375					380					
GAT	TTG	ATT	GTG	GAT	GGC	AAG	CAG	GTC	AAG	GTT	GGA	GGA	GTG	GAT	GTA	1200
Asp	Leu	Ile	Val	Asp	Gly	Lys	Gln	Val	Lys	Val	Gly	Gly	Val	Asp	Val	
385					390					395					400	
TCT	ATC	CCG	TAC	AGT	TCT	GAG	AAC	ACA	TCC	ATA	TAC	TGG	CAG	GAT	GGA	1248
Ser	Ile	Pro	Tyr	Ser	Ser	Glu	Asn	Thr	Ser	Ile	Tyr	Trp	Gln	Asp	Gly	
				405					410					415		
GAC	ATC	CTG	ACG	ACG	GCC	ATC	CTA	CCT	GAA	GCT	CTT	GTC	GTT	AAG	TTC	1296
Asp	Ile	Leu	Thr	Thr	Ala	Ile	Leu	Pro	Glu	Ala	Leu	Val	Val	Lys	Phe	
			420					425					430			
AAC	TTT	AAG	CAG	CTC	CTT	GTA	GTT	CAT	ATC	AGA	GAT	CCA	TTC	GAT	GGA	1344
Asn	Phe	Lys	Gln	Leu	Leu	Val	Val	His	Ile	Arg	Asp	Pro	Phe	Asp	Gly	
		435				440						445				
AAG	ACA	TGC	GGC	ATA	TGT	GGT	AAC	TAT	AAT	CAA	GAT	TCA	ACT	GAT	GAT	1392
Lys	Thr	Cys	Gly	Ile	Cys		Asn	Tyr	Asn	Gln	Asp	Ser	Thr	Asp	Asp	
	450				455						460					
TTC	TTT	GAC	GCA	GAA	GGA	GCA	TGC	GCT	CTG	ACC	CCC	AAT	CCC	CCA	GGA	1440
Phe	Phe	Asp	Ala	Glu	Gly	Ala	Cys	Ala	Leu	Thr	Pro	Asn	Pro	Pro	Gly	
465				470						475					480	
TGT	ACA	GAG	GAG	CAG	AAA	CCA	GAA	GCT	GAG	CGA	CTC	TGC	AAT	AGT	CTA	1488
Cys	Thr	Glu	Glu	Gln	Lys	Pro	Glu	Ala	Glu	Arg	Leu	Cys	Asn	Ser	Leu	
				485					490					495		
TTT	GAT	AGT	TCT	ATC	GAC	GAG	AAA	TGT	AAT	GTC	TGC	TAC	AAG	CCT	GAC	1536
Phe	Asp	Ser	Ser	Ile	Asp	Glu	Lys	Cys	Asn	Val	Cys	Tyr	Lys	Pro	Asp	
			500					505					510			
CGT	ATT	GCA	CGA	TGT	ATG	TAC	GAG	TAT	TGC	CTG	AGG	GGA	CAG	CAA	GGA	1584
Arg	Ile	Ala	Arg	Cys	Met	Tyr	Glu	Tyr	Cys	Leu	Arg	Gly	Gln	Gln	Gly	
		515					520					525				
TTC	TGT	GAC	CAT	GCT	TGG	GAG	TTC	AAA	AAA	GAA	TGC	TAC	ATA	AAG	CAT	1632
Phe	Cys	Asp	His	Ala	Trp	Glu	Phe	Lys	Lys	Glu	Cys	Tyr	Ile	Lys	His	
	530					535					540					
GGA	GAC	ACT	CTA	GAA	GTA	CCA	CCT	GAA	TGC	CAA	TAA	ATGAACAAAG				1677
Gly	Asp	Thr	Leu	Glu	Val	Pro	Pro	Glu	Cys	Gln						
545					550					555						

-169-

ATACAGAAGC TARGACTACT ACAGCAGAAG ATAAAAGAGA AGCTGTAGTT CTTCAAAAAC 1738
 AGTATATTTT GATGTACTCA TTGTTTACTT ACATAAAAAT AAATTGTTAT TATCATAACG 1798
 TAAAGAAAAA AAAAAAAAAA AAAA 1822

(2) INFORMATION FOR SEQ ID NO:3:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 1644 base pairs
 (B) TYPE: nucleic acid
 (C) STRANDEDNESS: single
 (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(ix) FEATURE:

- (A) NAME/KEY: Coding Sequence
 (B) LOCATION: 1...1644
 (D) OTHER INFORMATION: *Luciola Cruciata* Luciferase (Firefly)

(x) PUBLICATION INFORMATION:

PATENT NO.: 4,968,613

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:3:

ATG GAA AAC ATG GAA AAC GAT GAA AAT ATT GTA GTT GGA CCT AAA CCG	48
Met Glu Asn Met Glu Asn Asp Glu Asn Ile Val Val Gly Pro Lys Pro	
1 5 10 15	
TTT TAC CCT ATC GAA GAG GGA TCT GCT GGA ACA CAA TTA CGC AAA TAC	96
Phe Tyr Pro Ile Glu Glu Gly Ser Ala Gly Thr Gln Leu Arg Lys Tyr	
20 25 30	
ATG GAG CGA TAT GCA AAA CTT GGC GCA ATT GCT TTT ACA AAT GCA GTT	144
Met Glu Arg Tyr Ala Lys Leu Gly Ala Ile Ala Phe Thr Asn Ala Val	
35 40 45	
ACT GGT GTT GAT TAT TCT TAC GCC GAA TAC TTG GAG AAA TCA TGT TGT	192
Thr Gly Val Asp Tyr Ser Tyr Ala Glu Tyr Leu Glu Lys Ser Cys Cys	
50 55 60	
GTA GGA AAA GCT TTG CAA AAT TAT GGT TTG GTT GTT GAT GGC AGA ATT	240
Leu Gly Lys Ala Leu Gln Asn Tyr Gly Leu Val Val Asp Gly Arg Ile	
65 70 75 80	
GCG TTA TGC AGT GAA AAC TGT GAA GAA TTT TTT ATT CCT GTA ATA GCC	288
Ala Leu Cys Ser Glu Asn Cys Glu Glu Phe Phe Ile Pro Val Ile Ala	
85 90 95	
GGA CTG TTT ATA GGT GTA GGT GTT GCA CCC ACT AAT GAG ATT TAC ACT	336
Gly Leu Phe Ile Gly Val Gly Val Ala Pro Thr Asn Glu Ile Tyr Thr	
100 105 110	
TTA CGT GAA CTG GTT CAC AGT TTA GGT ATC TCT AAA CCA ACA ATT GTA	384
Leu Arg Glu Leu Val His Ser Leu Gly Ile Ser Lys Pro Thr Ile Val	
115 120 125	
TTE AGT TCT AAA AAA GGC TTA GAT AAA GTT ATA ACA GTA CAG AAA ACA	432
Phe Ser Ser Lys Lys Gly Leu Asp Lys Val Ile Thr Val Gln Lys Thr	
130 135 140	
GTA ACT ACT ATT AAA ACC ATT GTT ATA CTA GAT AGC AAA GTT GAT TAT	480
Val Thr Thr Ile Lys Thr Ile Val Ile Leu Asp Ser Lys Val Asp Tyr	

-170-

145	150	155	160	
CGA GGA TAT CAA TGT CTG GAC ACC TTT ATA AAA AGA AAC ACT CCA CCA Arg Gly Tyr Gln Cys Leu Asp Thr Phe Ile Lys Arg Asn Thr Pro Pro 165 170 175				528
GGT TTT CAA GCA TCC AGT TTC AAA ACT GTG GAA GTT GAC CGT AAA GAA Gly Phe Gln Ala Ser Ser Phe Lys Thr Val Glu Val Asp Arg Lys Glu 180 185 190				576
CAA GTT GCT CTT ATA ATG AAC TCT TCG GGT TCT ACC GGT TTG CCA AAA Gln Val Ala Leu Ile Met Asn Ser Ser Gly Ser Thr Gly Leu Pro Lys 195 200 205				624
GGC GTA CAA CTT ACT CAC GAA AAT ACA GTC ACT AGA TTT TCT CAT GCT Gly Val Gln Leu Thr His Glu Asn Thr Val Thr Phe Ser His Ala 210 215 220				672
AGA GAT CCG ATT TAT GGT AAC CAA GTT TCA CCA GGC ACC GCT GTT TTA Arg Asp Pro Ile Tyr Gly Asn Gln Val Ser Pro Gly Thr Ala Val Leu 225 230 235 240				720
ACT GTC GTT CCA TTC CAT CAT GGT TTT GGT ATG TTC ACT ACT CTA GGG Thr Val Val Pro Phe His His Gly Phe Gly Met Phe Thr Thr Leu Gly 245 250 255				768
TAT TTA ATT TGT GGT TTT CGT GTT GTA ATG TTA ACA AAA TTC GAT GAA Tyr Leu Ile Cys Gly Phe Arg Val Val Met Leu Thr Lys Phe Asp Glu 260 265 270				816
GAA ACA TTT TTA AAA ACT CTA CAA GAT TAT AAA TGT ACA AGT GTT ATT Glu Thr Phe Leu Lys Thr Leu Gln Asp Tyr Lys Cys Thr Ser Val Ile 275 280 285				864
CTT GTA CCG ACC TTG TTT GCA ATT CTC AAC AAA AGT GAA TTA CTC AAT Leu Val Pro Thr Leu Phe Ala Ile Leu Asn Lys Ser Glu Leu Leu Asn 290 295 300				912
AAA TAC GAT TTG TCA AAT TTA GTT GAG ATT GCA TCT GGC GGA GCA CCT Lys Tyr Asp Leu Ser Asn Leu Val Glu Ile Ala Ser Gly Gly Ala Pro 305 310 315 320				960
TTA TCA AAA GAA GTT GGT GAA GCT GTT GCT AGA CGC TTT AAT CTT CCC Leu Ser Lys Glu Val Gly Glu Ala Val Ala Arg Arg Phe Asn Leu Pro 325 330 335				1008
GGT GTT CGT CAA GGT TAT GGT TTA ACA GAA ACA ACA TCT GCC ATT ATT Gly Val Arg Gln Gly Tyr Gly Leu Thr Glu Thr Thr Ser Ala Ile Ile 340 345 350				1056
ATT ACA CCA GAA GGA GAC GAT AAA CCA GGA GCT TCT GGA AAA GTC GTG Ile Thr Pro Glu Gly Asp Asp Lys Pro Gly Ala Ser Gly Lys Val Val 355 360 365				1104
CCG TTG TTT AAA GCA AAA GTT ATT GAT CTT GAT ACC AAA AAA TCT TTA Pro Leu Phe Lys Ala Lys Val Ile Asp Leu Asp Thr Lys Lys Ser Leu 370 375 380				1152
GGT CCT AAC AGA CGT GGA GAA GTT TGT GTT AAA GGA CCT ATG CTT ATG Gly Pro Asn Arg Arg Gly Glu Val Cys Val Lys Gly Pro Met Leu Met 385 390 395 400				1200
AAA GGT TAT GTA AAT AAT CCA GAA GCA ACA AAA GAA CTT ATT GAC GAA				1248

-171-

Lys	Gly	Tyr	Val	Asn	Asn	Pro	Glu	Ala	Thr	Lys	Glu	Leu	Ile	Asp	Glu		
				405					410					415			
GAA	GGT	TGG	CTG	CAC	ACC	GGA	GAT	ATT	GGA	TAT	TAT	GAT	GAA	GAA	AAA	1296	
Glu	Gly	Trp	Leu	His	Thr	Gly	Asp	Ile	Gly	Tyr	Tyr	Asp	Glu	Glu	Lys		
			420				425						430				
CAT	TTC	TTT	ATT	GTC	GAT	CGT	TTG	AAG	TCT	TTA	ATC	AAA	TAC	AAA	GGA	1344	
His	Phe	Phe	Ile	Val	Asp	Arg	Leu	Lys	Ser	Leu	Ile	Lys	Tyr	Lys	Gly		
			435				440					445					
TAC	CAA	GTA	CCA	CCT	GCC	GAA	TTA	GAA	TCC	GTT	CTT	TTG	CAA	CAT	CCA	1392	
Tyr	Gln	Val	Pro	Pro	Ala	Glu	Leu	Glu	Ser	Val	Leu	Leu	Gln	His	Pro		
			450			455					460						
TCT	ATC	TTT	GAT	GCT	GGT	GTT	GCC	GGC	GTT	CCT	GAT	CCT	GTA	GCT	GGC	1440	
Ser	Ile	Phe	Asp	Ala	Gly	Val	Ala	Gly	Val	Pro	Asp	Pro	Val	Ala	Gly		
			465		470				475						480		
GAG	CTT	CCA	GGA	GCC	GTT	GTT	GTA	CTG	GAA	AGC	GGA	AAA	AAT	ATG	ACC	1488	
Glu	Leu	Pro	Gly	Ala	Val	Val	Val	Leu	Glu	Ser	Gly	Lys	Asn	Met	Thr		
				485					490					495			
GAA	AAA	GAA	GTA	ATG	GAT	TAT	GTT	GCA	AGT	CAA	GTT	TCA	AAT	GCA	AAA	1536	
Glu	Lys	Glu	Val	Met	Asp	Tyr	Val	Ala	Ser	Gln	Val	Ser	Asn	Ala	Lys		
			500					505					510				
CGT	TTA	CGT	GGT	GGT	GTT	CGT	TTT	GTG	GAT	GAA	GTA	CCT	AAA	GGT	CTT	1584	
Arg	Leu	Arg	Gly	Gly	Val	Arg	Phe	Val	Asp	Glu	Val	Pro	Lys	Gly	Leu		
			515				520					525					
ACT	GGA	AAA	ATT	GAC	GGC	AGA	GCA	ATT	AGA	GAA	ATC	CTT	AAG	AAA	CCA	1632	
Thr	Gly	Lys	Ile	Asp	Gly	Arg	Ala	Ile	Arg	Glu	Ile	Leu	Lys	Lys	Pro		
			530			535					540						
GTT	GCT	AAG	ATG													1644	
Val	Ala	Lys	Met														
			545														

(2) INFORMATION FOR SEQ ID NO:4:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 1820 base pairs
- (B) TYPE: nucleic acid
- (C) STRANDEDNESS: single
- (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(ix) FEATURE:

- (A) NAME/KEY: Coding Sequence
- (B) LOCATION: 1...1664
- (D) OTHER INFORMATION: Vargula (cypridina) luciferase

(x) PUBLICATION INFORMATION:

- (A) AUTHORS Thompson et al.
- (C) JOURNAL: Proc. Natl. Acad. Sci. U.S.A.
- (D) VOLUME: 86
- (F) PAGES: 6567-6571
- (G) DATE: (1989)

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:4:

-172-

ATG	AAG	ATA	ATA	ATT	CTG	TCT	GTT	ATA	TTG	GCC	TAC	TGT	GTC	ACC	GAC	48
Met	Lys	Ile	Ile	Ile	Leu	Ser	Val	Ile	Leu	Ala	Tyr	Cys	Val	Thr	Asp	
1				5					10					15		
AAC	TGT	CAA	GAT	GCA	TGT	CCT	GTA	GAA	GCG	GAA	CCG	CCA	TCA	AGT	ACA	96
Asn	Cys	Gln	Asp	Ala	Cys	Pro	Val	Glu	Ala	Glu	Pro	Pro	Ser	Ser	Thr	
			20					25					30			
CCA	ACA	GTT	CCA	ACT	TCT	TGT	GAA	GCT	AAA	GAA	GGA	GAA	TGT	ATA	GAT	144
Pro	Thr	Val	Pro	Thr	Ser	Cys	Ala	Ala	Lys	Glu	Gly	Glu	Cys	Ile	Asp	
		35					40					45				
ACC	AGA	TGC	GCA	ACA	TGT	AAA	CGA	GAT	ATA	CTA	TCA	GAT	GGA	CTG	TGT	192
Thr	Arg	Cys	Ala	Thr	Cys	Lys	Arg	Asp	Ile	Leu	Ser	Asp	Gly	Leu	Cys	
	50					55					60					
GAA	AAT	AAA	CCA	GGG	AAG	ACA	TGC	TGT	AGA	ATG	TGC	CAG	TAT	GTG	ATT	240
Glu	Asn	Lys	Pro	Gly	Lys	Thr	Cys	Cys	Arg	Met	Cys	Gln	Tyr	Val	Ile	
65				70					75					80		
GAA	TGC	AGA	GTA	GAA	GCA	GCT	GGT	TAT	TTT	AGA	ACG	TTT	TAC	GGC	AAA	288
Glu	Cys	Arg	Val	Glu	Ala	Ala	Gly	Tyr	Phe	Arg	Thr	Phe	Tyr	Gly	Lys	
				85					90					95		
AGA	TTT	AAT	TTT	CAG	GAA	CCT	GGT	AAA	TAT	GTG	CTG	GCT	AGG	GGA	ACC	336
Arg	Phe	Asn	Phe	Gln	Glu	Pro	Gly	Lys	Tyr	Val	Leu	Ala	Arg	Gly	Thr	
			100					105					110			
AAG	GGT	GGC	GAT	TGG	TCT	GTA	ACC	CTC	ACC	ATG	GAG	AAT	CTA	GAT	GGA	384
Lys	Gly	Gly	Asp	Trp	Ser	Val	Thr	Leu	Thr	Met	Glu	Asn	Leu	Asp	Gly	
		115					120					125				
CAG	AAG	GGA	GCT	GTG	CTG	ACT	AAG	ACA	ACA	CTG	GAG	GTT	GCA	GGA	GAC	432
Gln	Lys	Gly	Ala	Val	Leu	Thr	Lys	Thr	Thr	Leu	Glu	Val	Ala	Gly	Asp	
	130					135					140					
GTA	ATA	GAC	ATT	ACT	CAA	GCT	ACT	GCA	GAT	CCT	ATC	ACA	GTT	AAC	GGA	480
Val	Ile	Asp	Ile	Thr	Gln	Ala	Thr	Ala	Asp	Pro	Ile	Thr	Val	Asn	Gly	
145					150					155					160	
GGA	GCT	GAC	CCA	GTT	ATC	GCT	AAC	CCG	TTC	ACA	ATT	GGT	GAG	GTG	ACC	528
Gly	Ala	Asp	Pro	Val	Ile	Ala	Asn	Pro	Phe	Thr	Ile	Gly	Glu	Val	Thr	
				165				170					175			
ATT	GCT	GTT	GTT	GAA	ATA	CCG	GGC	TTC	AAT	ATC	ACA	GTC	ATC	GAA	TTC	576
Ile	Ala	Val	Val	Glu	Ile	Pro	Gly	Phe	Asn	Ile	Thr	Val	Ile	Glu	Phe	
			180				185						190			
TTT	AAA	CTA	ATC	GTG	ATT	GAT	ATT	CTG	GGA	GGA	AGA	TCT	GTC	AGA	ATT	624
Phe	Lys	Leu	Ile	Val	Ile	Asp	Ile	Leu	Gly	Gly	Arg	Ser	Val	Arg	Ile	
		195					200					205				
GCT	CCA	GAC	ACA	GCA	AAC	AAA	GGA	CTG	ATA	TCT	GGT	ATC	TGT	GGT	AAT	672
Ala	Pro	Asp	Thr	Ala	Asn	Lys	Gly	Leu	Ile	Ser	Gly	Ile	Cys	Gly	Asn	
	210					215					220					
CTG	GAG	ATG	AAT	GAC	GCT	GAT	GAC	TTT	ACT	ACA	GAT	GCA	GAT	CAG	CTG	720
Leu	Glu	Met	Asn	Asp	Ala	Asp	Asp	Phe	Thr	Thr	Asp	Ala	Asp	Gln	Leu	
225					230					235				240		
GCG	ATC	CAA	CCC	AAC	ATA	AAC	AAA	GAG	TTC	GAC	GGC	TGC	CCA	TTC	TAT	768
Ala	Ile	Gln	Pro	Asn	Ile	Asn	Lys	Glu	Phe	Asp	Gly	Cys	Pro	Phe	Tyr	
				245				250						255		

-173-

GGC AAT CCT TCT GAT ATC GAA TAC TGC AAA GGT CTG ATG GAG CCA TAC	816
Gly Asn Pro Ser Asp Ile Glu Tyr Cys Lys Gly Leu Met Glu Pro Tyr	
260 265 270	
AGA GCT GTA TGT CGT AAC AAT ATC AAC TTC TAC TAT TAC ACT CTA TCC	864
Arg Ala Val Cys Arg Asn Asn Ile Asn Phe Tyr Tyr Tyr Thr Leu Ser	
275 280 285	
TGT GCC TTC GCT TAC TGT ATG GGA GGA GAA GAA AGA GCT AAA CAC GTC	912
Cys Ala Phe Ala Tyr Cys Met Gly Gly Glu Glu Arg Ala Lys His Val	
290 295 300	
CTT TTC GAC TAT GTT GAG ACA TGC GCT GCG CCG GAA ACG AGA GGA ACG	960
Leu Phe Asp Tyr Val Glu Thr Cys Ala Ala Pro Glu Thr Arg Gly Thr	
305 310 315 320	
TGT GTT TTA TCA GGA CAT ACT TTC TAT GAC ACA TTC GAC AAA GCA AGA	1008
Cys Val Leu Ser Gly His Thr Phe Tyr Asp Thr Phe Asp Lys Ala Arg	
325 330 335	
TAT CAA TTC CAG GGC CCA TGC AAG GAG ATT CTG ATG GCC GCA GAC TGT	1056
Tyr Gln Phe Gln Gly Pro Cys Lys Glu Ile Leu Met Ala Ala Asp Cys	
340 345 350	
TAC TGG AAC ACA TGG GAT GTA AAG GTT TCA CAT AGA GAC GTC GAA TCA	1104
Tyr Trp Asn Thr Trp Asp Val Lys Val Ser His Arg Asp Val Glu Ser	
355 360 365	
TAC ACT GAG GTA GAG AAA GTA ACA ATC AGG AAA CAG TCA ACT GTA GTA	1152
Tyr Thr Glu Val Glu Lys Val Thr Ile Arg Lys Lys Gln Ser Thr Val Val	
370 375 380	
GAT CTC ATT GTG GAT GGC AAG CAG GTC AAG GTT GGA GGA GTG GAT GTA	1200
Asp Leu Ile Val Asp Gly Lys Gln Val Lys Val Gly Gly Val Asp Val	
385 390 395 400	
TCT ATC CCG TAC AGC TCT GAG AAC ACT TCC ATA TAC TGG CAG GAT GGA	1248
Ser Ile Pro Tyr Ser Ser Glu Asn Thr Ser Ile Tyr Trp Gln Asp Gly	
405 410 415	
GAC ATC CTG ACG ACG GCC ATC CTA CCT GAA GCT CTT GTC GTT AAG TTC	1296
Asp Ile Leu Thr Thr Ala Ile Leu Pro Glu Ala Leu Val Val Lys Phe	
420 425 430	
AAG TTT AAG CAG CTC CTT GTA GTT CAT ATC AGA GAT CCA TTC GAT GCA	1344
Asn Phe Lys Gln Leu Leu Val Val His Ile Arg Asp Pro Phe Asp Ala	
435 440 445	
AAG ACA TGC GGC ATA TGT GGT AAC TAT AAT CAA GAT TCA ACT GAT GAT	1392
Lys Thr Cys Gly Ile Cys Gly Asn Tyr Asn Gln Asp Ser Thr Asp Asp	
450 455 460	
TTC TTT GAC GCA GAA GGA GCA TGC GCT CTA ACC CCC AAC CCC CCA GGA	1440
Phe Phe Asp Ala Glu Gly Ala Cys Ala Leu Thr Pro Asn Pro Pro Gly	
465 470 475 480	
TGT ACA GAG GAA CAG AAA CCA GAA GCT GAG CGA CTT TGC AAT AAT CTC	1488
Cys Thr Glu Glu Gln Lys Pro Glu Ala Glu Arg Leu Cys Asn Asn Leu	
485 490 495	
TTT GAT TCT TCT ATC GAC GAG AAA TGT AAT GTC TGC TAC AAG CCT GAC	1536
Phe Asp Ser Ser Ile Asp Glu Lys Cys Asn Val Cys Tyr Lys Pro Asp	
500 505 510	

-174-

(2) INFORMATION FOR SEO ID NO:5:

(A) LENGTH: 958 base pairs
(B) TYPE: nucleic acid
(C) STRANDEDNESS: single
(D) TOPOLOGY: linear

(ix) **FEATURE:**

(D) OTHER INFORMATION: apoaeguorin-encoding gene

(G) DATE: (1985)

GGGGGGGGGG	GGGGGGGGGG	GGGGGGGGGG	GGGAATGCAA	TTCATCTTTG	CATCAAAGAA	60
TTACATCAAA	TCTCTAGTTG	ATCAACTAAA	TTGTCTCGAC	AACAACAAGC	AAAC ATG Met 1	117
ACA AGC AAA CAA TAC TCA GTC AAG CTT ACA TCA GAC TTC GAC AAC CCA	Thr Ser Lys Gln Tyr Ser Val Lys Leu Thr Ser Asp Phe Asn Pro	5 10 15	165			
AGA TGG ATT GGA CGA CAC AAG CAT ATG TTC AAT TTC CTT GAT GTC AAC	Arg Trp Ile Gly Arg His Lys His Met Phe Asn Phe Leu Asp Val Asn	20 25 30	213			
CAG AAT GGA AAA ATC TCT CTT GAC GAG ATG GTC TAC AAG GCA TCT GAT	His Asn Gly Lys Ile Ser Leu Asp Glu Met Val Tyr Lys Ala Ser Asp	35 40 45	261			

-175-

ATT GTC ATC AAT AAC CTT GGA GCA ACA CCT GAG CAA GCC AAA CGA CAC Ile Val Ile Asn Asn Leu Gly Ala Thr Pro Glu Gln Ala Lys Arg His 50 55 60 65	309
AAA GAT GCT GTA GAA GCC TTC TTC GGA GGA GCT GGA ATG AAA TAT GGT Lys Asp Ala Val Glu Ala Phe Phe Gly Gly Ala Gly Met Lys Tyr Gly 70 75 80	357
GTG GAA ACT GAT TGG CCT GCA TAT ATT GAA GGA TGG AAA AAA TTG GCT Val Glu Thr Asp Trp Pro Ala Tyr Ile Glu Gly Trp Lys Lys Leu Ala 85 90 95	405
ACT GAT GAA TTG GAG AAA TAC GCC AAA AAC GAA CCA ACG CTC ATC CGT Thr Asp Glu Leu Glu Lys Tyr Ala Lys Asn Glu Pro Thr Leu Ile Arg 100 105 110	453
ATA TGG GGT GAT GCT TTG TTT GAT ATC GTT GAC AAA GAT CAA AAT GGA Ile Trp Gly Asp Ala Leu Phe Asp Ile Val Asp Lys Asp Gln Asn Gly 115 120 125	501
GCC ATT ACA CTG GAT GAA TGG AAA GCA TAC ACC AAA GCT GCT GGT ATC Ala Ile Thr Leu Asp Glu Trp Lys Ala Tyr Thr Lys Ala Ala Gly Ile 130 135 140 145	549
ATC CAA TCA TCA GAA GAT TGC GAG GAA ACA TTC AGA GTG TGC GAT ATT Ile Gln Ser Ser Glu Asp Cys Glu Glu Thr Phe Arg Val Cys Asp Ile 150 155 160	597
GAT GAA AGT GGA CAA CTC GAT GTT GAT GAG ATG ACA AGA CAA CAT TTA Asp Glu Ser Gly Gln Leu Asp Val Asp Glu Met Thr Arg Gln His Leu 165 170 175	645
GGA TTT TGG TAC ACC ATG GAT CCT GCT TGC GAA AAG CTC TAC GGT GGA Gly Phe Trp Tyr Thr Met Asp Pro Ala Cys Glu Lys Leu Tyr Gly Gly 180 185 190	693
GCT GTC CCC TAAGAAGCTC TACGGTGGTG ATGCACCCTA GGAAGATGAT GTGATTTTGA Ala Val Pro 195	752
ATAAAACACT GATGAATTCA ATCAAAATTT TCCAAATTTT TGAACGATTT CAATCGTTTG TGTTGATTTT TGTAATTAGG AACAGATTAA ATCGAATGAT TAGTTGTTTT TTTAATCAAC AGAACTTACA AATCGAAAAA GTAAAAA AAAA AAAA AAAA AAAA AAAA AAAAA AAAA AAAA	812 872 932 958

(2) INFORMATION FOR SEQ ID NO:6:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 591 base pairs
- (B) TYPE: nucleic acid
- (C) STRANDEDNESS: single
- (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(iii) HYPOTHETICAL: NO

(iv) ANTISENSE: NO

(v) FRAGMENT TYPE:

(vi) ORIGINAL SOURCE:

(ix) FEATURE:

(A) NAME/KEY: Coding Sequence

(B) LOCATION: 1...588

(D) OTHER INFORMATION: Recombinant Aequorin AEQ1

-176-

(x) PUBLICATION INFORMATION:

- (A) AUTHORS: Prasher et al.
 (B) TITLE: Sequence Comparisons of Complementary
 DNAs Encoding Aequorin Isotypes
 (C) JOURNAL: Biochemistry
 (D) VOLUME: 26
 (F) PAGES: 1326-1332
 (G) DATE: 1987

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:6:

ATG ACC AGC GAA CAA TAC TCA GTC AAG CTT ACA CCA GAC TTC GAC AAC	48
Met Thr Ser Glu Gln Tyr Ser Val Lys Leu Thr Pro Asp Phe Asp Asn	
1 5 10 15	
CCA AAA TGG ATT GGA CGA CAC AAG CAC ATG TTT AAT TTT CTT GAT GTC	96
Pro Lys Trp Ile Gly Arg His Lys His Met Phe Asn Phe Leu Asp Val	
20 25 30	
AAC CAC AAT GGA AGG ATC TCT CTT GAC GAG ATG GTC TAC AAG GCG TCC	144
Asn His Asn Gly Arg Ile Ser Leu Asp Glu Met Val Tyr Lys Ala Ser	
35 40 45	
GAT ATT GTT ATA AAC AAT CTT GGA GCA ACA CCT GAA CAA GCC AAA CGT	192
Asp Ile Val Ile Asn Asn Leu Gly Ala Thr Pro Glu Gln Ala Lys Arg	
50 55 60	
CAC AAA GAT GCT GTA GAA GCC TTC TTC GGA GGA GCT GGA ATG AAA TAT	240
His Lys Asp Ala Val Glu Ala Phe Phe Gly Gly Ala Gly Met Lys Tyr	
65 70 75 80	
GGT GTA GAA ACT GAA TGG CCT GAA TAC ATC GAA GGA TGG AAA AGA CTG	288
Gly Val Glu Thr Glu Trp Pro Glu Tyr Ile Glu Gly Trp Lys Arg Leu	
85 90 95	
GCT TCC GAG GAA TTG AAA AGG TAT TCA AAA AAC CAA ATC ACA CTT ATT	336
Ala Ser Glu Glu Leu Lys Arg Tyr Ser Lys Asn Gln Ile Thr Leu Ile	
100 105 110	
CGT TTA TGG GGT GAT GCA TTG TTC GAT ATC ATT GAC AAA GAC CAA AAT	384
Arg Leu Trp Gly Asp Ala Leu Phe Asp Ile Ile Asp Lys Asp Gln Asn	
115 120 125	
GGA GCT ATT TCA CTG GAT GAA TGG AAA GCA TAC ACC AAA TCT GAT GGC	432
Gly Ala Ile Ser Leu Asp Glu Trp Lys Ala Tyr Thr Lys Ser Asp Gly	
130 135 140	
ATC ATC CAA TCG TCA GAA GAT TGC GAG GAA ACA TTC AGA GTG TGC GAT	480
Ile Ile Gln Ser Ser Glu Asp Cys Glu Glu Thr Phe Arg Val Cys Asp	
145 150 155 160	
ATT GAT GAA AGT GGA CAG CTC GAT GTT GAT GAG ATG ACA AGA CAA CAT	528
Ile Asp Glu Ser Gly Gln Leu Asp Val Asp Glu Met Thr Arg Gln His	
165 170 175	
TTA GGA TTT TGG TAC ACC ATG GAT CCT GCT TGC GAA AAG CTC TAC GGT	576
Leu Gly Phe Trp Tyr Thr Met Asp Pro Ala Cys Glu Lys Leu Tyr Gly	
180 185 190	
GGA GCT GTC CCC TAA	591
Gly Ala Val Pro *	
195	

-177-

(2) INFORMATION FOR SEQ ID NO:7:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 591 base pairs
- (B) TYPE: nucleic acid
- (C) STRANDEDNESS: single
- (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(iii) HYPOTHETICAL: NO

(iv) ANTISENSE: NO

(v) FRAGMENT TYPE:

(vi) ORIGINAL SOURCE:

(ix) FEATURE:

(A) NAME/KEY: Coding Sequence

(B) LOCATION: 1...588

(D) OTHER INFORMATION: Recombinant Aequorin AEQ2

(x) PUBLICATION INFORMATION:

(A) AUTHORS: Prasher et al.

(B) TITLE: Sequence Comparisons of Complementary DNAs Encoding Aequorin Isoforms

(C) JOURNAL: Biochemistry

(D) VOLUME: 26

(F) PAGES: 1326-1332

(G) DATE: 1987

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:7:

ATG ACC AGC GAA CAA TAC TCA GTC AAG CTT ACA TCA GAC TTC GAC AAC	48
Met Thr Ser Glu Gln Tyr Ser Val Lys Leu Thr Ser Asp Phe Asp Asn	
1 5 10 15	
CCA AGA TGG ATT GGA CGA CAC AAG CAT ATG TTC AAT TTC CTT GAT GTC	96
Pro Arg Trp Ile Gly Arg His Lys His Met Phe Asn Phe Leu Asp Val	
20 25 30	
AAC CAC AAT GGA AAA ATC TCT CTT GAC GAG ATG GTC TAC AAG GCA TCT	144
Asn His Asn Gly Lys Ile Ser Leu Asp Glu Met Val Tyr Lys Ala Ser	
35 40 45	
GAT ATT GTC ATC AAT AAC CTT GGA GCA ACA CCT GAG CAA GCC AAA CGA	192
Asp Ile Val Ile Asn Asn Leu Gly Ala Thr Pro Glu Gln Ala Lys Arg	
50 55 60	
CAC AAA GAT GCT GTA GAA GCC TTC TTC GGA GGA GCT GGA ATG AAA TAT	240
His Lys Asp Ala Val Glu Ala Phe Phe Gly Gly Ala Gly Met Lys Tyr	
65 70 75 80	
GGT GTG GAA ACT GAT TGG CCT GCA TAT ATT GAA GGA TGG AAA AAA TTG	288
Gly Val Glu Thr Asp Trp Pro Ala Tyr Ile Glu Gly Trp Lys Lys Leu	
85 90 95	
GCT ACT GAT GAA TTG GAG AAA TAC GCC AAA AAC GAA CCA ACG CTC ATC	336
Ala Thr Asp Glu Leu Glu Lys Tyr Ala Lys Asn Glu Pro Thr Leu Ile	
100 105 110	
CGT ATA TGG GGT GAT GCT TTG TTC GAT ATC GTT GAC AAA GAT CAA AAT	384
Arg Ile Trp Gly Asp Ala Leu Phe Asp Ile Val Asp Lys Asp Gln Asn	
115 120 125	

-178-

GGA GCC ATT ACA CTG GAT GAA TGG AAA GCA TAC ACC AAA GCT GCT GGT	432
Gly Ala Ile Thr Leu Asp Glu Trp Lys Ala Tyr Thr Lys Ala Ala Gly	
130 135 140	
ATC ATC CAA TCA TCA GAA GAT TGC GAG GAA ACA TTC AGA GTG TGC GAT	480
Ile Ile Gln Ser Ser Glu Asp Cys Glu Glu Thr Phe Arg Val Cys Asp	
145 150 155 160	
ATT GAT GAA AGT GGA CAA CTC GAT GTT GAT GAG ATG ACA AGA CAA CAT	528
Ile Asp Glu Ser Gly Gln Leu Asp Val Asp Glu Met Thr Arg Gln His	
165 170 175	
TTA GGA TTT TGG TAC ACC ATG GAT CCT GCT TGC GAA AAG CTC TAC GGT	576
Leu Gly Phe Trp Tyr Thr Met Asp Pro Ala Cys Glu Lys Leu Tyr Gly	
180 185 190	
GGA GCT GTC CCC TAA	591
Gly Ala Val Pro *	
195	

(2) INFORMATION FOR SEQ ID NO:8:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 591 base pairs
- (B) TYPE: nucleic acid
- (C) STRANDEDNESS: single
- (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(iii) HYPOTHETICAL: NO

(iv) ANTISENSE: NO

(v) FRAGMENT TYPE:

(vi) ORIGINAL SOURCE:

(ix) FEATURE:

(A) NAME/KEY: Coding Sequence

(B) LOCATION: 1...588

(D) OTHER INFORMATION: Recombinant Aequorin AEQ3

(x) PUBLICATION INFORMATION:

(A) AUTHORS: Prasher et al.

(B) TITLE: Sequence Comparisons of Complementary DNAs Encoding Aequorin Isoforms

(C) JOURNAL: Biochemistry

(D) VOLUME: 26

(F) PAGES: 1326-1332

(G) DATE: 1987

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:8:

ATG ACC AGC GAA CAA TAC TCA GTC AAG CTT ACA TCA GAC TTC GAC AAC	48
Met Thr Ser Glu Gln Tyr Ser Val Lys Leu Thr Ser Asp Phe Asp Asn	
1 5 10 15	
CCA AGA TGG ATT GGA CGA CAC AAG CAT ATG TTC AAT TTC CTT GAT GTC	96
Pro Arg Trp Ile Gly Arg His Lys His Met Phe Asn Phe Leu Asp Val	
20 25 30	
AAC CAC AAT GGA AAA ATC TCT CTT GAC GAG ATG GTC TAC AAG GCA TCT	144
Asn His Asn Gly Lys Ile Ser Leu Asp Glu Met Val Tyr Lys Ala Ser	
35 40 45	

-179-

GAT ATT GTC ATC AAT AAC CTT GGA GCA ACA CCT GAG CAA GCC AAA CGA	192
Asp Ile Val Ile Asn Asn Leu Gly Ala Thr Pro Glu Gln Ala Lys Arg	
50 55 60	
CAC AAA GAT GCT GTA GGA GAC TTC TTC GGA GGA GCT GGA ATG AAA TAT	240
His Lys Asp Ala Val Gly Asp Phe Phe Gly Gly Ala Gly Met Lys Tyr	
65 70 75 80	
GGT GTG GAA ACT GAT TGG CCT GCA TAC ATT GAA GGA TGG AAA AAA TTG	288
Gly Val Glu Thr Asp Trp Pro Ala Tyr Ile Glu Gly Trp Lys Lys Leu	
85 90 95	
GCT ACT GAT GAA TTG GAG AAA TAC GCC AAA AAC GAA CCA ACG CTC ATC	336
Ala Thr Asp Glu Leu Glu Lys Tyr Ala Lys Asn Glu Pro Thr Leu Ile	
100 105 110	
CGT ATA TGG GGT GAT GCT TTG TTC GAT ATC GTT GAC AAA GAT CAA AAT	384
Arg Ile Trp Gly Asp Ala Leu Phe Asp Ile Val Asp Lys Asp Gln Asn	
115 120 125	
GGA GCC ATT ACA CTG GAT GAA TGG AAA GCA TAC ACC AAA GCT GCT GGT	432
Gly Ala Ile Thr Leu Asp Glu Trp Lys Ala Tyr Thr Lys Ala Ala Gly	
130 135 140	
ATC ATC CAA TCA TCA GAA GAT TGC GAG GAA ACA TTC AGA GTG TGC GAT	480
Ile Ile Gln Ser Ser Glu Asp Cys Glu Glu Thr Phe Arg Val Cys Asp	
145 150 155 160	
ATT GAT GAA AAT GGA CAA CTC GAT GTT GAT GAG ATG ACA AGA CAA CAT	528
Ile Asp Glu Asn Gly Gln Leu Asp Val Asp Glu Met Thr Arg Gln His	
165 170 175	
TTA GGA TTT TGG TAC ACC ATG GAT CCT GCT TGC GAA AAG CTC TAC GGT	576
Leu Gly Phe Trp Tyr Thr Met Asp Pro Ala Cys Glu Lys Leu Tyr Gly	
180 185 190	
GGA GCT GTC CCC TAA	591
Gly Ala Val Pro *	
195	

(2) INFORMATION FOR SEQ ID NO:9:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 567 base pairs
- (B) TYPE: nucleic acid
- (C) STRANDEDNESS: single
- (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(iii) HYPOTHETICAL: NO

(iv) ANTISENSE: NO

(v) FRAGMENT TYPE:

(vi) ORIGINAL SOURCE:

(ix) FEATURE:

(A) NAME/KEY: Coding Sequence

(B) LOCATION: 1...567

(D) OTHER INFORMATION: Aequorin photoprotein

(x) PUBLICATION INFORMATION:

(A) AUTHORS: Charbonneau et al.

-180-

(B) TITLE: Amino acid sequence of the calcium-dependent photoprotein aequorin

(C) JOURNAL: Biochemistry

(D) VOLUME: 24

(E) ISSUE: 24

(F) PAGES: 6762-6771

(G) DATE: 1985

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:9:

GTC AAG CTT ACA CCA GAC TTC GAC AAC CCA AAA TGG ATT GGA CGA CAC	48
Val Lys Leu Thr Pro Asp Phe Asp Asn Pro Lys Trp Ile Gly Arg His	
1 5 10 15	
AAG CAC ATG TTT AAT TTT CTT GAT GTC AAC CAC AAT GGA AGG ATC TCT	96
Lys His Met Phe Asn Phe Leu Asp Val Asn His Asn Gly Arg Ile Ser	
20 25 30	
CTT GAC GAG ATG GTC TAC AAG GCG TCC GAT ATT GTT ATA AAC AAT CTT	144
Leu Asp Glu Met Val Tyr Lys Ala Ser Asp Ile Val Ile Asn Asn Leu	
35 40 45	
GGA GCA ACA CCT GAA CAA GCC AAA CGT CAC AAA GAT GCT GTA GAA GCC	192
Gly Ala Thr Pro Glu Gln Ala Lys Arg His Lys Asp Ala Val Glu Ala	
50 55 60	
TTC TTC GGA GGA GCT GCA ATG AAA TAT GGT GTA GAA ACT GAA TGG CCT	240
Phe Phe Gly Gly Ala Ala Met Lys Tyr Gly Val Glu Thr Glu Trp Pro	
65 70 75 80	
GAA TAC ATC GAA GGA TGG AAA AGA CTG GCT TCC GAG GAA TTG AAA AGG	288
Glu Tyr Ile Glu Gly Trp Lys Arg Leu Ala Ser Glu Glu Leu Lys Arg	
85 90 95	
TAT TCA AAA AAC CAA ATC ACA CTT ATT CGT TTA TGG GGT GAT GCA TTG	336
Tyr Ser Lys Asn Gln Ile Thr Leu Ile Arg Leu Trp Gly Asp Ala Leu	
100 105 110	
TTC GAT ATC ATT GAC AAA GAC CAA AAT GGA GCT ATT TCA CTG GAT GAA	384
Phe Asp Ile Ile Asp Lys Asp Gln Asn Gly Ala Ile Ser Leu Asp Glu	
115 120 125	
TGG AAA GCA TAC ACC AAA TCT GCT GGC ATC ATC CAA TCG TCA GAA GAT	432
Trp Lys Ala Tyr Thr Lys Ser Ala Gly Ile Ile Gln Ser Ser Glu Asp	
130 135 140	
TGC GAG GAA ACA TTC AGA GTG TGC GAT ATT GAT GAA AGT GGA CAG CTC	480
Cys Glu Glu Thr Phe Arg Val Cys Asp Ile Asp Glu Ser Gly Gln Leu	
145 150 155 160	
GAT GTT GAT GAG ATG ACA AGA CAA CAT TTA GGA TTT TGG TAC ACC ATG	528
Asp Val Asp Glu Met Thr Arg Gln His Leu Gly Phe Trp Tyr Thr Met	
165 170 175	
GAT CCT GCT TGC GAA AAG CTC TAC GGT GGA GCT GTC CCC	567
Asp Pro Ala Cys Glu Lys Leu Tyr Gly Gly Ala Val Pro	
180 185	

(2) INFORMATION FOR SEQ ID NO:10:

(i) SEQUENCE CHARACTERISTICS:

(A) LENGTH: 588 base pairs

(B) TYPE: nucleic acid

-181-

(C) STRANDEDNESS: single

(D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(iii) HYPOTHETICAL: NO

(iv) ANTISENSE: NO

(v) FRAGMENT TYPE:

(vi) ORIGINAL SOURCE:

(ix) FEATURE:

(A) NAME/KEY: Coding Sequence

(B) LOCATION: 1...588

(D) OTHER INFORMATION: Aequorin mutant w/increased bioluminescence activity

(x) PUBLICATION INFORMATION:

PATENT NO.: 5,360,728

(K) RELEVANT RESIDUES IN SEQ ID NO: 10:

Asp 124 changed to Ser

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:10:

ATG ACC AGC GAA CAA TAC TCA GTC AAG CTT ACA CCA GAC TTC GAC AAC	48
Met Thr Ser Glu Gln Tyr Ser Val Lys Leu Thr Pro Asp Phe Asp Asn	
1 5 10 15	
CCA AAA TGG ATT GGA CGA CAC AAG CAC ATG TTT AAT TTT CTT GAT GTC	96
Pro Lys Trp Ile Gly Arg His Lys His Met Phe Asn Phe Leu Asp Val	
20 25 30	
AAC CAC AAT GGA AGG ATC TCT CTT GAC GAG ATG GTC TAC AAG GCG TCC	144
Asn His Asn Gly Arg Ile Ser Leu Asp Glu Met Val Tyr Lys Ala Ser	
35 40 45	
GAT ATT GTT ATA AAC AAT CTT GGA GCA ACA CCT GAA CAA GCC AAA CGT	192
Asp Ile Val Ile Asn Asn Leu Gly Ala Thr Pro Glu Gln Ala Lys Arg	
50 55 60	
CAC AAA GAT GCT GTA GAA GCC TTC TTC GGA GGA GCT GCA ATG AAA TAT	240
His Lys Asp Ala Val Glu Ala Phe Phe Gly Gly Ala Ala Met Lys Tyr	
65 70 75 80	
GGT GTA GAA ACT GAA TGG CCT GAA TAC ATC GAA GGA TGG AAA AGA CTG	288
Gly Val Glu Thr Glu Trp Pro Glu Tyr Ile Glu Gly Trp Lys Arg Leu	
85 90 95	
GCT TCC GAG GAA TTG AAA AGG TAT TCA AAA AAC CAA ATC ACA CTT ATT	336
Ala Ser Glu Glu Leu Lys Arg Tyr Ser Lys Asn Gln Ile Thr Leu Ile	
100 105 110	
CGT TTA TGG GGT GAT GCA TTG TTC GAT ATC ATT TCC AAA GAC CAA AAT	384
Arg Leu Trp Gly Asp Ala Leu Phe Asp Ile Ile Ser Lys Asp Gln Asn	
115 120 125	
GGA GCT ATT TCA CTG GAT GAA TGG AAA GCA TAC ACC AAA TCT GCT GGC	432
Gly Ala Ile Ser Leu Asp Glu Trp Lys Ala Tyr Thr Lys Ser Ala Gly	
130 135 140	
ATC ATC CAA TCG TCA GAA GAT TGC GAG GAA ACA TTC AGA GTG TGC GAT	480
Ile Ile Gln Ser Ser Glu Asp Cys Glu Glu Thr Phe Arg Val Cys Asp	
145 150 155 160	

-182-

ATT GAT GAA AGT GGA CAG CTC GAT GTT GAT GAG ATG ACA AGA CAA CAT	528
Ile Asp Glu Ser Gly Gln Leu Asp Val Asp Glu Met Thr Arg Gln His	
165 170 175	
TTA GGA TTT TGG TAC ACC ATG GAT CCT GCT TGC GAA AAG CTC TAC GGT	576
Leu Gly Phe Trp Tyr Thr Met Asp Pro Ala Cys Glu Lys Leu Tyr Gly	
180 185 190	
GGA GCT GTC CCC	588
Gly Ala Val Pro	
195	

(2) INFORMATION FOR SEQ ID NO:11:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 588 base pairs
- (B) TYPE: nucleic acid
- (C) STRANDEDNESS: single
- (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(iii) HYPOTHETICAL: NO

(iv) ANTISENSE: NO

(v) FRAGMENT TYPE:

(vi) ORIGINAL SOURCE:

(ix) FEATURE:

(A) NAME/KEY: Coding Sequence

(B) LOCATION: 1...588

(D) OTHER INFORMATION: Recombinant site-directed Aequerin mutant w/increased biolum. activity

(x) PUBLICATION INFORMATION:

PATENT NO.: 5,360,728

(K) RELEVANT RESIDUES IN SEQ ID NO:11:

Glu 135 changed to Ser

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:11:

ATG ACC AGC GAA CAA TAC TCA GTC AAG CTT ACA CCA GAC TTC GAC AAC	48
Met Thr Ser Glu Gln Tyr Ser Val Lys Leu Thr Pro Asp Phe Asp Asn	
1 5 10 15	
CCA AAA TGG ATT GGA CGA CAC AAG CAC ATG TTT AAT TTT CTT GAT GTC	96
Pro Lys Trp Ile Gly Arg His Lys His Met Phe Asn Phe Leu Asp Val	
20 25 30	
AAC CAC AAT GGA AGG ATC TCT CTT GAC GAG ATG GTC TAC AAG GCG TCC	144
Asn His Asn Gly Arg Ile Ser Leu Asp Glu Met Val Tyr Lys Ala Ser	
35 40 45	
GAT ATT GTT ATA AAC AAT CTT GGA GCA ACA CCT GAA CAA GCC AAA CGT	192
Asp Ile Val Ile Asn Asn Leu Gly Ala Thr Pro Glu Gln Ala Lys Arg	
50 55 60	
CAC AAA GAT GCT GTA GAA GCC TTC TTC GGA GGA GCT GCA ATG AAA TAT	240
His Lys Asp Ala Val Glu Ala Phe Phe Gly Gly Ala Ala Met Lys Tyr	
65 70 75 80	
GGT GTA GAA ACT GAA TGG CCT GAA TAC ATC GAA GGA TGG AAA AGA CTG	288

-183-

Gly	Val	Glu	Thr	Glu	Trp	Pro	Glu	Tyr	Ile	Glu	Gly	Trp	Lys	Arg	Leu	
				85					90					95		
GCT	TCC	GAG	GAA	TTG	AAA	AGG	TAT	TCA	AAA	AAC	CAA	ATC	ACA	CTT	ATT	336
Ala	Ser	Glu	Glu	Leu	Lys	Arg	Tyr	Ser	Lys	Asn	Gln	Ile	Thr	Leu	Ile	
			100					105					110			
CGT	TTA	TGG	GGT	GAT	GCA	TTG	TTC	GAT	ATC	ATT	TCC	AAA	GAC	CAA	AAT	384
Arg	Leu	Trp	Gly	Asp	Ala	Leu	Phe	Asp	Ile	Ile	Ser	Lys	Asp	Gln	Asn	
			115				120					125				
GGA	GCT	ATT	TCA	CTG	GAT	TCA	TGG	AAA	GCA	TAC	ACC	AAA	TCT	GCT	GGC	432
Gly	Ala	Ile	Ser	Leu	Asp	Ser	Trp	Lys	Ala	Tyr	Thr	Lys	Ser	Ala	Gly	
			130				135				140					
ATC	ATC	CAA	TCG	TCA	GAA	GAT	TGC	GAG	GAA	ACA	TTC	AGA	GTG	TGC	GAT	480
Ile	Ile	Gln	Ser	Ser	Glu	Asp	Cys	Glu	Glu	Thr	Phe	Arg	Val	Cys	Asp	
145					150					155					160	
ATT	GAT	GAA	AGT	GGA	CAG	CTC	GAT	GTT	GAT	GAG	ATG	ACA	AGA	CAA	CAT	528
Ile	Asp	Glu	Ser	Gly	Gln	Leu	Asp	Val	Asp	Glu	Met	Thr	Arg	Gln	His	
				165				170						175		
TTA	GGA	TTT	TGG	TAC	ACC	ATG	GAT	CCT	GCT	TGC	GAA	AAG	CTC	TAC	GGT	576
Leu	Gly	Phe	Trp	Tyr	Thr	Met	Asp	Pro	Ala	Cys	Glu	Lys	Leu	Tyr	Gly	
			180					185					190			
GGA	GCT	GTC	CCC													588
Gly	Ala	Val	Pro													
			195													

(2) INFORMATION FOR SEQ ID NO:12:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 588 base pairs
- (B) TYPE: nucleic acid
- (C) STRANDEDNESS: single
- (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(iii) HYPOTHETICAL: NO

(iv) ANTISENSE: NO

(v) FRAGMENT TYPE:

(vi) ORIGINAL SOURCE:

(ix) FEATURE:

- (A) NAME/KEY: Coding Sequence
- (B) LOCATION: 1...588
- (D) OTHER INFORMATION: Recombinant site-directed Aequorin mutant w/increased biolum. activity

(x) PUBLICATION INFORMATION:

PATENT NO.: 5,360,728

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:12:

ATG	ACC	AGC	GAA	CAA	TAC	TCA	GTC	AAG	CTT	ACA	CCA	GAC	TTC	GAC	AAC	48
Met	Thr	Ser	Glu	Gln	Tyr	Ser	Val	Lys	Leu	Thr	Pro	Asp	Phe	Asp	Asn	
1				5				10					15			
CCA	AAA	TGG	ATT	GGA	CGA	CAC	AAG	CAC	ATG	TTT	AAT	TTT	CTT	GAT	GTC	96
Pro	Lys	Trp	Ile	Gly	Arg	His	Lys	His	Met	Phe	Asn	Phe	Leu	Asp	Val	
			20				25					30				

-184-

AAC CAC AAT GGA AGG ATC TCT CTT GAC GAG ATG GTC TAC AAG GCG TCC	144
Asn His Asn Gly Arg Ile Ser Leu Asp Glu Met Val Tyr Lys Ala Ser	
35 40 45	
GAT ATT GTT ATA AAC AAT CTT GGA GCA ACA CCT GAA CAA GCC AAA CGT	192
Asp Ile Val Ile Asn Asn Leu Gly Ala Thr Pro Glu Gln Ala Lys Arg	
50 55 60	
CAC AAA GAT GCT GTA GAA GCC TTC TTC GGA GGA GCT GCA ATG AAA TAT	240
His Lys Asp Ala Val Glu Ala Phe Phe Gly Gly Ala Ala Met Lys Tyr	
65 70 75 80	
GGT GTA GAA ACT GAA TGG CCT GAA TAC ATC GAA GGA TGG AAA AGA CTG	288
Gly Val Glu Thr Glu Trp Pro Glu Tyr Ile Glu Gly Trp Lys Arg Leu	
85 90 95	
GCT TCC GAG GAA TTG AAA AGG TAT TCA AAA AAC CAA ATC ACA CTT ATT	336
Ala Ser Glu Glu Leu Lys Arg Tyr Ser Lys Asn Gln Ile Thr Leu Ile	
100 105 110	
CGT TTA TGG GGT GAT GCA TTG TTC GAT ATC ATT TCC AAA GAC CAA AAT	384
Arg Leu Trp Gly Asp Ala Leu Phe Asp Ile Ile Ser Lys Asp Gln Asn	
115 120 125	
GCA GCT ATT TCA CTG GAT GAA TGG AAA GCA TAC ACC AAA TCT GCT GGC	432
Ala Ala Ile Ser Leu Asp Glu Trp Lys Ala Tyr Thr Lys Ser Ala Gly	
130 135 140	
ATC ATC CAA TCG TCA GAA GAT TGC GAG GAA ACA TTC AGA GTG TGC GAT	480
Ile Ile Gln Ser Ser Glu Asp Cys Glu Glu Thr Phe Arg Val Cys Asp	
145 150 155 160	
ATT GAT GAA AGT GGA CAG CTC GAT GTT GAT GAG ATG ACA AGA CAA CAT	528
Ile Asp Glu Ser Gly Gln Leu Asp Val Asp Glu Met Thr Arg Gln His	
165 170 175	
TTA GGA TTT TGG TAC ACC ATG GAT CCT GCT TGC GAA AAG CTC TAC GGT	576
Leu Gly Phe Trp Tyr Thr Met Asp Pro Ala Cys Glu Lys Leu Tyr Gly	
180 185 190	
GGA GCT GTC CCC	588
Gly Ala Val Pro	
195	

(2) INFORMATION FOR SEQ ID NO:13:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 567 base pairs
- (B) TYPE: nucleic acid
- (C) STRANDEDNESS: single
- (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: cDNA

(ix) FEATURE:

- (A) NAME/KEY: Coding Sequence
- (B) LOCATION: 1...567
- (D) OTHER INFORMATION: Recombinant apoaeguorin (AQUALITE®)

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:13:

GTC AAG CTT ACA CCA GAC TTC GAC AAC CCA AAA TGG ATT GGA CGA CAC	48
---	----

-185-

Val	Lys	Leu	Thr	Pro	Asp	Phe	Asp	Asn	Pro	Lys	Trp	Ile	Gly	Arg	His	
1				5					10					15		
AAG	CAC	ATG	TTT	AAT	TTT	CTT	GAT	GTC	AAC	CAC	AAT	GGA	AGG	ATC	TCT	96
Lys	His	Met	Phe	Asn	Phe	Leu	Asp	Val	Asn	His	Asn	Gly	Arg	Ile	Ser	
			20					25					30			
CTT	GAC	GAG	ATG	GTC	TAC	AAG	GCG	TCC	GAT	ATT	GTT	ATA	AAC	AAT	CTT	144
Leu	Asp	Glu	Met	Val	Tyr	Lys	Ala	Ser	Asp	Ile	Val	Ile	Asn	Asn	Leu	
		35					40					45				
GGA	GCA	ACA	CCT	GAA	CAA	GCC	AAA	CGT	CAC	AAA	GAT	GCT	GTA	GAA	GCC	192
Gly	Ala	Thr	Pro	Glu	Gln	Ala	Lys	Arg	His	Lys	Asp	Ala	Val	Glu	Ala	
	50					55					60					
TTC	TTC	GGA	GGA	GCT	GGA	ATG	AAA	TAT	GGT	GTA	GAA	ACT	GAA	TGG	CCT	240
Phe	Phe	Gly	Gly	Ala	Gly	Met	Lys	Tyr	Gly	Val	Glu	Thr	Glu	Trp	Pro	
65					70				75						80	
GAA	TAC	ATC	GAA	GGA	TGG	AAA	AAA	CTG	GCT	TCC	GAG	GAA	TTG	AAA	AGG	288
Glu	Tyr	Ile	Glu	Gly	Trp	Lys	Lys	Leu	Ala	Ser	Glu	Glu	Leu	Lys	Arg	
				85				90						95		
TAT	TCA	AAA	AAC	CAA	ATC	ACA	CTT	ATT	CGT	TTA	TGG	GGT	GAT	GCA	TTG	336
Tyr	Ser	Lys	Asn	Gln	Ile	Thr	Leu	Ile	Arg	Leu	Trp	Gly	Asp	Ala	Leu	
			100					105					110			
TTC	GAT	ATC	ATT	GAC	AAA	GAC	CAA	AAT	GGA	GCT	ATT	CTG	TCA	GAT	GAA	384
Phe	Asp	Ile	Ile	Asp	Lys	Asp	Gln	Asn	Gly	Ala	Ile	Leu	Ser	Asp	Glu	
		115					120					125				
TGG	AAA	GCA	TAC	ACC	AAA	TCT	GAT	GGC	ATC	ATC	CAA	TCG	TCA	GAA	GAT	432
Trp	Lys	Ala	Tyr	Thr	Lys	Ser	Asp	Gly	Ile	Ile	Gln	Ser	Ser	Glu	Asp	
	130					135					140					
TGC	GAG	GAA	ACA	TTC	AGA	GTG	TGC	GAT	ATT	GAT	GAA	AGT	GGA	CAG	CTC	480
Cys	Glu	Glu	Thr	Phe	Arg	Val	Cys	Asp	Ile	Asp	Glu	Ser	Gly	Gln	Leu	
145					150					155					160	
GAT	GTT	GAT	GAG	ATG	ACA	AGA	CAA	CAT	TTA	GGA	TTT	TGG	TAC	ACC	ATG	528
Asp	Val	Asp	Glu	Met	Thr	Arg	Gln	His	Leu	Gly	Phe	Trp	Tyr	Thr	Met	
				165				170						175		
GAT	CCT	GCT	TGC	GAA	AAG	CTC	TAC	GGT	GGA	GCT	GTC	CCC				567
Asp	Pro	Ala	Glu	Lys	Leu	Tyr		Gly	Gly	Ala	Val	Pro				
			180					185								

(2) INFORMATION FOR SEQ ID NO:14:

(i) SEQUENCE CHARACTERISTICS:

- (A) LENGTH: 236 amino acids
- (B) TYPE: amino acid
- (D) TOPOLOGY: linear

(ii) MOLECULE TYPE: protein

(x) PUBLICATION INFORMATION:

PATENT NO.: 5,484,723

(ix) FEATURE:

(D) OTHER INFORMATION: *Vibrio fisheri* Flavin reductase

(xi) SEQUENCE DESCRIPTION: SEQ ID NO:14:

-186-

Met Pro Ile Asn Cys Lys Val Lys Ser Ile Glu Pro Leu Ala Cys Asn
 1 5 10 15
 Thr Phe Arg Ile Leu Leu His Pro Glu Gln Pro Val Ala Phe Lys Ala
 20 25 30
 Gly Gln Tyr Leu Thr Val Val Met Gly Glu Lys Asp Lys Arg Pro Phe
 35 40 45
 Ser Ile Ala Ser Ser Pro Cys Arg His Glu Gly Glu Ile Glu Leu His
 50 55 60
 Ile Gly Ala Ala Glu His Asn Ala Tyr Ala Gly Glu Val Val Glu Ser
 65 70 75 80
 Met Lys Ser Ala Leu Glu Thr Gly Gly Asp Ile Leu Ile Asp Ala Pro
 85 90 95
 His Gly Glu Ala Trp Ile Arg Glu Asp Ser Asp Arg Ser Met Leu Leu
 100 105 110
 Ile Ala Gly Gly Thr Gly Phe Ser Tyr Val Arg Ser Ile Leu Asp His
 115 120 125
 Cys Ile Ser Gln Gln Ile Gln Lys Pro Ile Tyr Leu Tyr Trp Gly Gly
 130 135 140
 Arg Asp Glu Cys Gln Leu Tyr Ala Lys Ala Glu Leu Glu Ser Ile Ala
 145 150 155 160
 Gln Ala His Ser His Ile Thr Phe Val Pro Val Val Glu Lys Ser Glu
 165 170 175
 Gly Trp Thr Gly Lys Thr Gly Asn Val Leu Glu Ala Val Lys Ala Asp
 180 185 190
 Phe Asn Ser Leu Ala Asp Met Asp Ile Tyr Ile Ala Gly Arg Phe Glu
 195 200 205
 Met Ala Gly Ala Ala Arg Glu Gln Phe Thr Thr Glu Lys Gln Ala Lys
 210 215 220
 Lys Glu Gln Leu Phe Gly Asp Ala Phe Ala Phe Ile
 225 230 235



-187-

CLAIMS:

1. A combination, comprising:
an article of manufacture; and a bioluminescence generating system, whereby the combination is a novelty item.
- 5 2. A combination, comprising:
a) an inanimate article of manufacture; and
b) one or more components of a bioluminescence generating system, whereby the combination is a novelty item.
3. The combination of claim 1 or 2, wherein the combination
10 comprises a luciferase.
4. The combination of claim 1 or 2, wherein the combination comprises a luciferin.
5. The combination of claim 1 or 2, wherein the article of
manufacture is selected from among toys, decorative lanterns, fountains,
15 personal care items, fairy dust, beverages, soft drinks, foods, textile products, bubbles, balloons, personal items, dentifrices, soaps, body paints, and bubble bath, ink and paper products.
6. The combination of claim 1 or 2, wherein the article of
manufacture is selected from among toy guns, pellet guns, finger paints, foot
20 bags, slimy play material, clothing, bubble making toys, bath powders, body lotions, gels, body powders, body creams, toothpastes, mouthwashes, soaps, body paints, bubble bath; inks, wrapping paper, gelatins, icings, frostings, beer, wine, champagne, soft drinks, ice cubes, ice, dry ice and fountains.
7. The combination of claim 1 or claim 2 that is a toy gun.
- 25 8. The combination of claim 1 or claim 2 that is a beverage.
9. The combination of claim 1 or claim 2 that is a fountain.
10. The combination of claim 1 or claim 2 that produces water fireworks.
11. The combination of claim 1 or claim 2 that is a bubble making
30 toy.
12. A delivery vehicle, comprising at least one component of a bioluminescence generating system.





-188-

13. The vehicle of claim 12, wherein the components comprise a luciferin, a luciferase or a luciferin and a luciferase.

14. The vehicle of claim 12 or claim 13 wherein the vehicle is a liposome or a gelatin capsule.

5 15. The vehicle of any of claims 12-14, comprising micronized particles of the component(s).

16. An article of manufacture, comprising the delivery vehicle of any of claims 12-15, whereby the article of manufacture is a novelty item.

10 17. A combination, comprising the delivery vehicle of any of claims 12-15 and an article of manufacture selected from among beverages, foods, body lotion, body cream, body paint, bubble compositions, fountains and toys.

18. The vehicle of claim 14, wherein the liposome or capsule is is temperature, light or pH sensitive or water soluble or any combination thereof.

19. The article of manufacture of claim 16 that is fairy dust.

15 20. A matrix material, comprising a component of a bioluminescence generating system.

21. The matrix of claim 20 that is selected from among cotton, polyester, polyester-cotton blends, polypropylene, polyvinyltoluene, polyvinyl propylene, celluloses, cellulose derivatives, acrylic resins, glass, silicon, 20 ceramics, silica gels, polystyrene, gelatins, polyacrylates, polyvinyl pyrrolidone, co-polymers of vinyl, polyacrylamides, latex gels, dextran, rubber, silicon, plastics, nitrocellulose, celluloses, natural sponges, synthetic sponges and porous glass.

22. An article of manufacture, comprising the matrix material of claim 25 20 or claim 21, whereby the article is a novelty item.

23. The article of manufacture of claim 22 that is an item of clothing.

24. The combination of claim 1 or claim 2, wherein the system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system, a crustacea system, a fish 30 system, an annelid system, and an earthworm system.





-189-

25. The combination of any of claims 1, 2 and 24, wherein the system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Aristostomias*, *Odontosyllis*, *Oplophorus*, firefly, and bacterial systems.

26. A cartridge for loading a novelty item with components of a
5 bioluminescence generating system, comprising:

a body comprising a chamber with an exit for delivering contents of the chamber;

a matrix material in the chamber; and

a plunger in the chamber, wherein the plunger comprises a piston that is
10 adapted to deliver a material linked to the matrix through the exit.

27. The cartridge of claim 26, further comprising a bioluminescence generating reagent linked to the matrix material.

28. The cartridge of claim 27, wherein the reagent is a luciferin or luciferase

15 29. The cartridge of claim 26 that is adapted to deliver any contents into a an article of manufacture selected from toy guns, pellet guns, bubble making toys, beverage containers, and toothpaste containers.

30. A cartridge for loading a novelty item with components of a bioluminescence generating system, comprising:

20 a body comprising a chamber with an exit for delivering contents of the chamber;

a matrix material in the chamber; and

a plunger in the chamber, wherein:

the plunger comprises a piston that is adapted to deliver a material linked
25 to the matrix through the exit;

the cartridge is adapted to deliver its contents to the combination of claim 1.

31. The cartridge of claim 27, comprising:

a body comprising two chambers each having an exit;

30 a plunger means comprising a first piston aligned with the first chamber, and a second piston aligned with the second chamber;





-190-

whereby urging the plunger towards the body causes the first piston to pressurize the first chamber thereby forcing the contents of the first chamber out the exit of the first chamber, and causes the second piston to pressurize the second chamber thereby forcing the contents of the second chamber out the exit of the second chamber; and

a matrix material positioned within at least one of the chambers; wherein the pressurization of the chamber containing the matrix material forces any contents within this chamber through the matrix material, whereby material linked to the matrix is flushed out of the exit.

32. The cartridge of claim 31, further comprising a matrix material in at least one of the chambers, wherein one or more of the reagents of a bioluminescence generating system are linked to a matrix material.

33. The cartridge of claim 27 or claim 32, wherein the bioluminescence generating system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system, a crustacea system, a fish system, an annelid system, and an earthworm system.

34. The cartridge of any of claims 26-33, further comprising a locking device that prevents compression of the plunger.

35. The cartridge of claim 26-34, wherein the bioluminescence generating system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system, a crustacea system, a fish system, an annelid system, and an earthworm system.

36. The cartridge of claim 35, wherein the bioluminescence generating system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Odontosyllis*, *Aristostomias*, *Oplopharus*, firefly, and bacterial systems.

37. A method of recharging a bioluminescent novelty item having at least one filler port, comprising the steps of:

positioning a dispensing cartridge of any of claims 26-36 adjacent to a filler port(s) of a novelty item, the dispensing cartridge containing a matrix





-191-

material comprising a bioluminescence generating reagent and having a means for dispensing the reagent from the dispensing cartridge; and

operating the dispensing means to dispense the reagent from the dispensing cartridge through the filler ports and into the novelty item.

5 38. The method of claim 37, wherein the novelty item is a toy gun.

39. A transgenic fish, comprising DNA encoding a luciferase.

40. The toy gun of claim 7, wherein the bioluminescence generating system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system, a crustacea system, 10 a fish system, an annelid system, and an earthworm system.

41. The toy gun of claim 40, wherein the bioluminescence generating system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Odontosyllis*, *Aristostomias*, *Oplophorus*, firefly, and bacterial systems.

42. The toy gun of claim 40 or claim 41, comprising two chambers, 15 wherein one chamber contains a composition comprising up to all except one component of a bioluminescence generating system, and the other chamber contains a composition comprising the remaining component(s).

43. A kit comprising a toy gun of any of claims 7 and 40-42 and a loading or charging cartridge comprising one or more components of a 20 bioluminescence generating system.

44. Plant food, comprising a luciferin in a carrier suitable for delivering nutrients to a plant.


45. A container, comprising the apparatus set forth in FIGURES 12 and 13 or FIGURE 11 or FIGURE 15 or FIGURES 16 and 17 or FIGURES 18 and 25 19 or comprising the container/bladder apparatus, set forth in FIGURE 14.

46. A combination, comprising:
the container of claim 45; and
one or more components of a bioluminescence generating system.

47. A fluid dispensing apparatus, comprising:
30 a) two chambers, each having an upper end and a lower end;
b) a gas chamber in communication with the upper end of the two chambers and adapted to receive a canister of pressurized gas;



* C L M S *



-192-

c) a mixing chamber in communication with the lower end of the chambers; and

d) a nozzle operatively attached to the mixing chamber.

48. The fluid dispensing apparatus of claim 47, further comprising
5 removable separation means situated between the two chambers and the mixing chamber, selected from among blow-out plugs, one-way valves and pneumatic valves.

49. The apparatus of claim 47 or claim 48, containing a composition comprising one or more components of a bioluminescence generating system.

10 50. A method of producing a glowing beverage, comprising:
adding the components of a bioluminescence generating system and a fluorescent protein to a beverage, whereby the beverage glows.

51. The method of claim 50, further comprising adding a fluorescent protein.

15 52. A fountain, comprising bioluminescence generating components, whereby the resulting spray of water glows.

53. A compressible dispensing apparatus, comprising:

a) a compressible housing having a dispensing end;

20 b) two chambers within the housing, each in fluid communication with the dispensing end of the housing and each containing a mixture;


25 c) a cap apparatus adapted to removably attach to the dispensing end of the housing and having a mixing chamber and top cap, wherein the top cap is situated distal to the dispensing end of the housing; and

d) a membrane seal situated between the dispensing end of the housing and the cap apparatus.

54. The combination of claim 1 or claim, further comprising means for delivering the remaining components of the bioluminescence generating system.

30 55. The combination of claim 54, wherein the delivering means is selected from among a wand, a sponge, a spray bottle, an eyedropper, cotton and a textile.





-193-

56. The combination of claim 1 or claim 2, wherein the article of manufacture is an egg-shaped toy that comprises the bioluminescence generating system.

57. The combination of claim 1 or claim 2, wherein the article of manufacture is a footbag that comprises the bioluminescence generating system.

58. A container apparatus, comprising:

- a) a container having a top end, a neck and a bottom end;
- b) a piercing needle located at the bottom end of the bottle;
- c) a bladder situated, non-permanently, within the neck of the

container;

d) a cap having a plunger operatively attached to its inside surface, wherein the cap is adapted to removably attach to the top end of the container including along a portion of the neck of the container; and

e) a collar adapted to removably encircle the exterior of the neck of the container such that the cap can be securely attached to the top of the container when the collar is in place and can be securely attached to the top and along the neck of the bottle when the collar is removed.

59. A combination, comprising:

the apparatus of claim 58; and
one or more components of a bioluminescence generating system.

60. A volcano-shaped fluid dispensing apparatus, comprising:

a) a first half-conical chamber having a first interior edge and a top end which is smaller than its bottom end;

b) a second half-conical chamber having a second interior edge and a top end which is smaller than its bottom end, wherein the second chamber is attached, along its second interior edge to the first chamber along its first interior edge;



* C L M S *

-194-

c) a gas chamber defined by the first interior edge of the first chamber and by the second interior edge of the second chamber and which is adapted to receive a canister of pressurized gas;

5 d) a gas conduit in communication with the gas chamber and each of the chambers, which gas conduit is defined by the first interior edge of the first chamber and the second interior edge of the second chamber;

10 e) a mixing chamber in communication with each of the chambers at the bottom end of the chambers, the mixing chamber is defined by the first interior edge of the first chamber and the second interior edge of the second chamber; and

15 f) a nozzle in attached to the mixing chamber and extending from the mixing chamber to the top end of the chambers, wherein the nozzle is defined by the first interior edge of the first chamber and the second interior edge of the second chamber.

61. The volcano-shaped fluid dispensing apparatus of claim 60, further comprising:

20 g) removable separation means situated between the gas conduit and each of the chambers, and selected from among blow-out plugs, one-way valves and pneumatic valves; and

h) removable separation means situated between each of the chambers and the mixing chamber, and selected from among blow-out plugs, one-way valves and pneumatic valves.

25 62. A combination, comprising:
the apparatus of claim 61; and
one or more components of a bioluminescence generating system.

63. A fluid dispensing apparatus, comprising:

30 a) two chambers, each having an upper end and a lower end and each having a gas inlet in the upper end and a fluid outlet in the lower end;





-195-

- b) a gas chamber adapted to receive a canister of pressurized gas, situated between the chambers and having a top end, a gas outlet within the top end and a base end;
- 5 c) an upper support operatively attached across the upper ends of the chambers and the top end of the gas chamber;
- d) two gas conduits, contained within the upper support and each operatively attached to the gas outlet of the gas chamber and operatively attached to a different of the gas inlets of the chambers;
- 10 e) a gas control valve operatively attached to the gas chamber, such that the flow of gas from the gas chamber into the gas conduits is regulable;
- f) a mixing chamber having a bottom inlet and top outlet and situated between the chambers;
- 15 g) a base support operatively attached across the lower ends of the chambers and the bottom inlet of the mixing chamber;
- h) two fluid ports contained within the base support, each of the fluid ports is operatively attached to the bottom inlet of the mixing chamber and operatively attached to the lower end of the chambers;
- 20 i) two removable separation means, each situated within the fluid ports between the chambers and the mixing chamber and each, independently selected from among blow-out plugs, one-way valves and pneumatic valves; and
- j) a nozzle operatively attached to the mixing chamber and extending through the upper support.
- 25 64. A combination, comprising:
the apparatus of claim 63; and
one or more components of a bioluminescence generating system.
65. A combination, comprising:
a fluid dispensing apparatus that comprises:
- 30 a) a first chamber;
b) a second collapsible chamber, attached to the bottom end of and in communication with the first chamber; and



* C L N S *



-196-

c) a removable separation means between the first chamber and the second chamber.; and

one or more components of a bioluminescence generating system.

66. The fluid-containing apparatus of claim 65, comprising:

5

a) a first chamber having a bottom opening;

b) a second chamber having a top opening in communication with the bottom opening of the first chamber and is operatively attached to the bottom end of the first chamber and adapted to collapse against the first chamber; and

10

c) a rupturable membrane situated between the bottom opening of the first chamber and the top opening of the second chamber.

67. The apparatus of claim 65, further comprising a cap, attached to the top end of the first chamber, having a bubble-blowing wand integral thereto and situated within the apparatus.

15

68. A combination, comprising:

the fluid dispensing apparatus of any of claims 65-67; and one or more components of a bioluminescence generating system.

69. A beverage comprising one or more components of a bioluminescence generating system.

20

70. The beverage of claim 69, selected from among beer, wine, champagne, and soft drinks.

71. Ice, comprising one or more components of a bioluminescence generating system.

72. The ice of claim 71 that is dry ice.

25

73. The combination of claim 1 or claim 2, wherein the component(s) is encapsulated in a vacuole or an endosome.

74. The combination of claim 73, wherein the system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Odontosyllis*, *Oplophorus*, *Aristostomias*, firefly, and bacterial systems.

30

75. The combination of claim 1 or claim 2, comprising all components of the system except the activator that is required to initiate bioluminescence.



* C L H S *



-197-

76. The combination of claim 1 or claim 2, wherein the system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Odontosyllis*, *Oplophorus*, *Aristostomias*, firefly, glow worm and bacterial systems.

5 77. The combination of claim 1 or claim 2, comprising one or more of a luciferase, luciferin and activator.

78. An isolated vacuole or endosome, comprising a luciferase.

79. A method of producing an isolated vacuole that contains a luciferase, comprising expressing DNA encoding a luciferase in a host organism;
10 and isolating the intact vacuoles from the host.

Oplophorus, *Aristostomias*, firefly and glow worm systems.

80. The combination of claim 1 or claim 2, wherein the article of manufacture comprises the apparatus set forth in FIGURES 20 and 21.

81. The combination of claim 80, further comprising the pellet of
15 FIGURE 22, wherein the pellet includes one or more bioluminescence-generating reagents.

82. A spray container apparatus, comprising a housing portion having a top housing end and a bottom housing end and a plunger portion having a top end and a bottom end, wherein:

20 a) the top end of the plunger portion is open and sized to receive the bottom housing end;

b) the plunger portion has an inner bottom surface that forms a plunger;

25 c) an angular seal is situated on the inner bottom surface of the plunger portion and surrounds the plunger;

d) the bottom housing end of the housing portion is adapted to attach securely within the top end of the plunger portion, contacting the angular seal when so attached;

30 e) the bottom housing end has an indentation having a top wall and side walls, wherein:

the top wall is adapted to at least partially break away from the side walls when pressure is applied to the top wall; and



* C L M S *



-198-

f) the housing portion contains a dispensing mechanism.

83. A spray container apparatus of claim 82, further comprising a pellet that fits within the indentation of the bottom housing end.

84. The combination of claim 1 or claim 2, wherein the article of
5 manufacture is a toy cigarette or cigarette-shaped.

85. The combination of claim 84, wherein the article of manufacture is a toy cigarette, comprising:

a) a tubular delivery vehicle;

b) filters covering each end of the tubular delivery vehicle;

10 and

c) particles comprising bioluminescence generating system components in the tubular delivery vehicle, wherein the particles are smaller than the pores of the filters.

86. Fish food, comprising a luciferin or a luciferase.

15 87. A combination, comprising:

an article of manufacture; and a fluorescent protein, whereby the combination is a novelty item.

88. The combination of claim 87, wherein the article of manufacture is food.

20 89. The combination of claim 88, wherein the food is a beverage.

90. The combination of claim 87, wherein the article of manufacture is a toy.

91. The combination of claim 90, wherein the toy is a bubble-toy.

25 92. The combination of claim 89, wherein the beverage is a soft drink.

93. The combination of any of claims 87-92, further comprising one or more components of a bioluminescence generating system.

94. The combination of any of claims 87-93, wherein the fluorescent protein is encapsulated in a time-release vehicle.

30 95. The combination of claim 89, wherein the beverage is an alcoholic beverage.





-199-

96. The combination of any of claims 87-95, wherein the fluorescent protein is selected from green fluorescent protein, blue fluorescent protein and phycobiliprotein.

5 97. The method of claim 51, wherein the fluorescent protein is encapsulated in a time-release vehicle.

98. The toy gun of any of claims 7 or 40-42, comprising:
a cartridge having at least one chamber for receiving the
bioluminescence generating reagents;
a body having a handle and a cartridge receptacle for receiving the
10 cartridge;
at least one container attachable to the cartridge receptacle for storing a
quantity of fluid; and
a means for injecting the contents of the cartridge into the container
whereby the contents of the chamber mix with the fluid to form a composition
15 containing bioluminescence generating reagents.

99. The squirt gun of claim 98, further comprising:
a barrel having a mixing chamber in fluid communication with the
container, the barrel having a nozzle in fluid communication with the mixing
chamber;
20 a means for drawing the composition containing the bioluminescence
generating reagents into the mixing chamber; and
a means for forcibly ejecting the composition within the mixing chamber
from the mixing chamber and out through the nozzle.

100. The toy gun of claim 99, wherein the means for drawing the
25 composition comprises:

the barrel being extendable from the body; and
a chamber valve disposed within the mixing chamber so that when the
barrel is extended, the chamber valve allows the composition into the mixing
chamber, yet resists the flow of the composition from the mixing chamber
30 through the chamber valve .

101. The toy gun of claim 99 wherein the means for forcibly ejecting
the composition comprises:





-200-

a barrel being collapsible towards the body; and

a chamber valve disposed within the mixing chamber and allowing the entrance of composition into the mixing chamber, wherein when the barrel is collapsed towards the body, the chamber valve prevents the composition from
5 exiting the mixing chamber through the chamber valve.

102. The toy gun of claim 101, wherein the cartridge further comprises:


a cartridge body having a plurality of ribs oriented on the body;

a first cylinder and a second cylinder disposed within the cartridge body
10 and retained in place by the ribs;

a first piston and a second piston, the first piston disposed within the first cylinder and the second piston disposed with the second cylinder, each piston having a chamber for retaining a quantity of the bioluminescence generating reagents; and

15 a plunger attached to the first piston and second piston wherein advancing the plunger into the cartridge body urges the first piston through the first cylinder and the second piston through the second cylinder to eject the quantity of bioluminescence generating reagents from the first piston and the second piston.



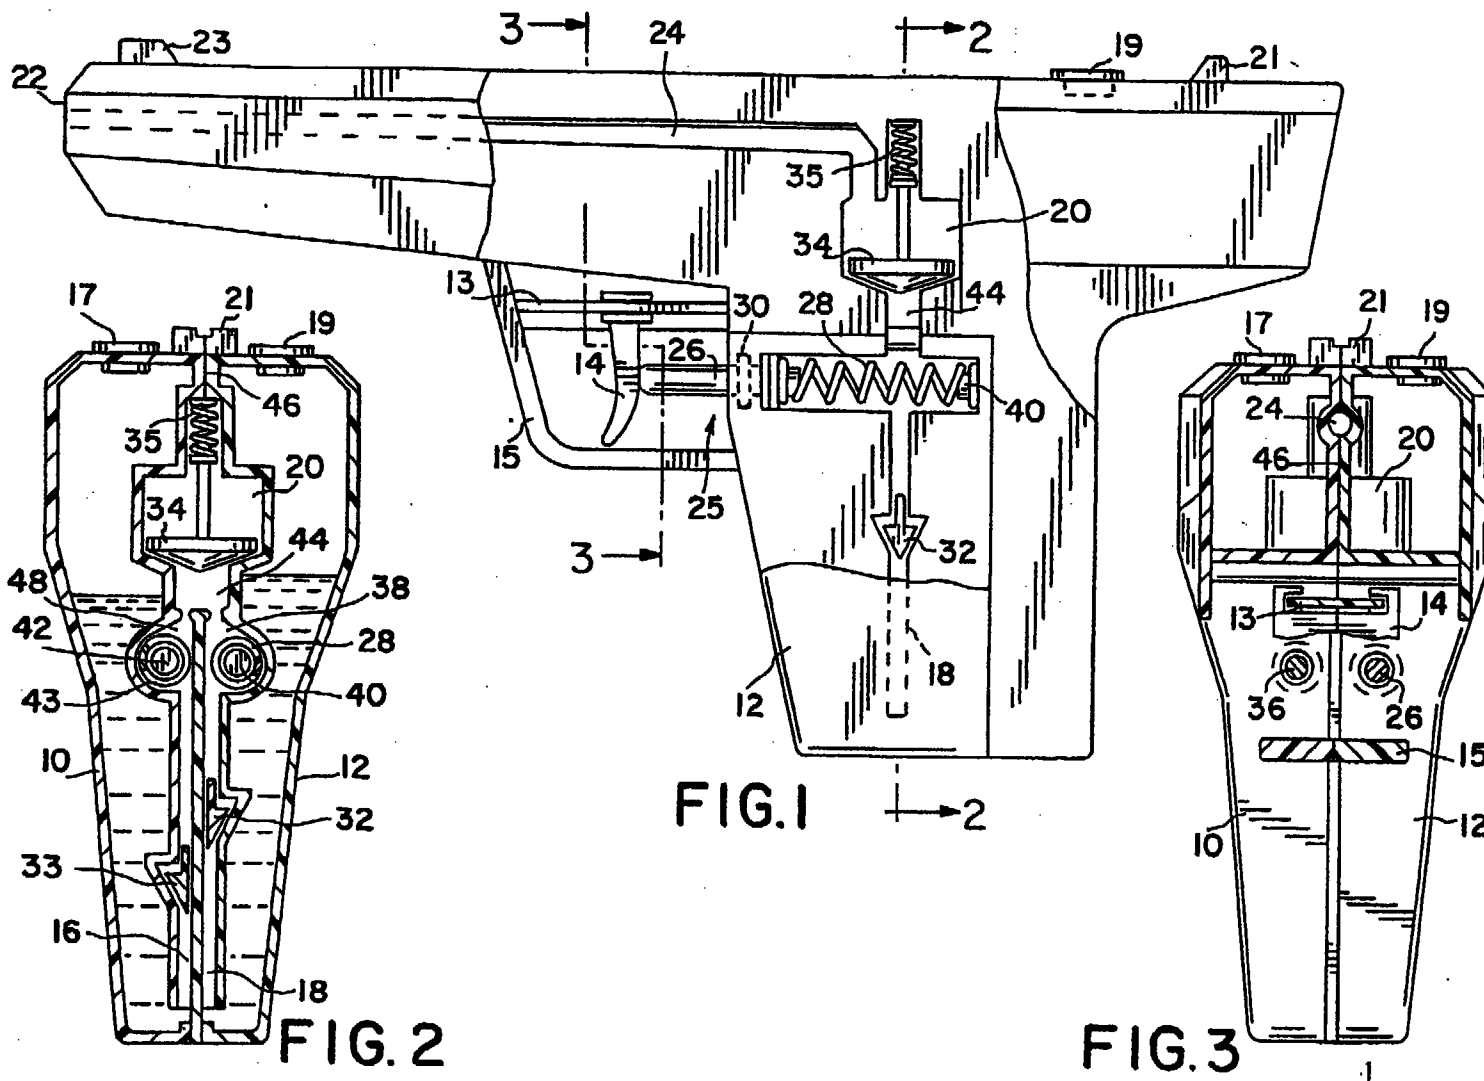

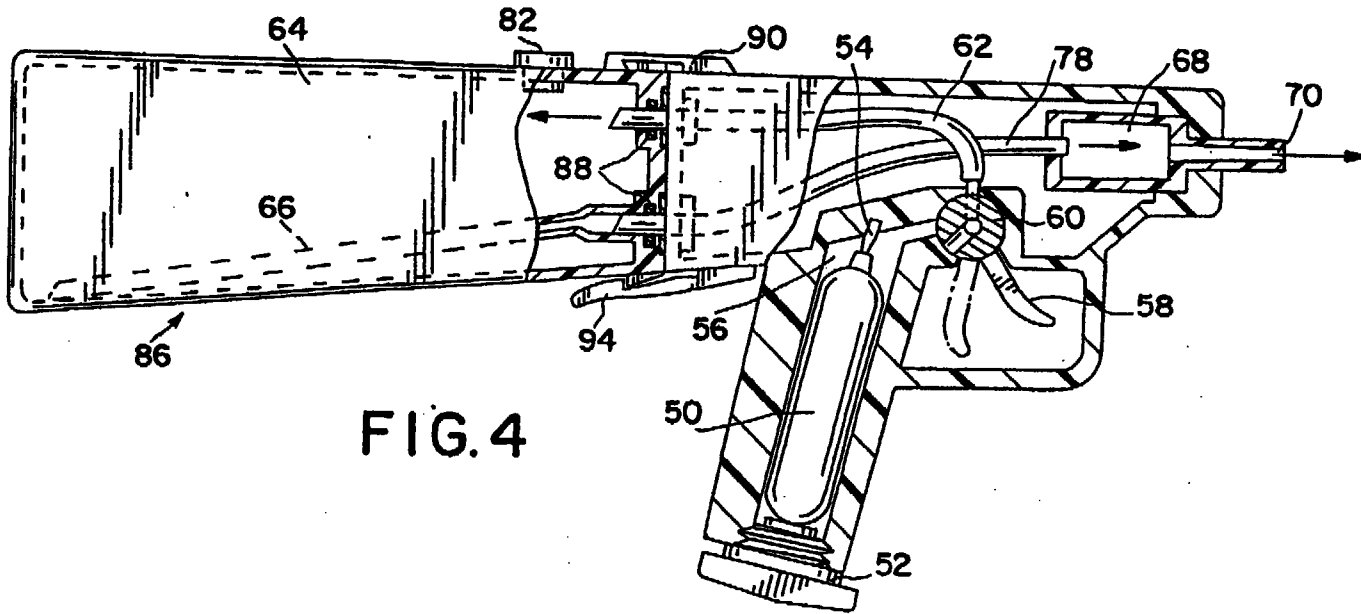


FIG. 4

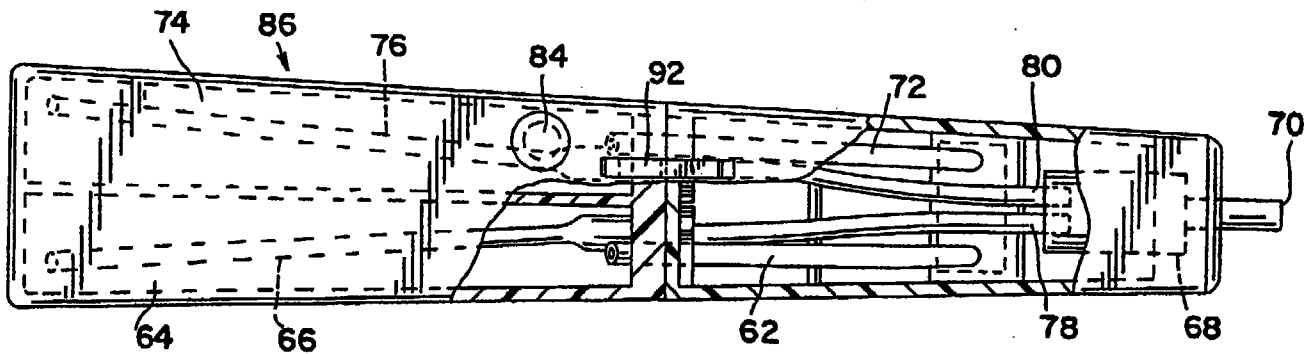
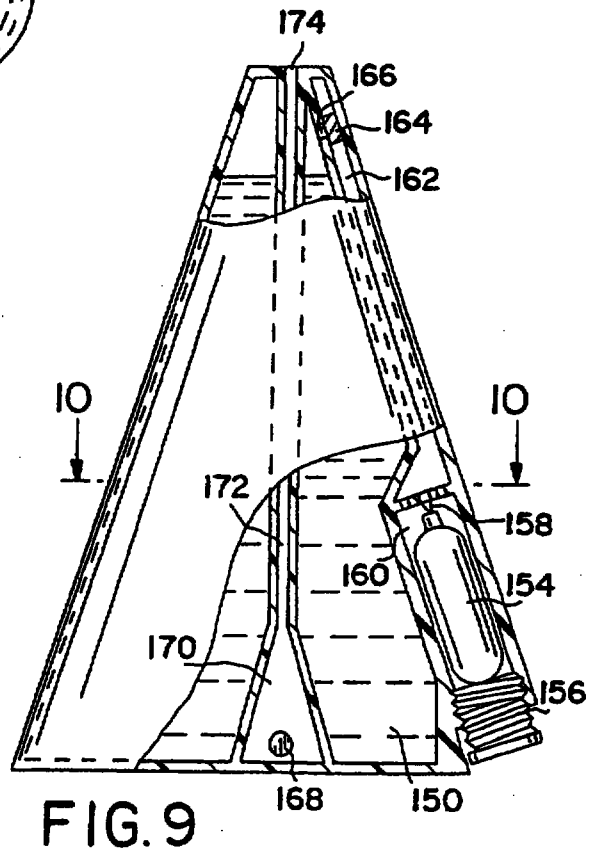
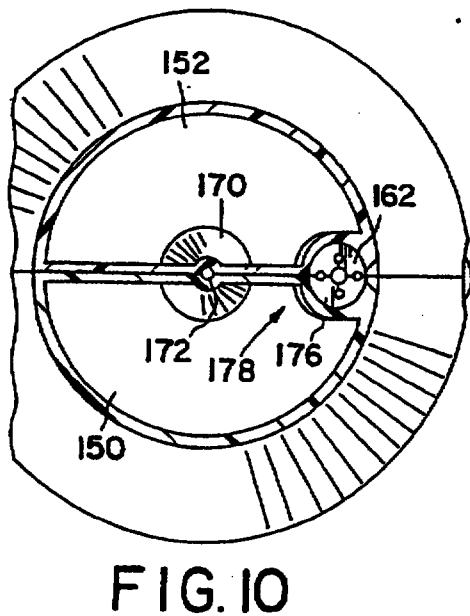
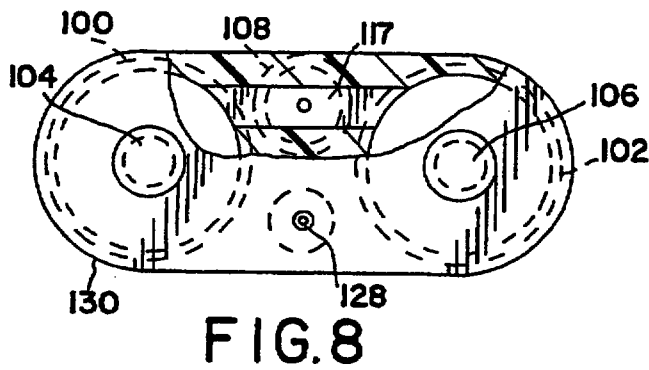
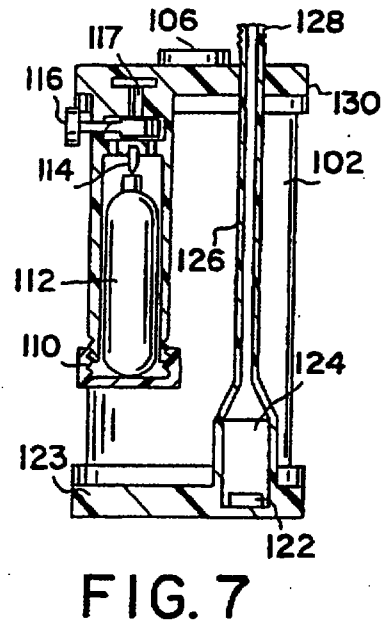
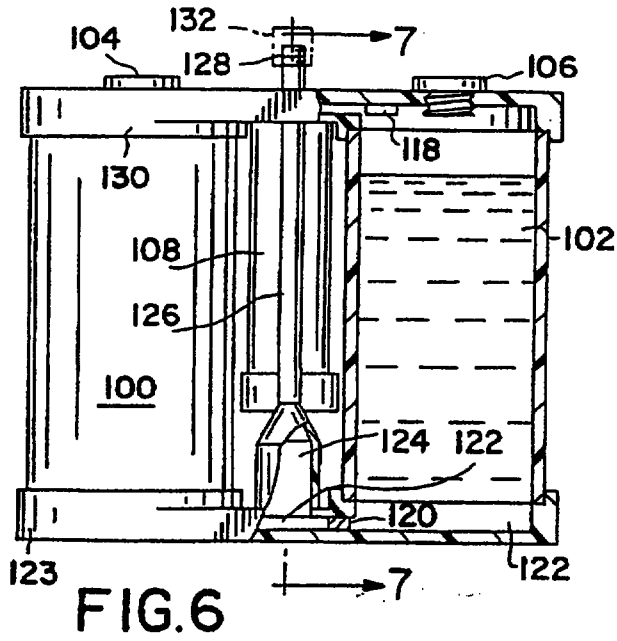


FIG. 5



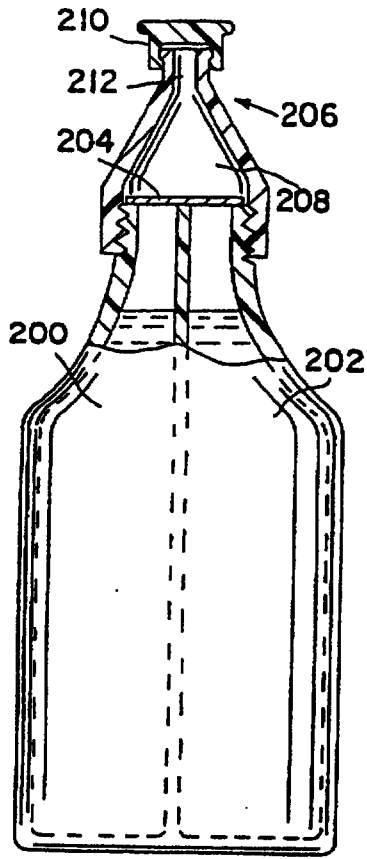


FIG. 11

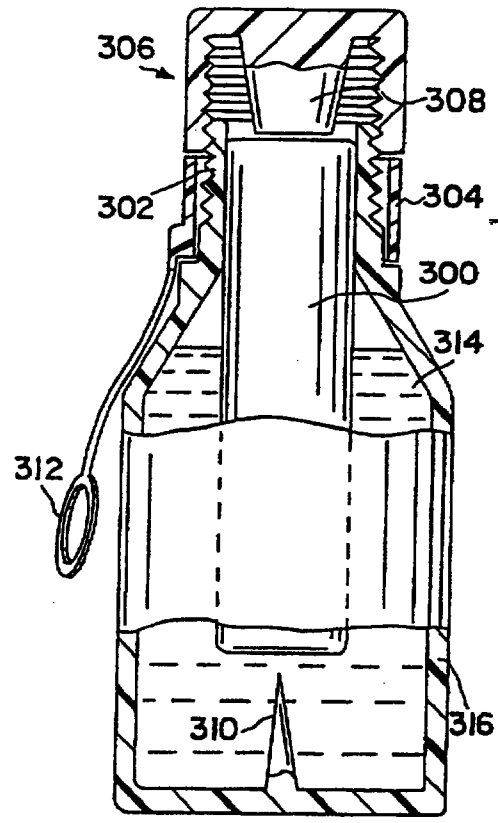


FIG. 12

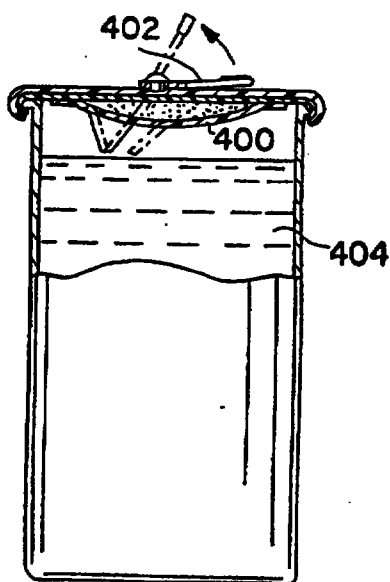


FIG. 14

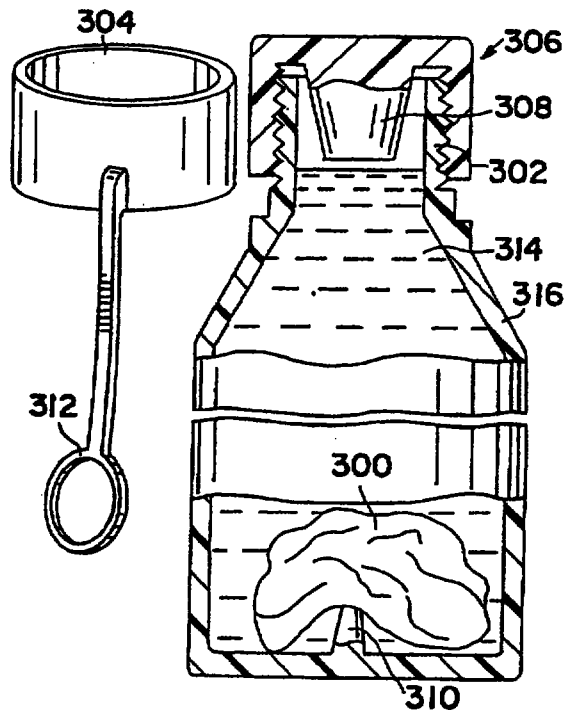


FIG. 13

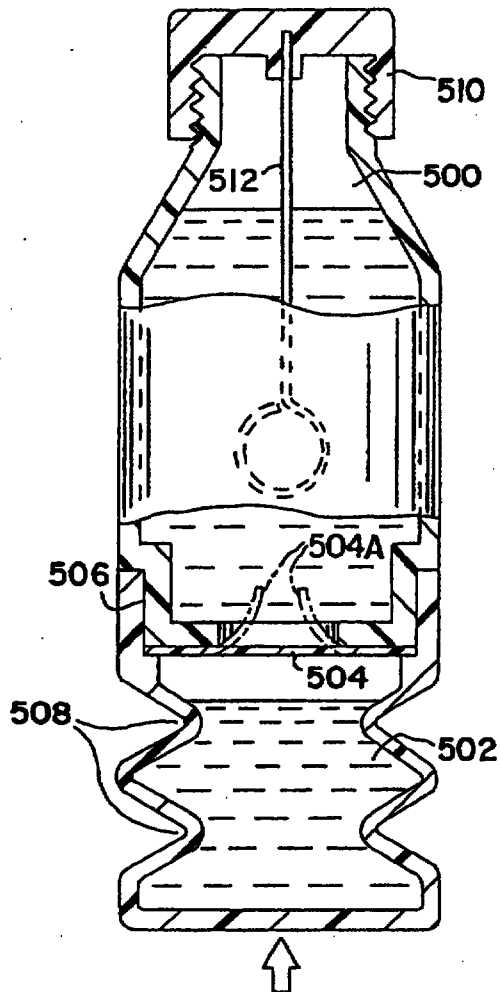


FIG. 15

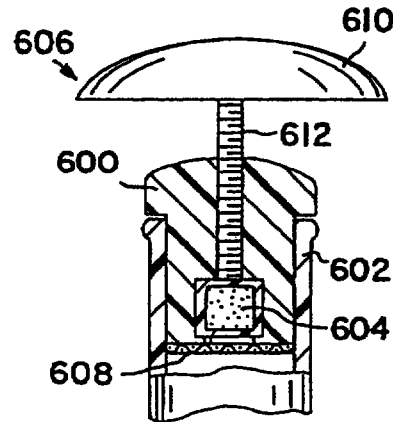


FIG. 16

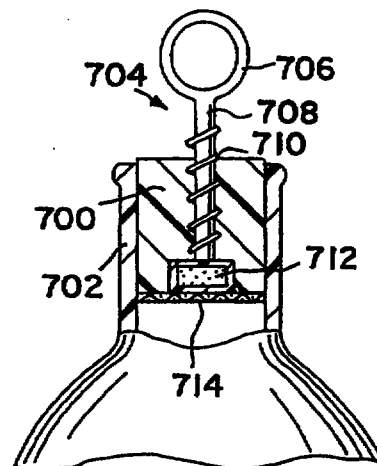


FIG. 17

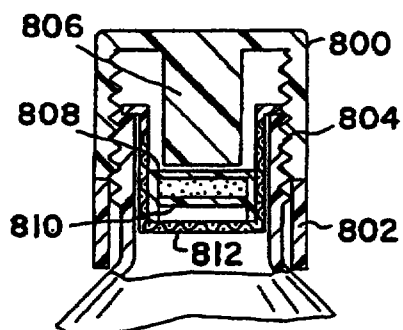


FIG. 18

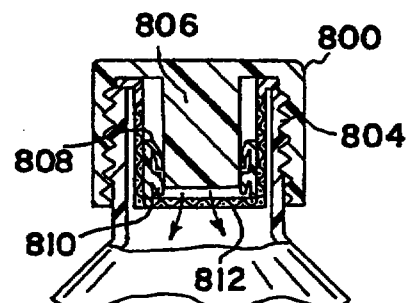


FIG. 19

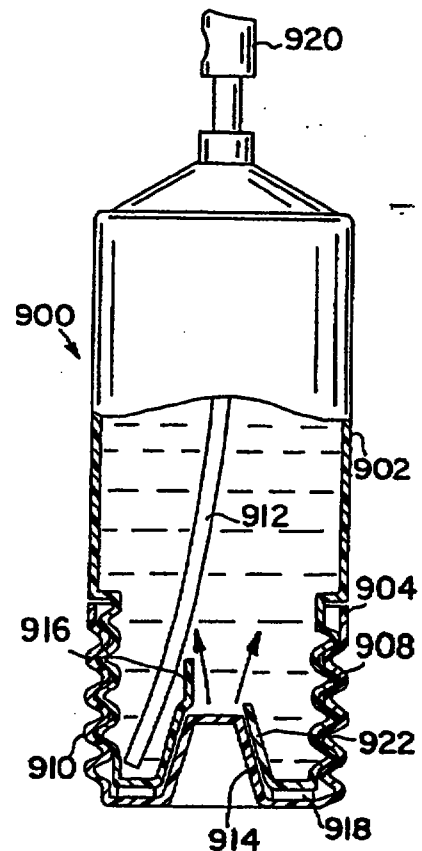
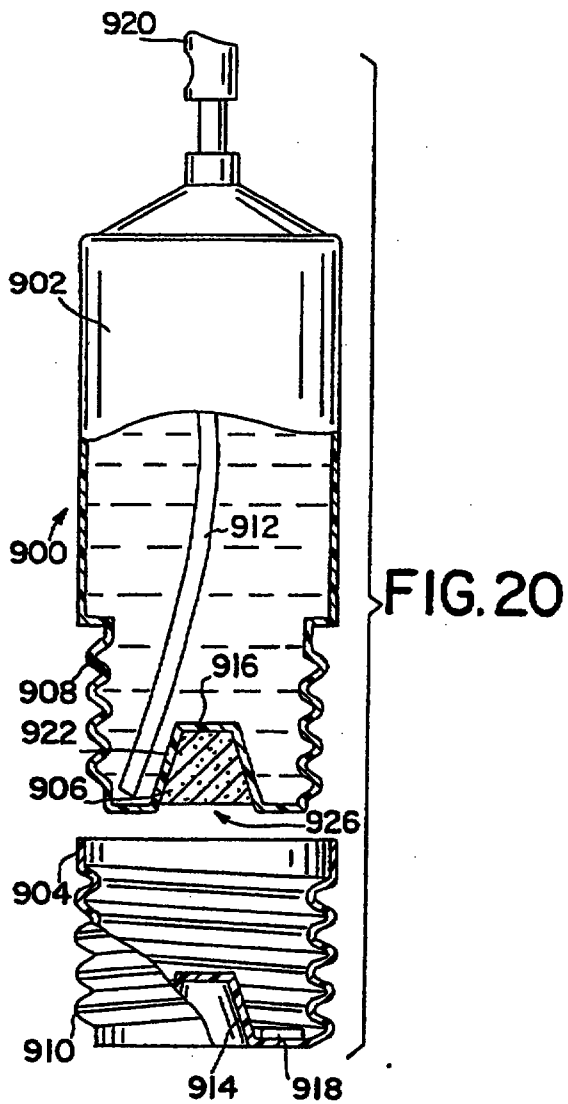


FIG. 21



FIG. 22

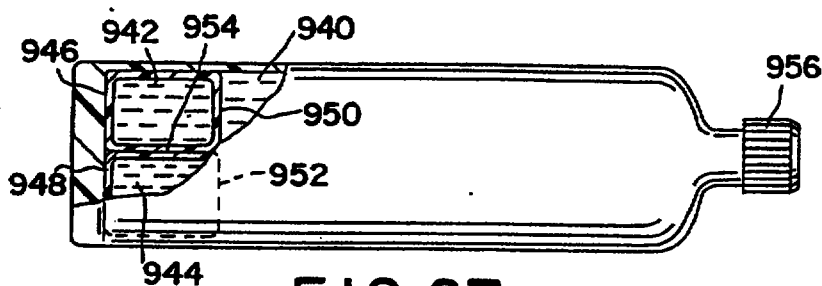


FIG. 27

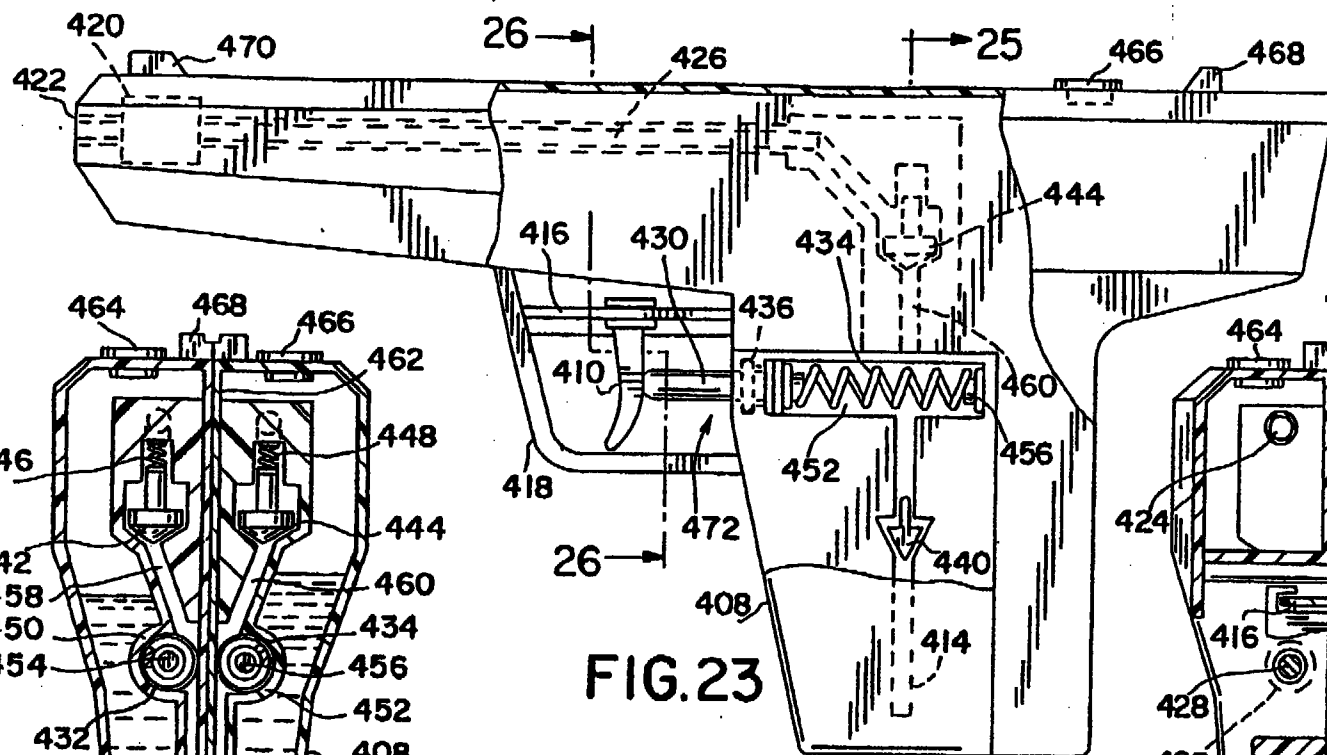


FIG. 23

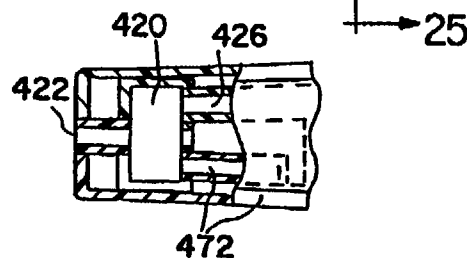


FIG. 24

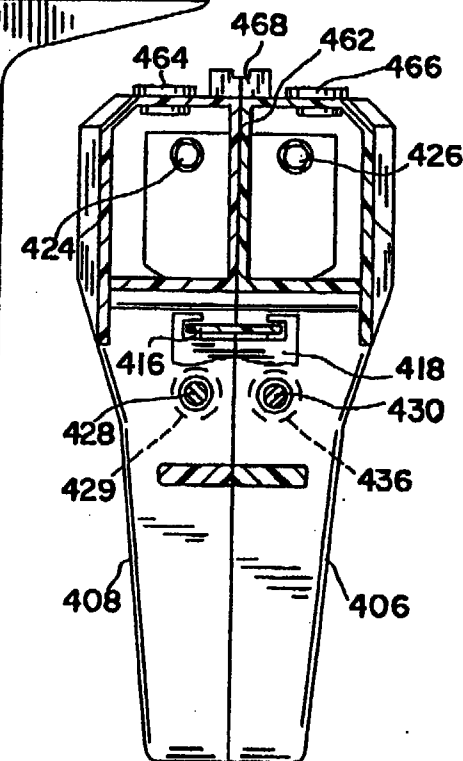


FIG. 26

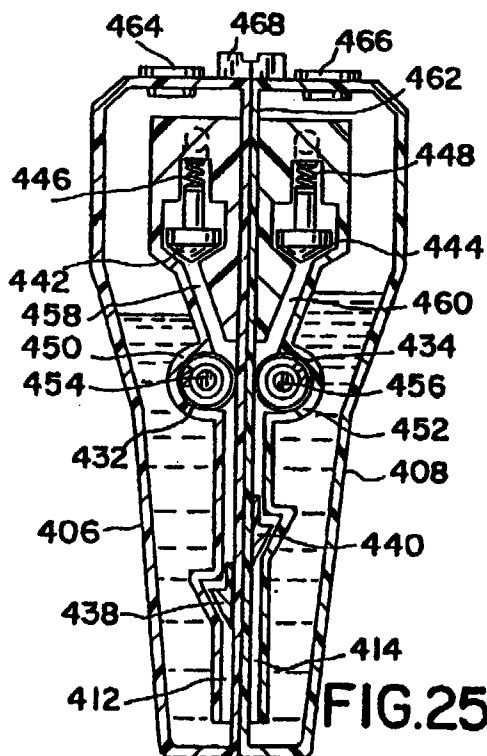


FIG. 25

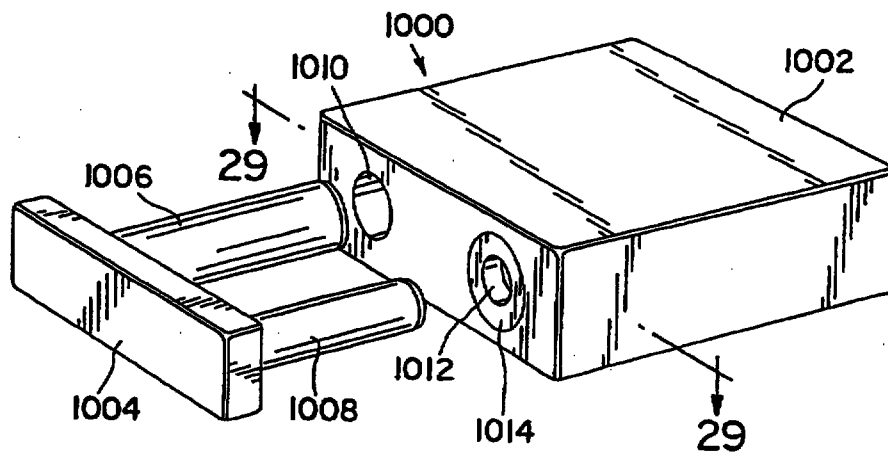


FIG. 28

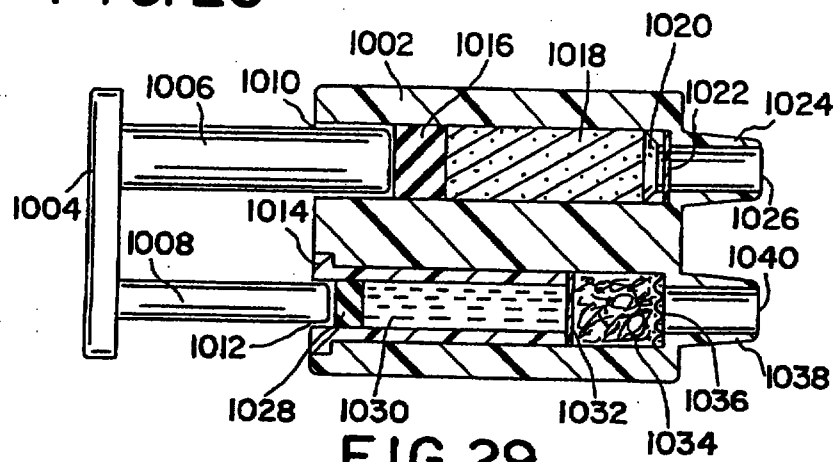


FIG. 29

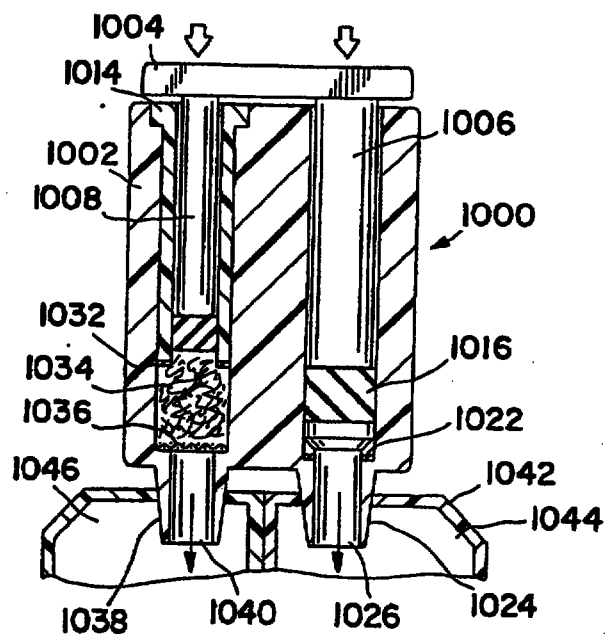


FIG. 30

9/13

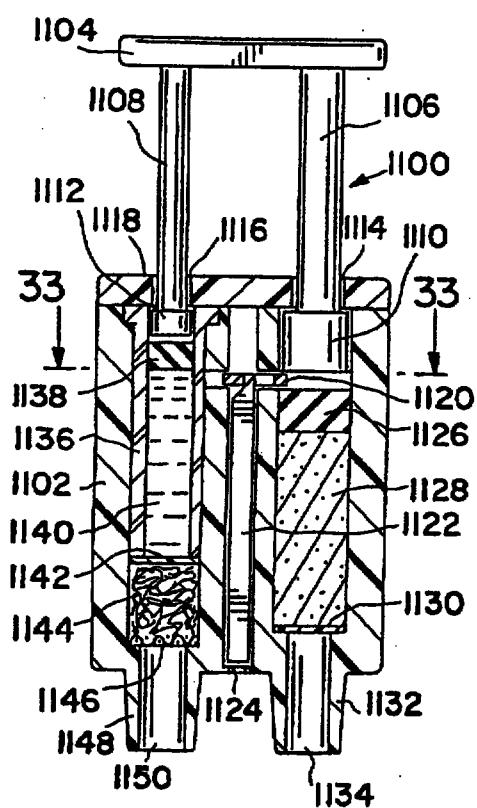


FIG. 31

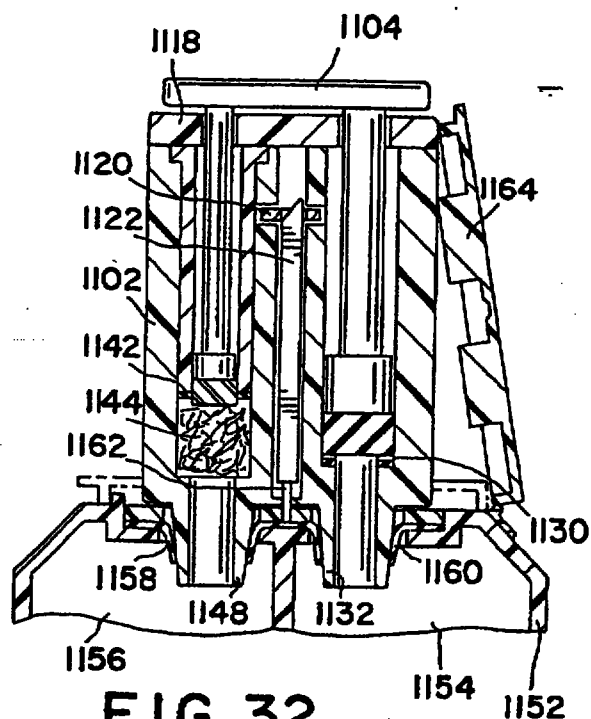


FIG. 32

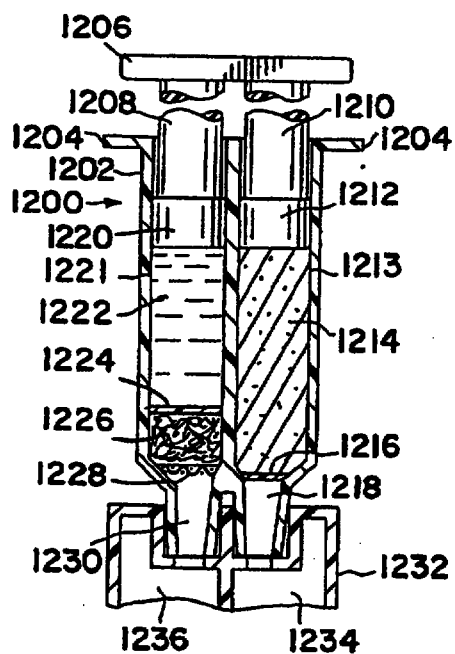


FIG. 34




FIG. 33

10/13

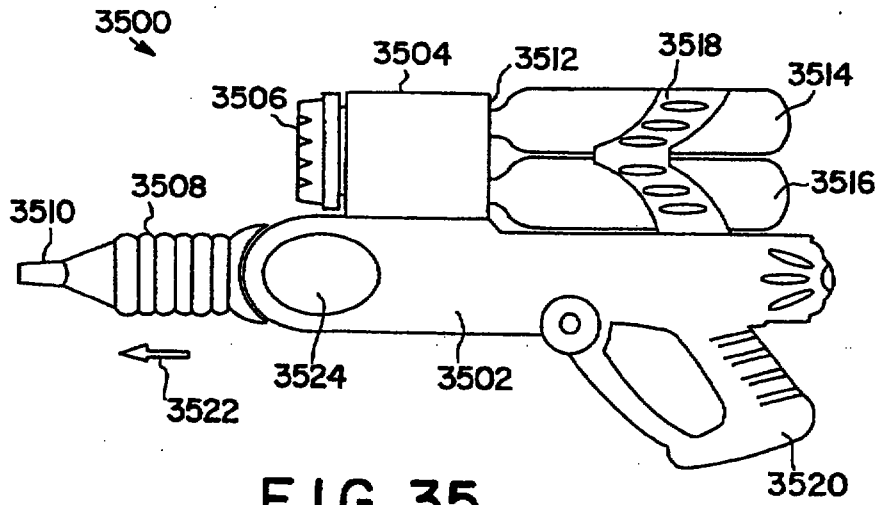


FIG. 35

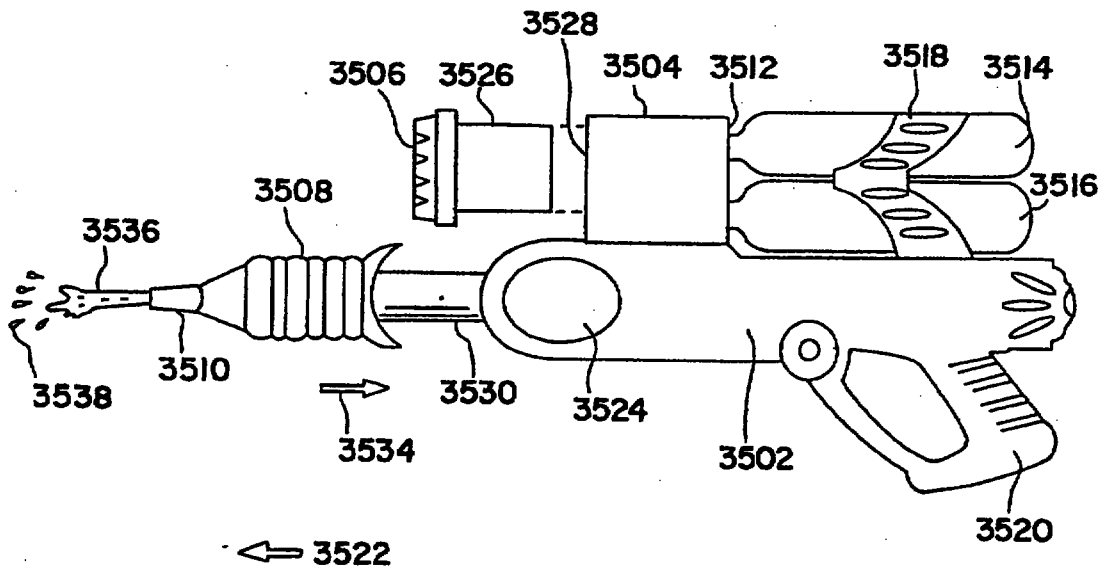


FIG. 36

11/13

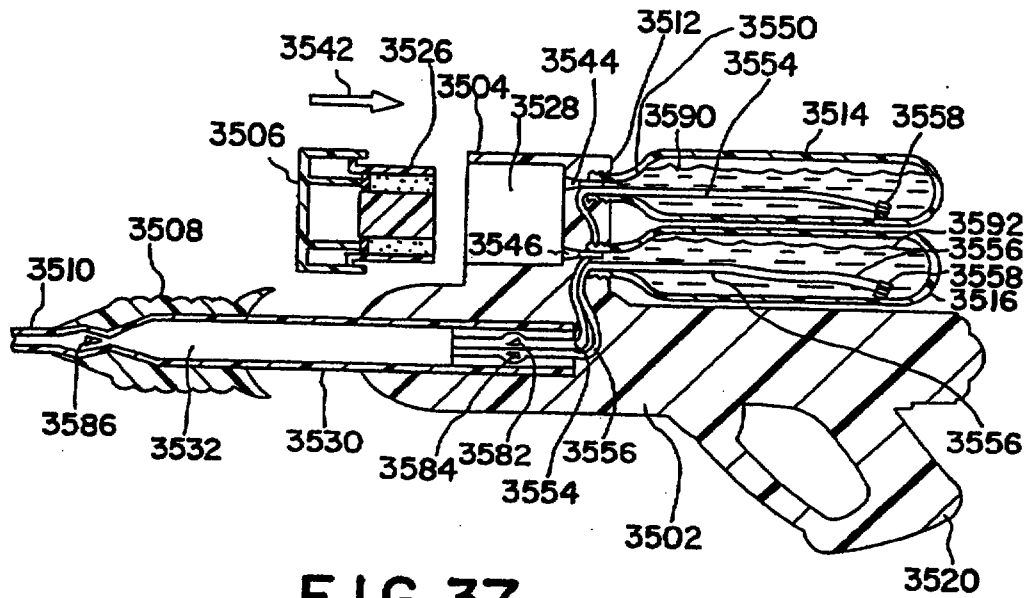


FIG. 37







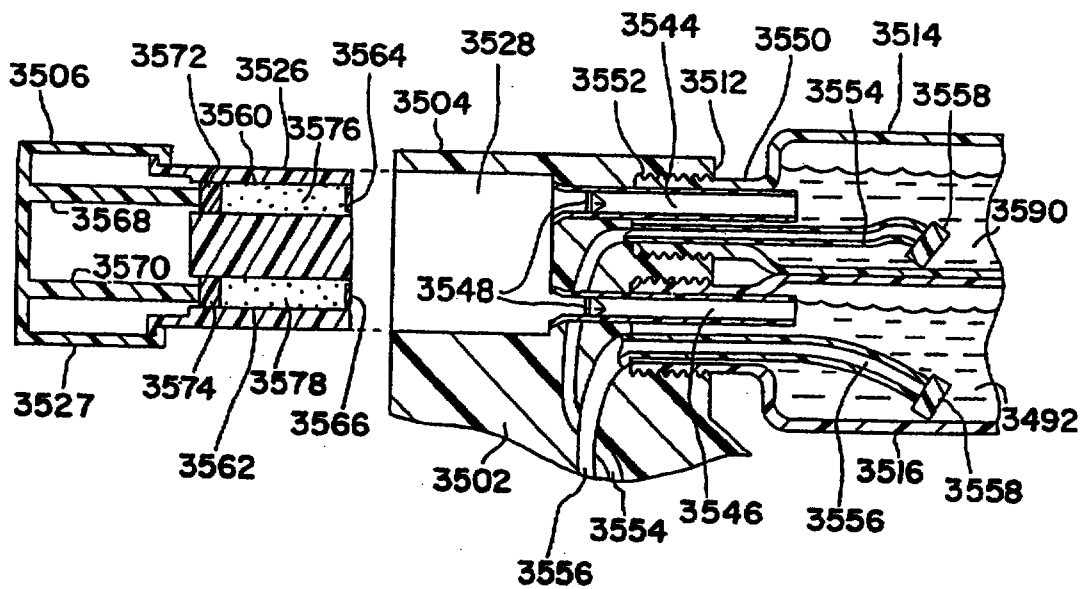


FIG. 38

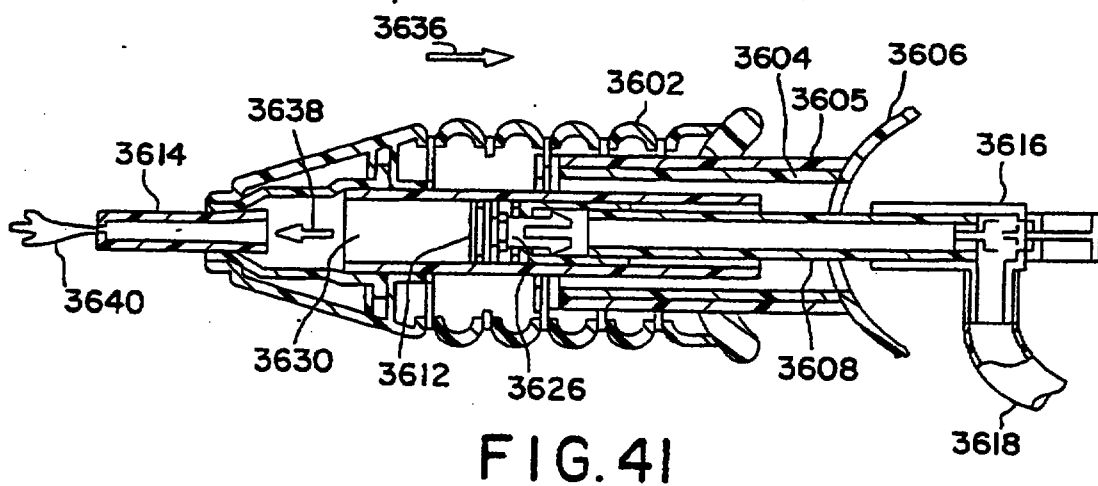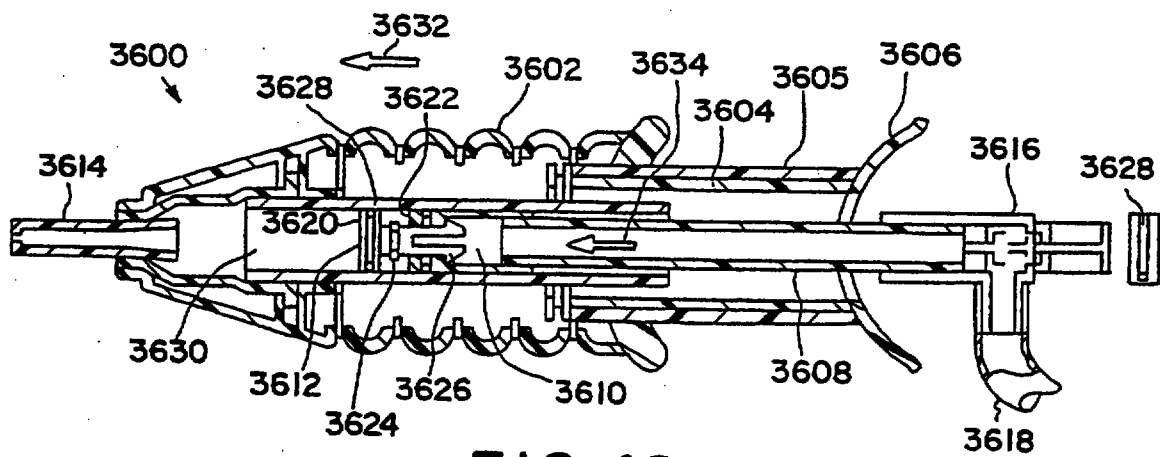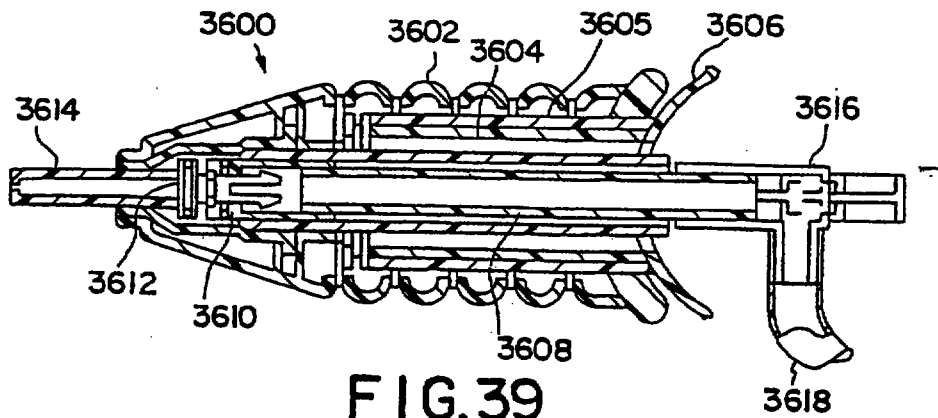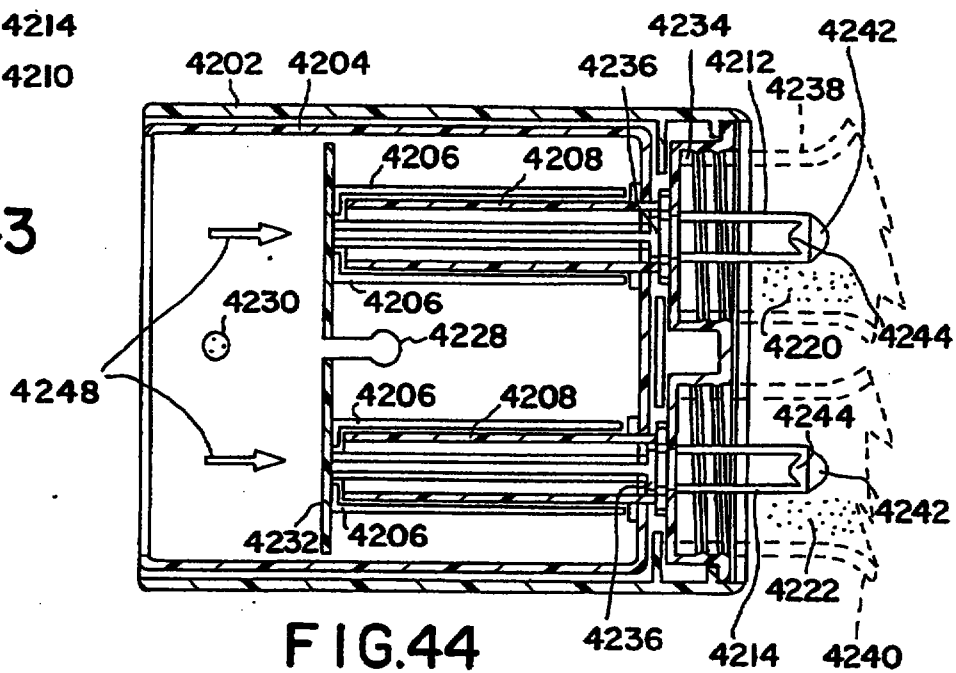

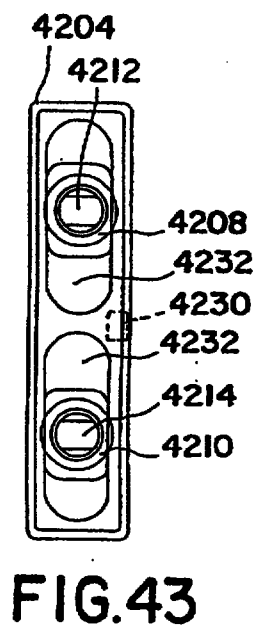

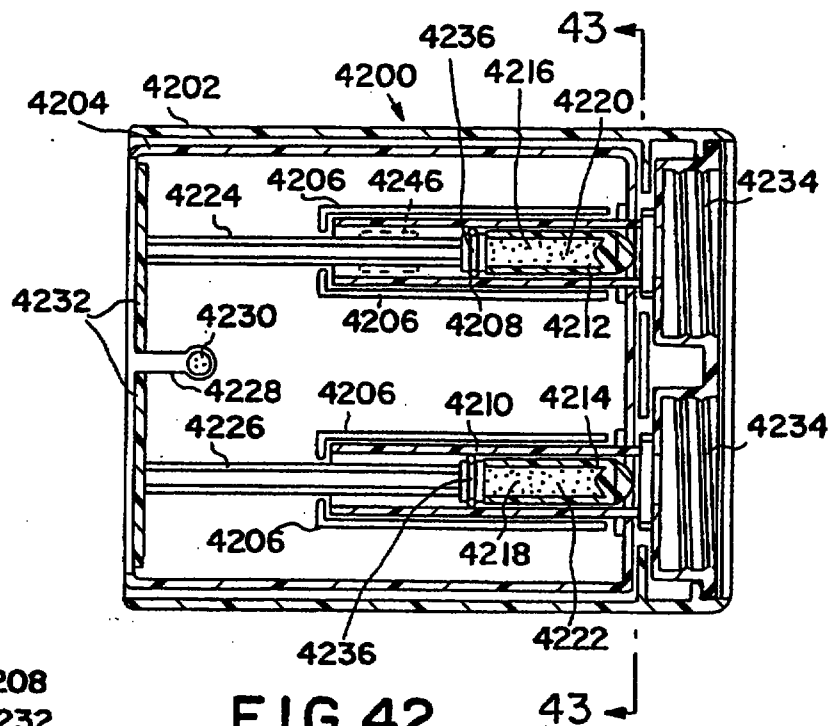

REPLACED SHEETS		SG
☐ Description	to page	
☐ Claim	to page	200
☐ Drawing	to page	
☐ All	to page	
DATE OF RECEIPT		

CLAIMS:

1. A combination, comprising:
 - a) an article of manufacture selected from among toys, decorative lanterns, fountains, personal care items, fairy dust, beverages, soft drinks, foods, textile products, bubbles, balloons, personal items, dentifrices, soaps, body paints, and bubble bath, novelty inks and paper products; and
 - b) one or more components of a bioluminescence generating system, whereby the combination is a novelty item.
2. The combination of claim 1, wherein the article of manufacture is selected from among toy guns, pellet guns, greeting cards, fingerpaints, foot bags, slimy play material, clothing, bubble making toys, cosmetics, bath powders, body lotions, gels, body powders, body creams, toothpastes, mouthwashes, soaps, body paints, bubble bath, board game toys, toy eggs, toy cigarettes, dolls, sparklers, magic wand toys, inks, wrapping paper, gelatins, icings, frostings, fairy dust, beer, wine, champagne, soft drinks, ice cubes, ice, dry ice and fountains.
3. The combination of claim 1 or claim 2 that is a toy gun.
4. The combination of claim 3, wherein the toy gun comprises two chambers in which one chamber contains a composition comprising up to all except one component of a bioluminescence generating system, and the other chamber contains a composition comprising the remaining component(s).
6. The combination of claim 1 or claim 2 that is a beverage.
7. The combination of claim 1 or claim 2 that is a fountain.
8. The combination of claim 1 or claim 2 that produces water fireworks.
9. The combination of claim 1 or claim 2 that is a glowing card.
10. The combination of claim 1 or claim 2 that is a bubble making toy.





- 188 -

11. The combination of claim 1 or claim 2, further comprising means for delivering the remaining components of the bioluminescence generating system, whereby upon delivery the
5 resulting novelty item glows.

12. The combination of claim 11, wherein the delivering means is selected from among a wand, a sponge, a spray bottle, an eyedropper, cotton and a textile.

13. The combination of claim 1 or claim 2, wherein the
10 article of manufacture is an egg-shaped toy that comprises the bioluminescence generating system.

14. The combination of claim 1 or claim 2, wherein the article of manufacture is a footbag that comprises the bioluminescence generating system.

15 15. The combination of claim 1 or claim 2 that is a beverage comprising one or more components of a bioluminescence generating system.

16. The combination of claim 15, wherein the beverage is selected from among beer, wine, champagne, and soft drinks.

20 17. The combination of claim 1 or claim 2 that is ice, comprising one or more components of a bioluminescence generating system.

18. The combination of claim 17 that is dry ice.

25 19. The combination of claim 1 or claim 2, wherein the component(s) is encapsulated in a vacuole or an endosome.

20. The combination of claim 1 or claim 2, wherein the article of manufacture comprises a single chamber apparatus that contains components of the bioluminescence generating system.

30 21. The combination of claim 20, further comprising, in the chamber, a pellet containing one or more or the remaining bioluminescence-generating components.

22. The combination of claim 20 or 21 that is a toy gun.


23. A combination, comprising:
an article of manufacture; and a fluorescent protein,
35 whereby the combination is a novelty item.

24. The combination of claim 23, wherein the article of manufacture is food.

25. The combination of claim 24, wherein the food is a beverage.



AMENDED SHEET



- 189 -

26. The combination of claim 23, wherein the article of manufacture is a toy.

27. The combination of claim 26, wherein the toy is a bubble-toy.

28. The combination of claim 25, wherein the beverage is a soft drink.

29. The combination of any of claims 23-28, further comprising one or more components of a bioluminescence generating system.

30. The combination of claim 25, wherein the beverage is an alcoholic beverage.

31. The combination of any of claims 23-30, wherein the fluorescent protein is encapsulated in a time-release vehicle.

32. The combination of any of claims 23-31, wherein the fluorescent protein is selected from green fluorescent protein, blue fluorescent protein and phycobiliprotein.

33. The combination of any of claims 3, 4 or 22 that is a toy gun, comprising:

a cartridge having at least one chamber for receiving the bioluminescence generating reagents;

a body having a handle and a cartridge receptacle for receiving the cartridge;

at least one container attachable to the cartridge receptacle for storing a quantity of fluid; and

a means for injecting the contents of the cartridge into the container whereby the contents of the chamber mix with the fluid to form a composition containing bioluminescence generating reagents.

34. The combination of claim 33, wherein the gun further comprises:

a barrel having a mixing chamber in fluid communication with the container, the barrel having a nozzle in fluid communication with the mixing chamber;

a means for drawing the composition containing the bioluminescence generating reagents into the mixing chamber; and

a means for forcibly ejecting the composition within the mixing chamber from the mixing chamber and out through the nozzle.



* C L M S *

AMENDED SHEET



- 190 -

35. The combination of claim 34, wherein the means for drawing the composition comprises:

the barrel being extendable from the body; and

5 a chamber valve disposed within the mixing chamber so that when the barrel is extended, the chamber valve allows the composition into the mixing chamber, yet resists the flow of the composition from the mixing chamber through the chamber valve .

10 36. The combination of claim 35, wherein the means for forcibly ejecting the composition comprises:

a barrel being collapsible towards the body; and

a chamber valve disposed within the mixing chamber and allowing the entrance of composition into the mixing chamber, wherein when the barrel is collapsed towards the body, the
15 chamber valve prevents the composition from exiting the mixing chamber through the chamber valve.

37. The combination of claim 36, wherein the cartridge further comprises:

20 a cartridge body having a plurality of ribs oriented on the body;

a first cylinder and a second cylinder disposed within the cartridge body and retained in place by the ribs;

a first piston and a second piston, the first piston disposed within the first cylinder and the second piston disposed
25 with the second cylinder, each piston having a chamber for retaining a quantity of the bioluminescence generating reagents; and

a plunger attached to the first piston and second piston wherein advancing the plunger into the cartridge body urges the
30 first piston through the first cylinder and the second piston through the second cylinder to eject the quantity of bioluminescence generating reagents from the first piston and the second piston.

38. The combination of claims 1-22, 29 and 32-37, wherein
35 the component of the bioluminescence generating system in the combination comprises a luciferase.

39. The combination of claim 1 or claim 2, wherein the article of manufacture is a toy cigarette or cigarette-shaped.

40 40. The combination of claim 39, wherein the article of manufacture is a toy cigarette, comprising:

SECRET



* C L M S *



- 191 -

a) a tubular delivery vehicle;
b) filters covering each end of the tubular delivery vehicle; and

5 c) particles comprising bioluminescence generating system components in the tubular delivery vehicle, wherein the particles are smaller than the pores of the filters.

41. The combination of claims 1-22, 29 and 32-40, wherein a component of the bioluminescence generating system in the
10 combination comprises a luciferin.

42. The combination of any of claims 1-22, 29, and 32-41, wherein the bioluminescence generating system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system, a crustacea system,
15 a fish system, an annelid system, and an earthworm system.

43. The combination of any of claims 1-22, 29, and 32-42, wherein the system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Aristostomias*, *Odontosyllis*, *Oplophorus*, firefly, glow worm and bacterial systems.

20 44. The combination of any of claims 1-22, 29, and 32-43, comprising all components of the system except the activator that is required to initiate bioluminescence.

45. The combination of any of claims 1-22, 29, and 32-43, comprising one or more of a luciferase, luciferin and activator.

25 46. A method of producing a glowing beverage, comprising: adding the components of a bioluminescence generating system to a beverage, whereby the beverage glows.


47. The method of claim 46, further comprising adding a fluorescent protein.

30 48. The method of claim 46 or claim 47, wherein the bioluminescence generating system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system, a crustacea system, a fish system, an annelid system, and an earthworm system.

35 49. The method of claim 47 or claim 48, wherein the fluorescent protein is encapsulated in a time-release vehicle.

50. The method of any of claims 46-49, wherein the bioluminescence generating system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Aristostomias*, *Odontosyllis*, *Oplophorus*, firefly, glow worm and bacterial systems.
40





- 192 -

51. A kit comprising: the toy gun as defined in any of claims 3, 4, 22, and 33-36; and a loading or charging cartridge comprising one or more components of a bioluminescence generating system.

52. A cartridge for loading a novelty item with components of a bioluminescence generating system, comprising:

a body comprising a chamber with an exit for delivering contents of the chamber;

10 a matrix material in the chamber; and

a plunger in the chamber, wherein the plunger comprises a piston that is adapted to deliver a material linked to the matrix through the exit.

53. The cartridge of claim 52, further comprising a bioluminescence generating reagent linked to the matrix material.

54. The cartridge of claim 53, wherein the reagent is a luciferin or luciferase.

55. The cartridge of any of claims 52-54 that is adapted to deliver any contents into an article of manufacture selected from toy guns, pellet guns, bubble making toys, beverage containers, and toothpaste containers.

56. The cartridge of claim 52, that is adapted to deliver its contents to the combination of claim 1.

57. The cartridge of claim 53, comprising:

25 a body comprising two chambers each having an exit;

a plunger means comprising a first piston aligned with the first chamber, and a second piston aligned with the second chamber;

whereby urging the plunger towards the body causes the first piston to pressurize the first chamber thereby forcing the contents of the first chamber out the exit of the first chamber, and causes the second piston to pressurize the second chamber thereby forcing the contents of the second chamber out the exit of the second chamber; and

35 a matrix material positioned within at least one of the chambers;

wherein the pressurization of the chamber containing the matrix material forces any contents within this chamber through the matrix material, whereby material linked to the matrix is flushed out of the exit.





58. The cartridge of claim 57, further comprising a matrix material in at least one of the chambers, wherein one or more of the reagents of a bioluminescence generating system are linked to
5 a matrix material.

59. The cartridge of claim 53 or claim 58, wherein the bioluminescence generating system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system, a crustacea system, a fish
10 system, an annelid system, and an earthworm system.

60. The cartridge of claim 59, wherein the bioluminescence generating system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Odontosyllis*, *Aristostomias*, *Oplophorus*, firefly, and bacterial systems.

15 61. The cartridge of any of claims 52-60, further comprising a locking device that prevents compression of the plunger.

62. A method of recharging a bioluminescent novelty item having at least one filler port, comprising the steps of:

20 positioning a dispensing cartridge of any of claims 52-61 adjacent to a filler port(s) of a novelty item, the dispensing cartridge containing a matrix material comprising a bioluminescence generating reagent and having a means for dispensing the reagent from the dispensing cartridge; and

25 operating the dispensing means to dispense the reagent from the dispensing cartridge through the filler ports and into the novelty item.

63. The method of claim 62, wherein the novelty item is a toy gun.

30 64. A combination, comprising:

a dual chamber container; and

one or more components of a bioluminescence generating system in one chamber, and the remaining components in the other chamber.

35 65. An article of clothing comprising a matrix material and a component of a bioluminescence generating system linked to the material, whereby the article is a novelty item and wherein the matrix material is selected from among cotton, polyester, polyester-cotton blends, polypropylene, polyvinyltoluene,
40 polyvinyl propylene, celluloses, cellulose derivatives, acrylic





- 194 -

resins, glass, silicon, ceramics, silica gels, polystyrene, gelatins, polyacrylates, polyvinyl pyrrolidone, co-polymers of vinyl, polyacrylamides, latex gels, dextran, rubber, silicon,
5 plastics, nitrocellulose, celluloses, natural sponges, synthetic sponges and porous glass.

66. A fluid dispensing apparatus, comprising:

- a) two chambers, each having an upper end and a lower end;
- 10 b) a gas chamber in communication with the upper end of the two chambers and adapted to receive a canister of pressurized gas;
- c) a mixing chamber in communication with the lower end of the chambers; and
- 15 d) a nozzle operatively attached to the mixing chamber.

67. The fluid dispensing apparatus of claim 66, further comprising removable separation means situated between the two chambers and the mixing chamber, selected from among blow-out
20 plugs, one-way valves and pneumatic valves.

68. The apparatus of claim 66 or claim 67, containing a composition comprising one or more components of a bioluminescence generating system.

69. A compressible dispensing apparatus, comprising:

- 25 a) a compressible housing having a dispensing end;
- b) two chambers within the housing, each in fluid communication with the dispensing end of the housing and each containing a mixture;
- c) a cap apparatus adapted to removably attach to the
30 dispensing end of the housing and having a mixing chamber and top cap, wherein the top cap is situated distal to the dispensing end of the housing; and
- d) a membrane seal situated between the dispensing end of the housing and the cap apparatus.

35 70. A container apparatus, comprising:

- a) a container having a top end, a neck and a bottom end;
- b) a piercing needle located at the bottom end of the bottle;





- 195 -

c) a bladder situated, non-permanently, within the neck of the container;

5 d) a cap having a plunger operatively attached to its inside surface, wherein the cap is adapted to removably attach to the top end of the container including along a portion of the neck of the container; and

e) a collar adapted to removably encircle the exterior of the neck of the container such that the cap can be
10 securely attached to the top of the container when the collar is in place and can be securely attached to the top and along the neck of the bottle when the collar is removed.

71. A combination, comprising:

the apparatus of claim 70; and
15 one or more components of a bioluminescence generating system.

72. A volcano-shaped fluid dispensing apparatus, comprising:

a) a first half-conical chamber having a first
20 interior edge and a top end which is smaller than its bottom end;

b) a second half-conical chamber having a second interior edge and a top end which is smaller than its bottom end, wherein the second chamber is attached, along its second interior edge to the first chamber along its first interior edge;

25 c) a gas chamber defined by the first interior edge of the first chamber and by the second interior edge of the second chamber and which is adapted to receive a canister of pressurized gas;

d) a gas conduit in communication with the gas
30 chamber and each of the chambers, which gas conduit is defined by the first interior edge of the first chamber and the second interior edge of the second chamber;

e) a mixing chamber in communication with each of the chambers at the bottom end of the chambers, the mixing chamber is
35 defined by the first interior edge of the first chamber and the second interior edge of the second chamber; and

f) a nozzle in attached to the mixing chamber and extending from the mixing chamber to the top end of the chambers, wherein the nozzle is defined by the first interior edge of the
40 first chamber and the second interior edge of the second chamber.





- 196 -

73. The volcano-shaped fluid dispensing apparatus of claim 72, further comprising:

5 g) removable separation means situated between the gas conduit and each of the chambers, and selected from among blow-out plugs, one-way valves and pneumatic valves; and

h) removable separation means situated between each of the chambers and the mixing chamber, and selected from among blow-out plugs, one-way valves and pneumatic valves.

10 74. A combination, comprising:

the apparatus of claim 73; and

one or more components of a bioluminescence generating system.

75. A fluid dispensing apparatus, comprising:

15 a) two chambers, each having an upper end and a lower end and each having a gas inlet in the upper end and a fluid outlet in the lower end;

20 b) a gas chamber adapted to receive a canister of pressurized gas, situated between the chambers and having a top end, a gas outlet within the top end and a base end;

c) an upper support operatively attached across the upper ends of the chambers and the top end of the gas chamber;

25 d) two gas conduits, contained within the upper support and each operatively attached to the gas outlet of the gas chamber and operatively attached to a different of the gas inlets of the chambers;

e) a gas control valve operatively attached to the gas chamber, such that the flow of gas from the gas chamber into the gas conduits is regulable;

30 f) a mixing chamber having a bottom inlet and top outlet, and situated between the chambers;

g) a base support operatively attached across the lower ends of the chambers and the bottom inlet of the mixing chamber;

35 h) two fluid ports contained within the base support, each of the fluid ports is operatively attached to the bottom inlet of the mixing chamber and operatively attached to the lower end of the chambers;





- 197 -

i) two removable separation means, each situated within the fluid ports between the chambers and the mixing chamber and each, independently selected from among blow-out
5 plugs, one-way valves and pneumatic valves; and

j) a nozzle operatively attached to the mixing chamber and extending through the upper support.

76. A combination, comprising:

the apparatus of claim 75; and

10 one or more components of a bioluminescence generating system.

77. A combination, comprising:

a fluid dispensing apparatus that comprises:

a) a first chamber;

15 b) a second collapsible chamber, attached to the bottom end of and in communication with the first chamber; and

c) a removable separation means between the first chamber and the second chamber.; and

20 one or more components of a bioluminescence generating system.

78. The fluid-containing apparatus of claim 77, comprising:

a) a first chamber having a bottom opening;

25 b) a second chamber having a top opening in communication with the bottom opening of the first chamber and is operatively attached to the bottom end of the first chamber and adapted to collapse against the first chamber; and

c) a rupturable membrane situated between the bottom opening of the first chamber and the top opening of the second chamber.

30 79. The apparatus of claim 77, further comprising a cap, attached to the top end of the first chamber, having a bubble-blowing wand integral thereto and situated within the apparatus.

80. A combination, comprising:

35 the fluid dispensing apparatus of any of claims 77-79; and

one or more components of a bioluminescence generating system.



AMENDED SHEET



- 198 -

81. A delivery vehicle, comprising at least one component of a bioluminescence generating system.

82. The vehicle of claim 81, wherein the components comprise
5 a luciferin, a luciferase or a luciferin and a luciferase.

83. The vehicle of claim 81 or claim 82 wherein the vehicle is a liposome or a gelatin capsule.

84. The vehicle of any of claims 81-83, comprising micronized particles of the component(s).

10 85. An article of manufacture, comprising the delivery vehicle of any of claims 81-84, whereby the article of manufacture is a novelty item.

86. A combination, comprising the delivery vehicle of any of claims 81-84 and an article of manufacture selected from among
15 beverages, foods, body lotion, body cream, body paint, bubble compositions, fountains and toys.

87. The vehicle of claim 83, wherein the liposome or capsule is temperature, light or pH sensitive or water soluble or any combination thereof.

20 88. The article of manufacture of claim 85 that is fairy dust.

89. An isolated vacuole or endosome, comprising a luciferase.

90. A method of producing an isolated vacuole that contains
25 a luciferase, comprising expressing DNA encoding a luciferase in a host organism; and isolating the intact vacuoles from the host.

91. A spray container apparatus, comprising a housing portion having a top housing end and a bottom housing end and a plunger portion having a top end and a bottom end, wherein:

30 a) the top end of the plunger portion is open and sized to receive the bottom housing end;

b) the plunger portion has an inner bottom surface that forms a plunger;

35 c) an angular seal is situated on the inner bottom surface of the plunger portion and surrounds the plunger;

d) the bottom housing end of the housing portion is adapted to attach securely within the top end of the plunger portion, contacting the angular seal when so attached;

40 e) the bottom housing end has an indentation having a top wall and side walls, wherein:



SHEET



- 199 -

the top wall is adapted to at least partially break away from the side walls when pressure is applied to the top wall; and

5 f) the housing portion contains a dispensing mechanism.

92. A spray container apparatus of claim 91, further comprising a pellet that fits within the indentation of the bottom housing end.

10 93. A transgenic fish, comprising DNA encoding a luciferase.

94. Fish food for feeding the transgenic fish of claim 93, comprising a luciferin or a luciferase.

15 95. Plant food, comprising a luciferin in a carrier suitable for delivering nutrients to a plant.



* C L N S *

AMENDED SHEET

☐ Description : paged to paged
☒ Claim(s) : paged 187 to paged 200
☐ Drawing(s) : paged to paged
☐ Abstract : paged to paged

-187-

DATE OF RECEIPT 5/8/1999

CLAIMS:

1. A combination, comprising:
 - a) an article of manufacture selected from among toys, decorative lanterns, fountains, personal care items, fairy dust, beverages, soft drinks, foods, textile products, bubbles, balloons, personal items, dentifrices, soaps, body paints, bubble bath, novelty inks and paper products; and
 - b) one or more components of a bioluminescence generating system, whereby the combination is a novelty item.
2. The combination of claim 1, wherein the article of manufacture is selected from among toy guns, pellet guns, greeting cards, fingerpaints, foot bags, slimy play material, clothing, bubble making toys, bath powders, body lotions, gels, body powders, body creams, cosmetics, nail polishes, toothpastes, mouthwashes, soaps, body paints, bubble bath, board game toys, toy eggs, toy cigarettes, dolls, sparklers, magic wand toys, inks, wrapping paper, gelatins, icings, frostings, fairy dust, beer, wine, champagne, soft drinks, ice cubes, ice, dry ice and fountains.
3. The combination of claim 1 or claim 2 that is a toy gun.
4. The combination of claim 3, wherein the toy gun comprises two chamber in which one chamber contains a composition comprising up to all except one component of a bioluminescence generating system, and the other chamber contains a composition comprising the remaining component(s).
5. The combination of claim 2 that is a cosmetic.
6. The combination of claim 1 or claim 2 that is a beverage.
7. The combination of claim 1 or claim 2 that is a fountain.
8. The combination of claim 1 or claim 2 that produces water fireworks.
9. The combination of claim 1 or claim 2 that is a glowing card.

This is the replacement sheet

Date: - 5 AUG 1999



10. The combination of claim 1 or claim 2 that is a bubble making toy.
11. The combination of claim 1 or claim 2, further comprising means for delivering the remaining components of the bioluminescence generating system, whereby upon delivery the resulting novelty item glows.
- 5 12. The combination of claim 11, wherein the delivering means is selected from among a wand, a sponge, a spray bottle, an eyedropper, cotton and a textile.
13. The combination of claim 1 or claim 2, wherein the article of manufacture is an egg-shaped toy that comprises the bioluminescence generating
10 system.
14. The combination of claim 1 or claim 2, wherein the article of manufacture is a footbag that comprises the bioluminescence generating system.
15. The combination of claim 1 or claim 2 that is a beverage comprising one or more components of a bioluminescence generating system.
- 15 16. The combination of claim 15, wherein the beverage is selected from among beer, wine, champagne, and soft drinks.
17. The combination of claim 1 or claim 2 that is ice, comprising one or more components of a bioluminescence generating system.
18. The combination of claim 17 that is dry ice.
- 20 19. The combination of claim 1 or claim 2, wherein the component(s) is encapsulated in a vacuole or an endosome.
20. The combination of claim 1 or claim 2, wherein the article of manufacture comprises a single chamber apparatus that contains components of the bioluminescence generating system..
- 25 21. The combination of claim 20, further comprising, in the chamber, a pellet containing one or more of the remaining bioluminescence-generating components.
22. The combination of claim 20 or 21 that is a toy gun.
23. A combination, comprising:
30 an article of manufacture; and a fluorescent protein, whereby the combination is a novelty item.
24. The combination of claim 23, wherein the article of manufacture is a food.

This is the replacement sheet

Date: 25 AUG 1999



* C L M S *

25. The combination of claim 24, wherein the food is a beverage.
26. The combination of claim 23, wherein the article of manufacture is selected from among toys, decorative lanterns, fountains, personal care items, fairy dust, beverages, soft drinks, foods, textile products, bubbles, balloons, 5 personal items, dentifrices, soaps, body paints, bubble bath, novelty inks and paper products.
27. The combination of claim 26, wherein the combination is a toy.
28. The combination of claim 25, wherein the beverage is a soft drink.
29. The combination of any of claims 23-28, further comprising one or 10 more components of a bioluminescence generating system.
30. The combination of claim 25, wherein the beverage is an alcoholic beverage.
31. The combination of any of claims 23-30, wherein the fluorescent protein is encapsulated in a time-release vehicle.
- 15 32. The combination of any of claims 23-31, wherein the fluorescent protein is selected from green fluorescent protein, blue fluorescent protein and phycobiliprotein.
33. The combination of any of claims 3, 4 or 22 that is a toy gun, comprising:
- 20 a cartridge having at least one chamber for receiving the bioluminescence generating reagents;
- a body having a handle and a cartridge receptacle for receiving the cartridge;
- at least one container attachable to the cartridge receptacle for storing a 25 quantity of fluid; and
- a means for injecting the contents of the cartridge into the container whereby the contents of the chamber mix with the fluid to form a composition containing bioluminescence generating reagents.
34. The combination of claim 33, wherein the gun further comprises:
- 30 a barrel having a mixing chamber in fluid communication with the container, the barrel having a nozzle in fluid communication with the mixing chamber;
- a means for drawing the composition containing the bioluminescence



This is the replacement sheet

Date: 5 AUG 1999

generating reagents into the mixing chamber; and

a means for forcibly ejecting the composition within the mixing chamber from the mixing chamber and out through the nozzle.

35. The combination of claim 34, wherein the means for drawing the
5 composition comprises:

the barrel being extendable from the body; and

a chamber valve disposed within the mixing chamber so that when the barrel is extended, the chamber valve allows the composition into the mixing chamber, yet resists the flow of the composition from the mixing chamber
10 through the chamber valve .

36. The combination of claim 35, wherein the means for forcibly ejecting the composition comprises:

a barrel being collapsible towards the body; and

a chamber valve disposed within the mixing chamber and allowing the
15 entrance of composition into the mixing chamber, wherein when the barrel is collapsed towards the body, the chamber valve prevents the composition from exiting the mixing chamber through the chamber valve.

37. The combination of claim 36, wherein the cartridge further comprises:

20 a cartridge body having a plurality of ribs oriented on the body;

a first cylinder and a second cylinder disposed within the cartridge body and retained in place by the ribs;



This is the replacement sheet

Date: - 5 AUG 1999

a first piston and a second piston, the first piston disposed within the first cylinder and the second piston disposed with the second cylinder, each piston having a chamber for retaining a quantity of the bioluminescence generating reagents; and

5 a plunger attached to the first piston and second piston wherein advancing the plunger into the cartridge body urges the first piston through the first cylinder and the second piston through the second cylinder to eject the quantity of bioluminescence generating reagents from the first piston and the second piston.

10 38. The combination of claims 1-22, 29 and 32-37, wherein the component of the bioluminescence generating system in the combination comprises a luciferase.

39. The combination of claim 1 or claim 2, wherein the article of manufacture is a toy cigarette or cigarette-shaped.

15 40. The combination of claim 39, wherein the article of manufacture is a toy cigarette, comprising:

- a) a tubular delivery vehicle;
- b) filters covering each end of the tubular delivery vehicle; and
- c) particles comprising bioluminescence generating system

20 components in the tubular delivery vehicle, wherein the particles are smaller than the pores of the filters.

41. The combination of claims 1-22, 29 and 32-40, wherein a component of the bioluminescence generating system in the combination comprises a luciferin.

25 42. The combination of any of claims 1-22, 29, and 32-41, wherein the bioluminescence generating system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system, a crustacea system, a fish system, an annelid system, and an earthworm system.

30 43. The combination of any of claims 1-22, 29, and 32-42, wherein the bioluminescence generating system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Odontosyllis*, *Aristostomias*, *Oplophorus*, *Gaussia*, *Cavarnularia*, *Ptilosarcus*, *Stylatula*, *Acanthoptilum*, and *Parazoanthus*,



This is the replacement sheet

Date: - 5 AUG 1999

firefly, bacterial, *Mnemiopsis*, *Beroe*, *Gonadostomias*, *Halisturia*, Vampire squid, *Glyphus*, Mycotophid, *Vinciguerria*, *Howella*, *Florenciella*, *Chaudiodus*, *Melanocostus*, Sea Pens, mollusc, mushroom, fish, insect, glow worn, ctenophore and annelid systems.

5 44. The combination of any of claims 1-22, 29, and 32-43, comprising all components of the system except the activator that is required to initiate bioluminescence.

 45. The combination of any of claims 1-22, 29, and 32-43, comprising one or more of a luciferase, luciferin and activator.

10 46. A method of producing a glowing beverage, comprising:
 adding the components of a bioluminescence generating system o
a beverage, whereby the beverage glows.

 47. The method of claim 46, further comprising adding a fluorescent protein.

15 48. The method of claim 46 or claim 47, wherein the bioluminescence generating system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system, a crustacea system, a fish system, an annelid system, and an earthworm system.

 49. The method of claim 47 or claim 48, wherein the fluorescent
20 protein is encapsulated in a time-release vehicle.

 50. The method of claims 46-49, wherein the bioluminescence generating system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*, *Odontosyllis*, *Aristostomias*, *Oplophorus*, *Gaussia*, *Cavarnularia*, *Ptilosarcus*, *Stylatula*, *Acanthoptilum*, and *Parazoanthus*, firefly, bacterial,
25 *Mnemiopsis*, *Beroe*, *Gonadostomias*, *Halisturia*, Vampire squid, *Glyphus*, Mycotophid, *Vinciguerria*, *Howella*, *Florenciella*, *Chaudiodus*, *Melanocostus*, Sea Pens, mollusc, mushroom, fish, insect, glow worn, ctenophore and annelid systems.

 51. A kit comprising: the toy gun of any of claims 3, 4, 22, and 33-
30 36; and a loading or charging cartridge comprising one or more components of a bioluminescence generating system.

 52. A cartridge for loading a novelty item with components of a bioluminescence generating system, comprising:



This is the replacement sheet

Date: - 5 AUG 1999

a body comprising a chamber with an exit for delivering contents of the chamber;

a matrix material in the chamber; and

a plunger in the chamber, wherein the plunger comprises a piston that is
5 adapted to deliver a material linked to the matrix through the exit.

53. The cartridge of claim 52, further comprising a bioluminescence generating reagent linked to the matrix material.

54. The cartridge of claim 53, wherein the reagent is a luciferin or luciferase.

10 55. The cartridge of any of claims 52-54 that is adapted to deliver any contents into a an article of manufacture selected from toy guns, pellet guns, bubble making toys, beverage containers, and toothpaste containers.

56. The cartridge of claim 52, that is adapted to deliver its contents to the combination of claim 1.

15 57. The cartridge of claim 53, comprising:

a body comprising two chambers each having an exit;

a plunger means comprising a first piston aligned with the first chamber, and a second piston aligned with the second chamber;

whereby urging the plunger towards the body causes the first
20 piston to pressurize the first chamber thereby forcing the contents of the first chamber out the exit of the first chamber, and causes the second piston to pressurize the second chamber thereby forcing the contents of the second chamber out the exit of the second chamber; and

a matrix material positioned within at least one of the chambers;
25 wherein the pressurization of the chamber containing the matrix material forces any contents within this chamber through the matrix material, whereby material linked to the matrix is flushed out of the exit.

58. The cartridge of claim 57, further comprising a matrix material in at least one of the chambers, wherein one or more of the reagents of a
30 bioluminescence generating system are linked to a matrix material.

59. The cartridge of claim 53 or claim 58, wherein the bioluminescence generating system is selected from among an insect system, a coelenterate system, a ctenophore system, a bacterial system, a mollusk system,



This is the replacement sheet

Date: - 5 AUG 1999

a crustacea system, a fish system, an annelid system, and an earthworm system.

60. The cartridge of claim 59, wherein the bioluminescence generating system is selected from among *Aequorea*, *Vargula*, *Renilla*, *Obelin*, *Porichthys*,
5 *Odontosyllis*, *Aristostomias*, *Oplophorus*, firefly, and bacterial systems.

61. The cartridge of any of claims 52-60, further comprising a locking device that prevents compression of the plunger.

62. A method of recharging a bioluminescent novelty item having at least one filler port, comprising the steps of:

10 positioning a dispensing cartridge of any of claims 52-61 adjacent to a filler port(s) of a novelty item, the dispensing cartridge containing a matrix material comprising a bioluminescence generating reagent and having a means for dispensing the reagent from the dispensing cartridge; and

operating the dispensing means to dispense the reagent from the
15 dispensing cartridge through the filler ports and into the novelty item.

63. The method of claim 62, wherein the novelty item is a toy gun.

64. A combination, comprising:
a dual chamber container; and
20 one or more components of a bioluminescence generating system in one chamber, and the remaining components in the other chamber.

65. An article of clothing comprising a matrix material and a component of a bioluminescence generating system linked to the material,
25 whereby the article is a novelty item and wherein the matrix material is selected from among cotton, polyester, polyester-cotton blends, polypropylene, polyvinyltoluene, polyvinyl propylene, celluloses, cellulose derivatives, acrylic resins, glass, silicon, ceramics, silica gels, polystyrene, gelatins, polyacrylates, polyvinyl pyrrolidone, co-polymers of vinyl, polyacrylamides, latex gels, dextran,
30 rubber, silicon, plastics, nitrocellulose, celluloses, natural sponges, synthetic sponges and porous glass.

66. A fluid dispensing apparatus, comprising:

a) two chambers, each having an upper end and a lower end;



This is the replacement sheet

Date: 5 AUG 1999

b) a gas chamber in communication with the upper end of the two chambers and adapted to receive a canister of pressurized gas;

c) a mixing chamber in communication with the lower end of the chambers; and

5 d) a nozzle operatively attached to the mixing chamber.

67. The fluid dispensing apparatus of claim 66, further comprising removable separation means situated between the two chambers and the mixing chamber, selected from among blow-out plugs, one-way valves and pneumatic valves.

10 68. The apparatus of claim 66 or claim 67, containing a composition comprising one or more components of a bioluminescence generating system.

69. A compressible dispensing apparatus, comprising:

a) a compressible housing having a dispensing end;

15 b) two chambers within the housing, each in fluid communication with the dispensing end of the housing and each containing a mixture;

c) a cap apparatus adapted to removably attach to the dispensing end of the housing and having a mixing chamber and top cap, wherein the top cap is situated distal to the dispensing end of the housing; and

20 d) a membrane seal situated between the dispensing end of the housing and the cap apparatus.

70. A container apparatus, comprising:

a) a container having a top end, a neck and a bottom end;

25 b) a piercing needle located at the bottom end of the bottle;

c) a bladder situated, non-permanently, within the neck of the container;

30 d) a cap having a plunger operatively attached to its inside surface, wherein the cap is adapted to removably attach to the top end of the container including along a portion of the neck of the container; and

e) a collar adapted to removably encircle the exterior of the neck of the container such that the cap can be securely attached to the top of the container when the collar is in place and can be securely



This is the replacement sheet

Date: 5 AUG 1999

attached to the top and along the neck of the bottle when the collar is removed.

71. A combination, comprising:

the apparatus of claim 70; and

5 one or more components of a bioluminescence generating system.

72. A volcano-shaped fluid dispensing apparatus, comprising:

a) a first half-conical chamber having a first interior edge and a top end which is smaller than its bottom end;

10 b) a second half-conical chamber having a second interior edge and a top end which is smaller than its bottom end, wherein the second chamber is attached, along its second interior edge to the first chamber along its first interior edge;

15 c) a gas chamber defined by the first interior edge of the first chamber and by the second interior edge of the second chamber and which is adapted to receive a canister of pressurized gas;

d) a gas conduit in communication with the gas chamber and each of the chambers, which gas conduit is defined by the first interior edge of the first chamber and the second interior edge of the second chamber;

20 e) a mixing chamber in communication with each of the chambers at the bottom end of the chambers, the mixing chamber is defined by the first interior edge of the first chamber and the second interior edge of the second chamber; and

25 f) a nozzle in attached to the mixing chamber and extending from the mixing chamber to the top end of the chambers, wherein the nozzle is defined by the first interior edge of the first chamber and the second interior edge of the second chamber.

73. The volcano-shaped fluid dispensing apparatus of claim 72, further comprising:

30 g) removable separation means situated between the gas conduit and each of the chambers, and selected from among blow-out plugs, one-way valves and pneumatic valves; and

h) removable separation means situated between each of the



This is the replacement sheet

Date: - 5 AUG 1999

chambers and the mixing chamber, and selected from among blow-out plugs, one-way valves and pneumatic valves.

74. A combination, comprising:

the apparatus of claim 73; and

5 one or more components of a bioluminescence generating system.

75. A fluid dispensing apparatus, comprising:

a) two chambers, each having an upper end and a lower end and each having a gas inlet in the upper end and a fluid outlet in the lower end;

10 b) a gas chamber adapted to receive a canister of pressurized gas, situated between the chambers and having a top end, a gas outlet within the top end and a base end;

c) an upper support operatively attached across the upper ends of the chambers and the top end of the gas chamber;

15 d) two gas conduits, contained within the upper support and each operatively attached to the gas outlet of the gas chamber and operatively attached to a different of the gas inlets of the chambers;

e) a gas control valve operatively attached to the gas chamber, such that the flow of gas from the gas chamber into the gas conduits is regulable;

20 f) a mixing chamber having a bottom inlet and top outlet and situated between the chambers;

g) a base support operatively attached across the lower ends of the chambers and the bottom inlet of the mixing chamber;

25 h) two fluid ports contained within the base support, each of the fluid ports is operatively attached to the bottom inlet of the mixing chamber and operatively attached to the lower end of the chambers;

i) two removable separation means, each situated within the fluid ports between the chambers and the mixing chamber and each, independently selected from among blow-out plugs, one-way valves and pneumatic valves; and



This is the replacement sheet

Date:

5 AUG 1999

j) a nozzle operatively attached to the mixing chamber and extending through the upper support.

76. A combination, comprising:

the apparatus of claim 75; and

5 one or more components of a bioluminescence generating system.

77. A combination, comprising:

a fluid dispensing apparatus that comprises:

a) a first chamber;

10 b) a second collapsible chamber, attached to the bottom end of and in communication with the first chamber; and

c) a removable separation means between the first chamber and the second chamber.; and

one or more components of a bioluminescence generating system.

78. The fluid-containing apparatus of claim 77, comprising:

15 a) a first chamber having a bottom opening;

b) a second chamber having a top opening in communication with the bottom opening of the first chamber and is operatively attached to the bottom end of the first chamber and adapted to collapse against the first chamber; and

20 c) a rupturable membrane situated between the bottom opening of the first chamber and the top opening of the second chamber.

79. The apparatus of claim 77, further comprising a cap, attached to the top end of the first chamber, having a bubble-blowing wand integral thereto and situated within the apparatus.

25 80. A combination, comprising:

the fluid dispensing apparatus of any of claims 77-79; and

one or more components of a bioluminescence generating system.

81. A delivery vehicle, comprising at least one component of a bioluminescence generating system.

30 82. The vehicle of claim 81, wherein the components comprise a luciferin, a luciferase or a luciferin and a luciferase.

83. The vehicle of claim 81 or claim 82 wherein the vehicle is a liposome or a gelatin capsule.

This is the replacement sheet

Date: - 5 AUG 1990



84. The vehicle of any of claims 81-83, comprising micronized particles of the component(s).

85. An article of manufacture, comprising the delivery vehicle of any of claims 81-84, whereby the article of manufacture is a novelty item.

5 86. A combination, comprising the delivery vehicle of any of claims 81-84 and an article of manufacture selected from among beverages, foods, body lotion, body cream, body paint, bubble compositions, fountains and toys.

87. The vehicle of claim 83, wherein the liposome or capsule is temperature, light or pH sensitive or water soluble or any combination thereof.

10 88. The article of manufacture of claim 85 that is fairy dust.

89. An isolated vacuole or endosome, comprising a luciferase.

90. A method of producing an isolated vacuole that contains a luciferase, comprising expressing DNA encoding a luciferase in a host organism; and isolating the intact vacuoles from the host.

15 91. A spray container apparatus, comprising a housing portion having a top housing end and a bottom housing end and a plunger portion having a top end and a bottom end, wherein:

a) the top end of the plunger portion is open and sized to receive the bottom housing end;

20 b) the plunger portion has an inner bottom surface that forms a plunger;

c) an angular seal is situated on the inner bottom surface of the plunger portion and surrounds the plunger;

25 d) the bottom housing end of the housing portion is adapted to attach securely within the top end of the plunger portion, contacting the angular seal when so attached;

e) the bottom housing end has an indentation having a top wall and side walls, wherein:

30 the top wall is adapted to at least partially break away from the side walls when pressure is applied to the top wall; and

f) the housing portion contains a dispensing mechanism.

92. A spray container apparatus of claim 91, further comprising a pellet that fits within the indentation of the bottom housing end.

This is the replacement sheet



Date: - 5 AUG 1999

93. A transgenic fish, comprising DNA encoding a luciferase.
94. Fish food for feeding the transgenic fish of claim 93, comprising a luciferin or a luciferase.
95. Plant food, comprising a luciferin in a carrier suitable for delivering 5 nutrients to a plant.
96. The combination of claim 24, wherein the toy is a bubble-toy.
97. The combination of claim 1 or claim 24, wherein the food is selected from among soft drinks, beer, wine, champagne, juice, soft drinks, ice cubes, ices, gelatins, ice creams, sorbets, ices, frostings, cakes, sauces, dessert 10 toppings, cookies, biscuits, puddings, and candies.
98. The combination of claim 1 or claim 24, wherein the article of manufacture is selected from among toy guns, pellet guns, greeting cards, fingerpaints, foot bags, slimy play material, clothing, bubble making toys, bath powders, body lotions, gels, body powders, body creams, cosmetics, 15 toothpastes, mouthwashes, soaps, body paints, bubble bath, board game toys, toy eggs, toy cigarettes, dolls, sparklers, magic wand toys, inks, wrapping paper, gelatins, icings, frostings, fairy dust, beer, wine, champagne, soft drinks, ice cubes, ice, dry ice and fountains.



This is the replacement sheet

Date: 5 AUG 1999



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: F21K 2/00, 2/06, F41C 3/00, F21P 1/02, B05B 17/08, A23L 1/03, 2/00, A23G 1/00, 9/02, A23K 1/18, D06Q 1/00, A63H 27/10, A61K 7/00, 7/16, 9/127	A2	(11) International Publication Number: WO 97/29319 (43) International Publication Date: 14 August 1997 (14.08.97)																		
(21) International Application Number: PCT/US97/01699 (22) International Filing Date: 3 February 1997 (03.02.97) (30) Priority Data: 597,274 6 February 1996 (06.02.96) US 757,046 25 November 1996 (25.11.96) US (71)(72) Applicant and Inventor: BRYAN, Bruce, J. (US/US); 716 Arden Drive, Beverly Hills, CA 90210 (US). (74) Agent: SEIDMAN, Stephanie, L.; Brown Martin Haller & McClain, 1660 Union Street, San Diego, CA 92101-2926 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>																			
(54) Title: BIOLUMINESCENT NOVELTY ITEMS																				
(57) Abstract																				
Systems and apparatus for generating bioluminescence, and combinations of these systems and apparatus with inanimate articles of manufacture to produce novelty items are provided. These novelty items, which are articles of manufacture, are designed for entertainment, recreation and amusement, and include toys, paints, slimy play material, textiles, particularly clothing, bubbles in bubble making toys and other toys that produce bubbles, balloons, personal items, such as bath powders, body lotions, gels, powders and creams, toothpastes and other dentifrices, soaps, body paints, and bubble bath, foods, such as gelatins, icings and frostings, beverages such as beer, wine, champagne, soft drinks, and glowing ice, fountains, including liquid "fireworks" and other such jets or sprays or aerosols of compositions that are solutions, mixtures, suspensions, powders, pastes, particles or other suitable formulation. Cartridges for charging and/or recharging the novelty items with bioluminescence generating systems are also provided.																				
<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">REPLACED SHEETS</td> <td style="text-align: center;">SG</td> </tr> <tr> <td>☐</td> <td>Description : paged</td> <td>to paged</td> </tr> <tr> <td>☒</td> <td>Claim(s) : paged 177</td> <td>to paged 200</td> </tr> <tr> <td>☐</td> <td>Drawing(s) : paged</td> <td>to paged</td> </tr> <tr> <td>☐</td> <td>Abstract : paged</td> <td>to paged</td> </tr> <tr> <td colspan="3">DATE OF RECEIPT</td> </tr> </table>			REPLACED SHEETS		SG	☐	Description : paged	to paged	☒	Claim(s) : paged 177	to paged 200	☐	Drawing(s) : paged	to paged	☐	Abstract : paged	to paged	DATE OF RECEIPT		
REPLACED SHEETS		SG																		
☐	Description : paged	to paged																		
☒	Claim(s) : paged 177	to paged 200																		
☐	Drawing(s) : paged	to paged																		
☐	Abstract : paged	to paged																		
DATE OF RECEIPT																				