(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
10 September 2010 (10.09.2010)

PCT

(10) International Publication Number
WO 2010/102076 A3

(51) International Patent Classification:
E21B 33/038 (2006.01) *E21B 33/04* (2006.01)

(21) International Application Number:
PCT/US2010/026145

(22) International Filing Date:
4 March 2010 (04.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/399,050 6 March 2009 (06.03.2009) US

(71) Applicant *(for all designated States except US)*: **DRILQUIP, INC.** [US/US]; 13550 Hempstead Highway, Houston, TX 77040-5851 (US).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **WILLIAMS, Gregory, D.** [US/US]; 14506 Silver Lace Lane, Houston, TX 77070 (US).

(74) Agent: **FULGHUM, Roger**; Baker Botts L.L.P., 910 Louisiana Street, Houston, TX 77002-4995 (US).


(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

[Continued on next page]

(54) Title: WELLHEAD CONVERSION SYSTEM AND METHOD

FIG. 1

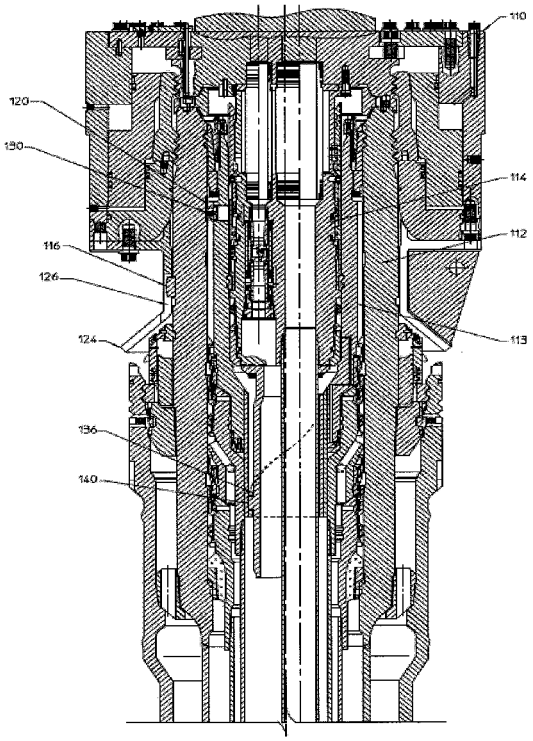

(57) Abstract: Methods and systems relating to subsea wellhead orientation are disclosed. I one embodiment, a method comprises providing a wellhead (112) with an orientation key (116) on an outer surface (118) and an opening (120) on an inner surface (122); providing the Christmas tree attached to a guide tube having an orientation profile (126) configured to engage the orientation key; providing a lockdown sleeve (113) with a mating profile (140) on an inner surface (138), and a protuberance (132) on an outer surface (134) configured to engage the opening on the inner surface of the wellhead; providing the tubing hanger (114) with a mating profile (136) on an outer surface (142) configured to engage the mating profile of the lockdown sleeve; moving the lockdown sleeve into engagement with the wellhead; moving the tubing hanger into engagement with the lockdown sleeve; and moving the Christmas tree into engagement with the wellhead and the tubing hanger.

WO 2010/102076 A3

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
4 November 2010