

(51) International Patent Classification:
B01J 29/06 (2006.01)**LACY, Darryl, D.** [US/US]; 3400 Bridlepath Road, Easton, PA 18045 (US).(21) International Application Number:
PCT/US2011/023990(74) Agents: **MIGLIORINI, Robert, A.** et al.; Exxonmobil Research And Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).(22) International Filing Date:
8 February 2011 (08.02.2011)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/337,694 9 February 2010 (09.02.2010) US(71) Applicant (for all designated States except US):
EXXONMOBIL RESEARCH AND ENGINEERING COMPANY [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).(72) Inventor (for US only): **KAY, Robert, E.**; 4016 Sutton Road, Easton, PA 18045 (US).

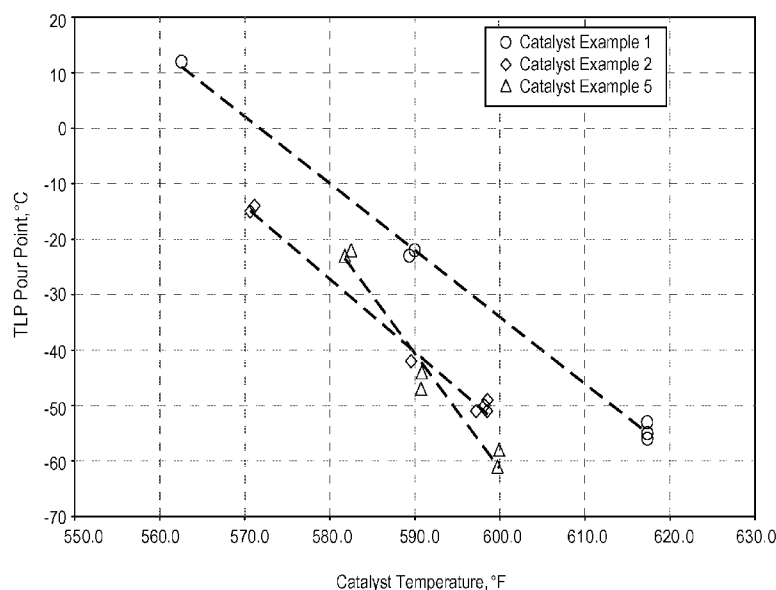
(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MCCARTHY, Stephen, J.** [US/US]; 4440 Devonshire Drive, Center Valley, PA 18034 (US). **LAL, Wenyih, Frank** [US/US]; 656 Bellerive Court, Bridgewater, NJ 08807 (US).

[Continued on next page]

(54) Title: DEWAXING CATALYSTS

FIG. 5

(57) Abstract: A supported catalyst comprises a zeolite having a silica to alumina molar ratio of 500 or less, a first metal oxide binder having a crystallite size greater than 200 Å and a second metal oxide binder having a crystallite size less than 100 Å, wherein the second metal oxide binder is present in an amount less than 15 wt% of the total weight of the catalyst.

WO 2011/100218 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*