



(51) International Patent Classification:

H04W 28/04 (2009.01)

(21) International Application Number:

PCT/CN2013/085053

(22) International Filing Date:

11 October 2013 (11.10.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/707,559 28 September 2012 (28.09.2012) US

14/040,440 27 September 2013 (27.09.2013) US

(71) Applicant: HUAWEI TECHNOLOGIES CO., LTD.

[CN/CN]; Huawei Administration Building, Bantian, Longgang, Shenzhen, Guangdong 518129 (CN).

(72) Inventors: KWON, Young Hoon; 7273 Canyon Glen

Court, San Diego, California 92129 (US). YANG, Yun-song; 4697 Torrey Circle, Apt.D304, San Diego, California 92130 (US). RONG, Zhigang; 13565 Silver Ivy Ln., San Diego, California 92129 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR RESPONSE FRAME TYPE INDICATION

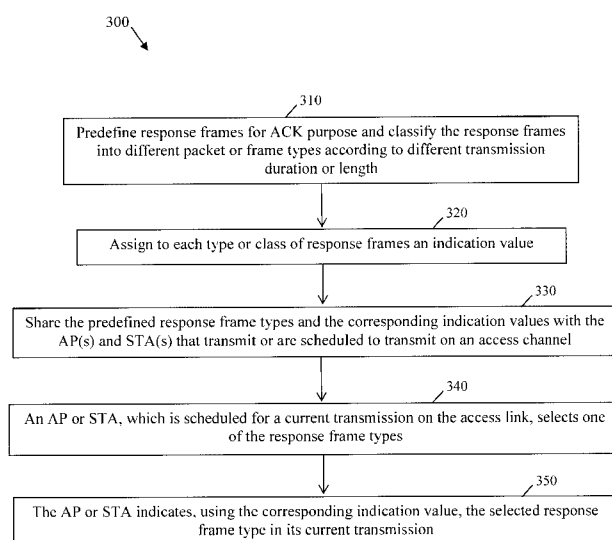


FIG. 3

(57) Abstract: Embodiments are provided for indicating response frame types according to response frame durations in a wireless network. The embodiments include defining a plurality of response frame types in accordance to different transmission durations. The different response frame types are assigned corresponding indication values. When transmitting a current frame to a receiver entity, a transmitter entity selects a response frame type from the defined response frame types, and indicates in the current frame the selected response frame type using the assigned indication value. When a third entity receives the current frame, the third entity waits for a time period about equal to a predefined inter-frame and backoff time before transmitting a new frame. Upon determining that the indication value in the current frame is for sending a response frame, the third entity also waits an additional time period about equal to the transmission duration of the indicated response frame type.



- *with information concerning request for restoration of the right of priority in respect of one or more priority claims (Rules 26bis.3 and 48.2(b)(vii))*