



(51) International Patent Classification:
A61F 13/15 (2006.01)

(21) International Application Number:
PCT/JP2010/054734

(22) International Filing Date:
15 March 2010 (15.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2009-130887 29 May 2009 (29.05.2009) JP

(71) Applicant (for all designated States except US): **LIVEDO CORPORATION** [JP/JP]; 45-2, Handaotsu, Kanadacho, Shikokuchuo-shi, Ehime, 7990122 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TAKAHASHI, Yuki** [JP/JP]; c/o Tokushima Sadamitsu Factory in LIVE-DO CORPORATION, 89-1, Aza Koyamakita, Sadamitsu, Tsurugi-cho, Mima-gun, Tokushima, 7794104 (JP). **NAKAOKA, Kenji** [JP/JP]; c/o LIVEDO CORPORATION Osaka Business Head Office, 6-10, Kawaramachi 1-chome, Chuo-ku, Osaka-shi, Osaka, 5410048 (JP).

(74) Agents: **UEKI, Kyuichi** et al.; Fujita-Toyobo Building 9th Floor, 1-16, Dojima 2-chome, Kita-ku, Osaka-shi, Osaka, 5300003 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PANTS-TYPE DISPOSABLE DIAPER

Fig. 4

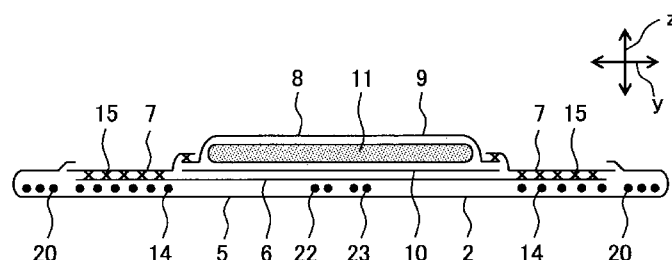

(57) Abstract: A pants-type disposable diaper comprises: a pants-shaped outer member having a front part, a back part, and a crotch part positioned between the front part and the back part, and having a waist opening and a pair of leg openings formed by joining the front part and the back part; an absorbent main body disposed on an inner surface of the pants-shaped outer member at the crotch part, and comprising a top sheet, a back sheet, and an absorbent core disposed between the top sheet and the back sheet; and an end-holding sheet covering a longitudinal end of the absorbent main body at the front part and/or the back part of the pants-shaped outer member, and attached to the pants-shaped outer member and the absorbent main body with a hot-melt adhesive; wherein the end-holding sheet includes a composite nonwoven fabric in which a spunbonded nonwoven fabric layer is laminated on an inner surface of a meltblown nonwoven fabric layer. According to the pants-type disposable diaper on the above, a hot-melt adhesive is prevented from permeating an end-holding sheet, whereby a skin problem is less likely to be caused for the wearer.