

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 February 2007 (08.02.2007)

PCT

(10) International Publication Number
WO 2007/015680 A1

(51) International Patent Classification:

F04F 3/00 (2006.01) **B01L 3/02** (2006.01)
F04B 43/02 (2006.01) **B67D 5/42** (2006.01)

(21) International Application Number:

PCT/SG2005/000259

(22) International Filing Date: 1 August 2005 (01.08.2005)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **YEO, Jui Hwa** [SG/SG]; Block 356 #08-1830,
Yishun Ring Road, Singapore 760356 (SG).

(74) Agent: **K.L. TAN & ASSOCIATES**; 144A Neil Road,
Singapore 088873 (SG).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,

GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (*Rule 4.17(iv)*)

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PUMP

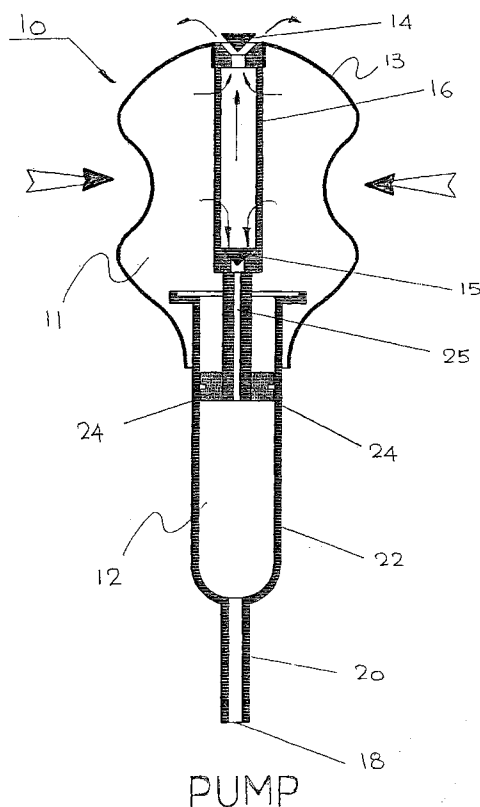

(57) Abstract: A fluid drawing device (10) comprising a hand pump (11) connected to a fluid reservoir (12). The reservoir (12) has an inlet/outlet orifice (18) through which fluid can be drawn into and expelled from the reservoir (12). The pump (11) comprises a squeeze bulb (13) with an air release valve (14) in its wall and an air intake valve (15). Compressing the bulb (13) releases the air to the atmosphere through the release valve (14), subsequent decompression of the bulb (13) draws air through the intake valve (15) from the reservoir (12) reducing the pressure in it to draw fluid through the orifice (18) into the reservoir (12). Pushing a plunger (24) slidably housed within the reservoir (12) expels the fluid out through the orifice (18).

WO 2007/015680 A1