



FIG.2

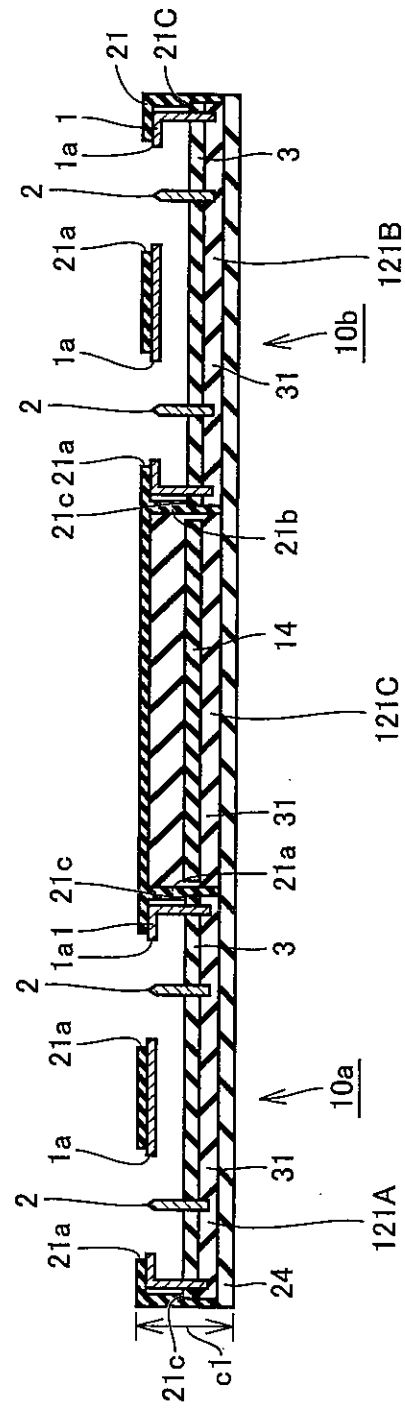


FIG.3

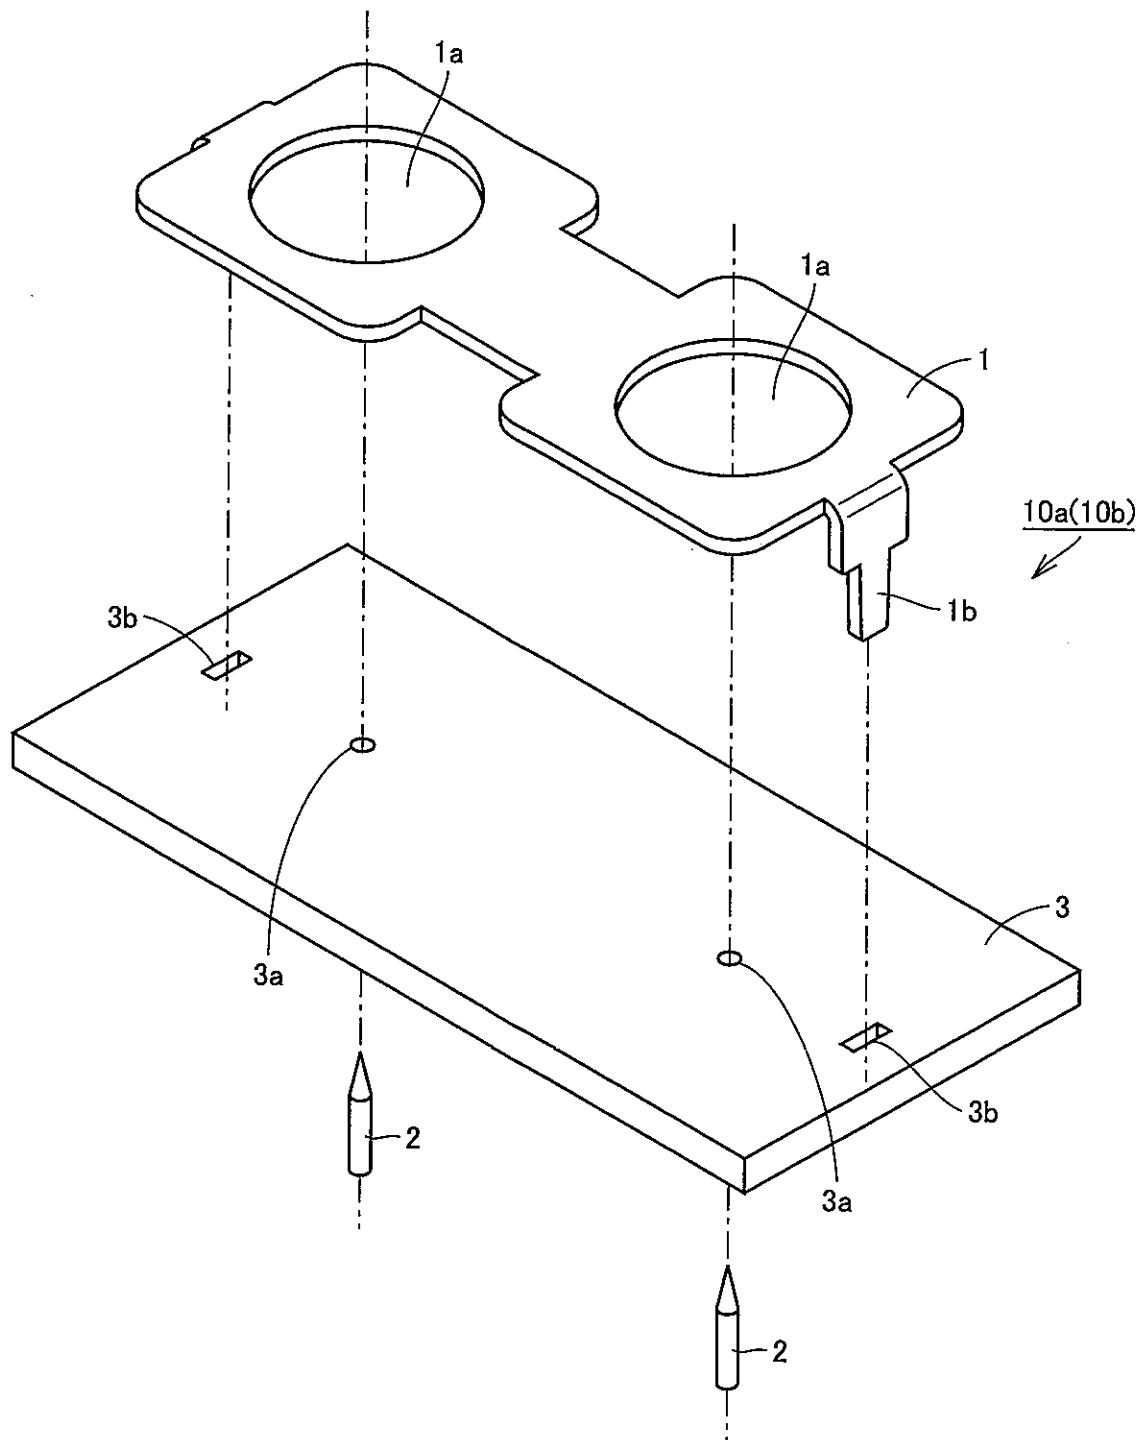


FIG. 4

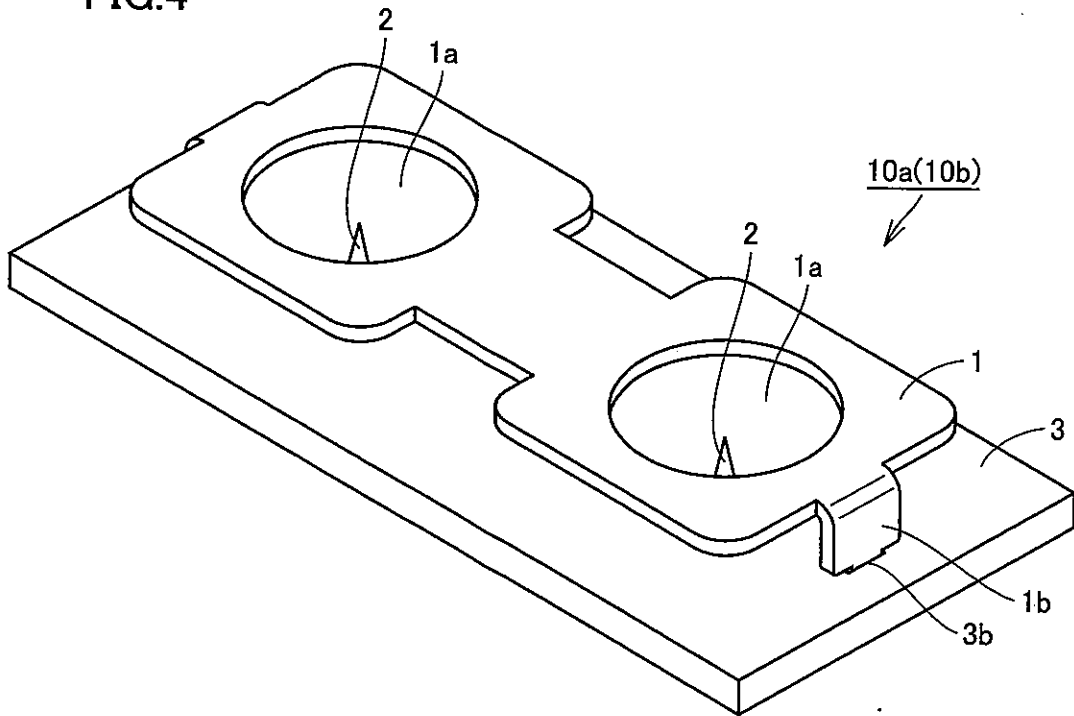


FIG. 5


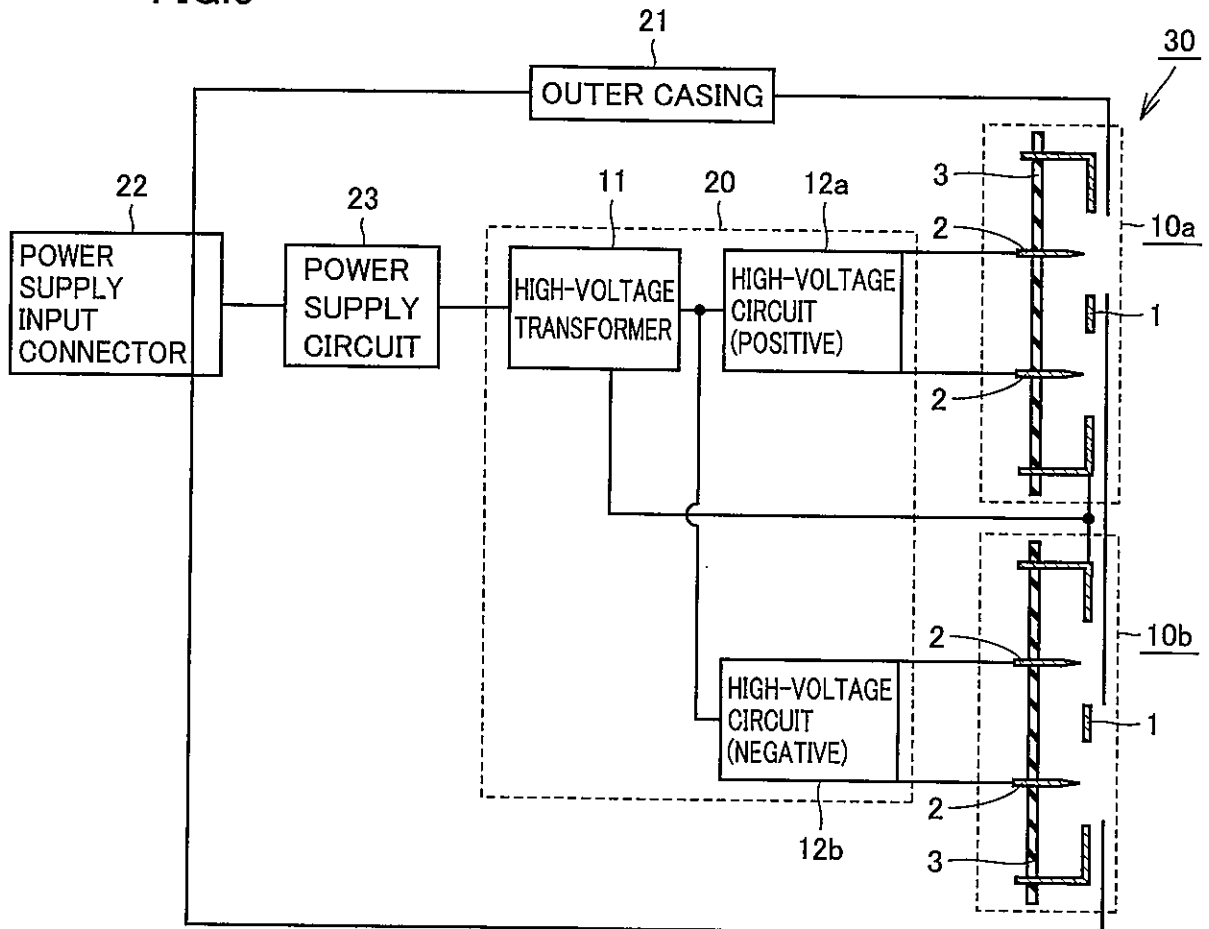


FIG.6  
(A)

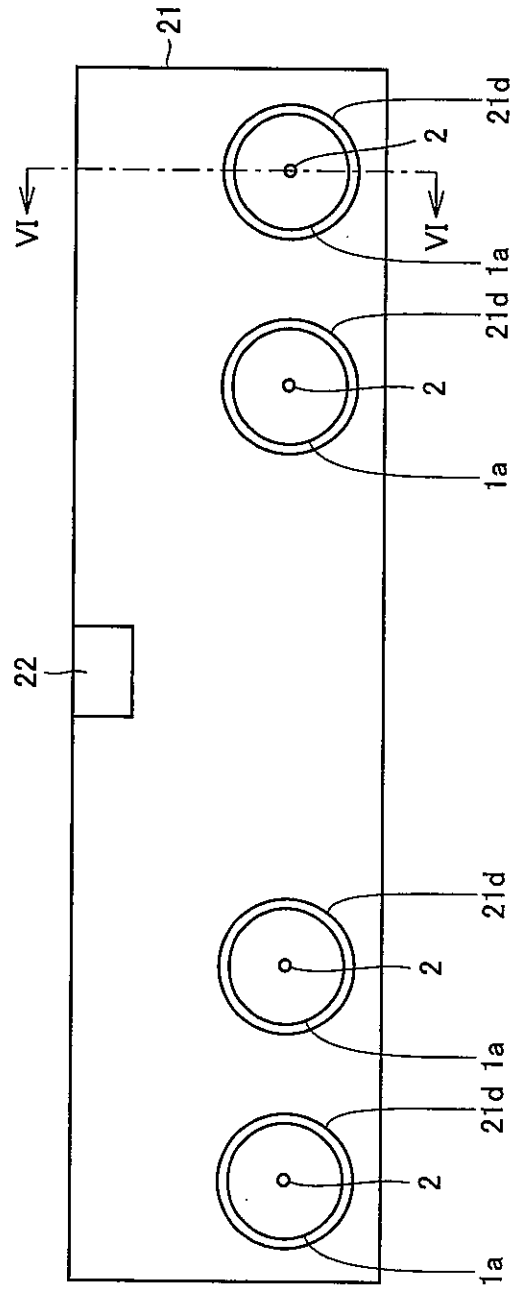

(B)





FIG.7  
(A)

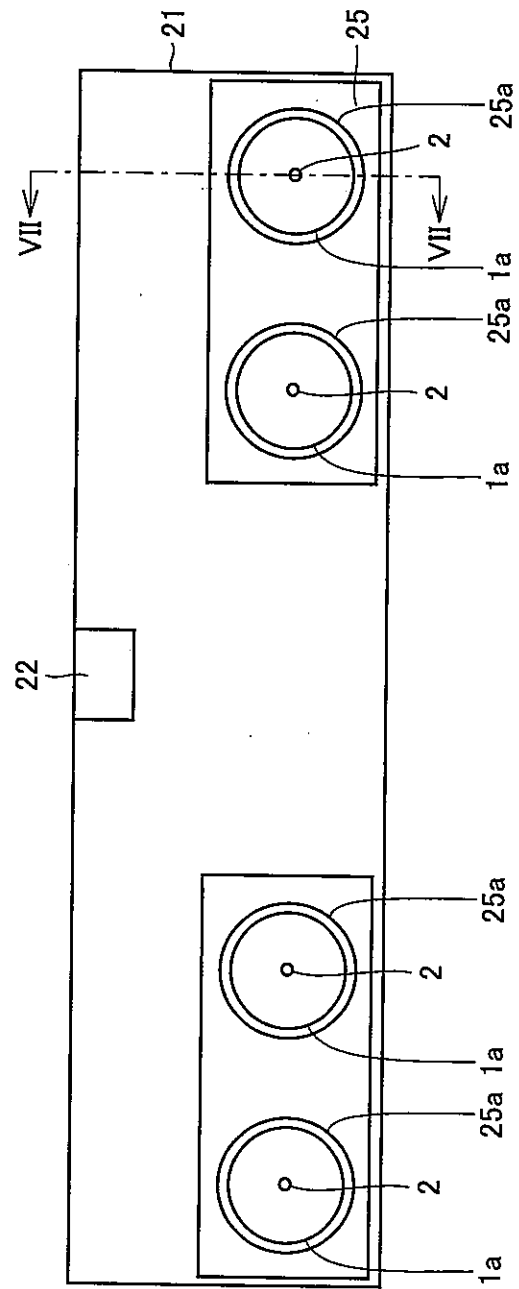

(B)

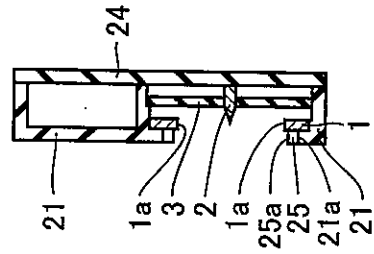


FIG. 9

FIG. 9 is a perspective view of the rear of the device 60. The device 60 is shown with its rear panel 64. The internal fan assembly is visible, including the fan 65 and the air blowing direction indicated by arrows. The rear panel 64 is shown with various components labeled 30(P1), 21d, 30(P2), and 60. The air flow paths are labeled C, B, A, B, C, indicating the direction of air circulation.

FIG.10


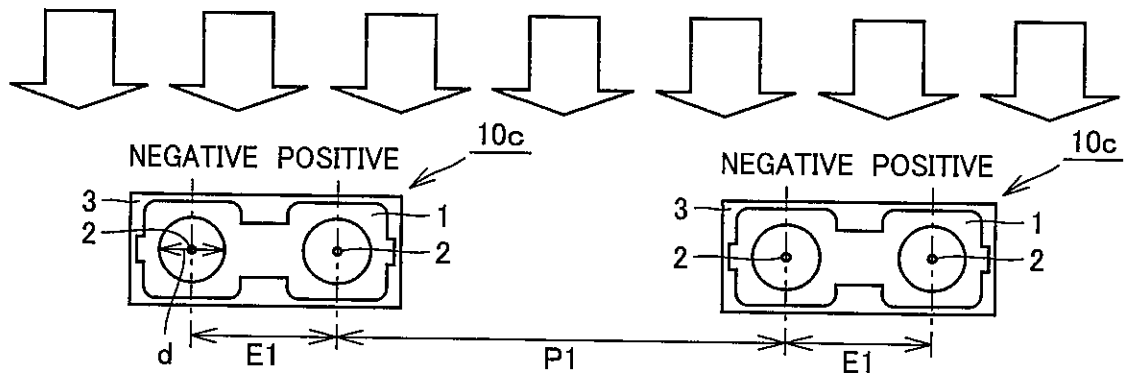


FIG.11

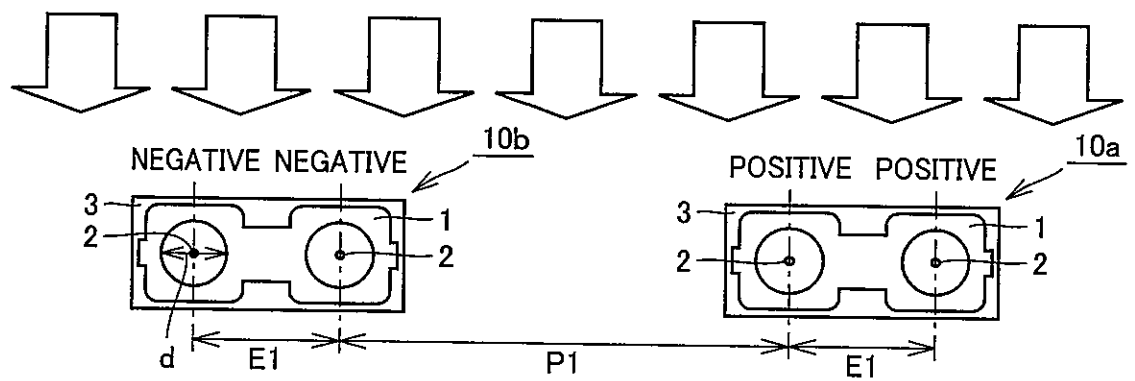

9/11

FIG.12

ELECTRODE PITCH/THROUGH HOLE DIAMETER AND ION RATIO

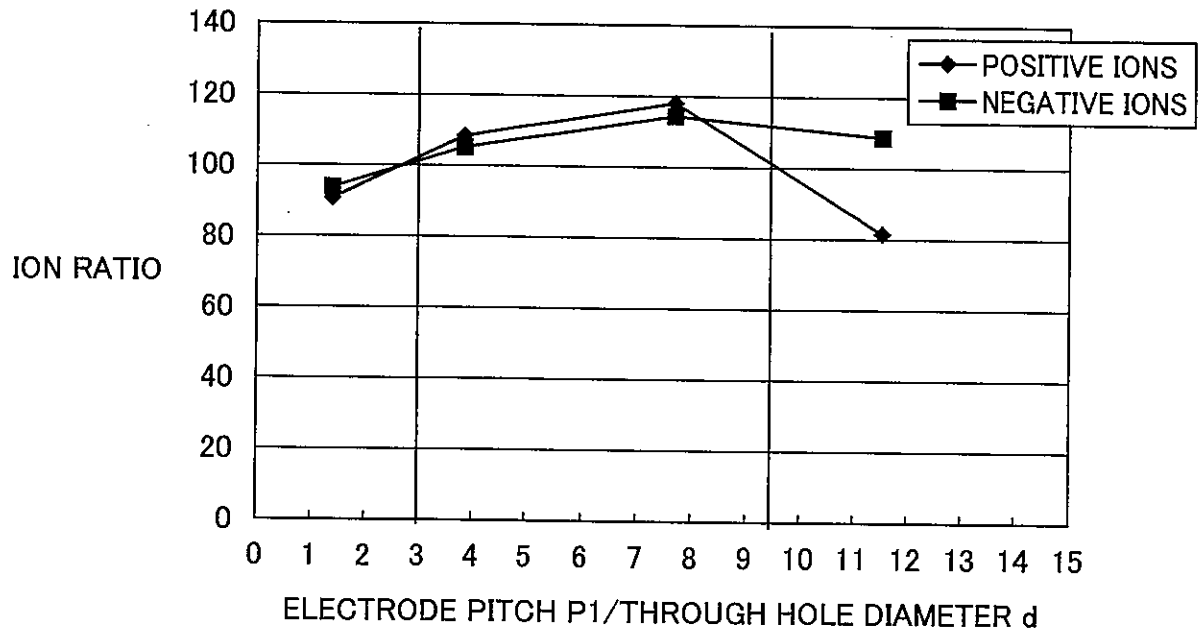


FIG.13

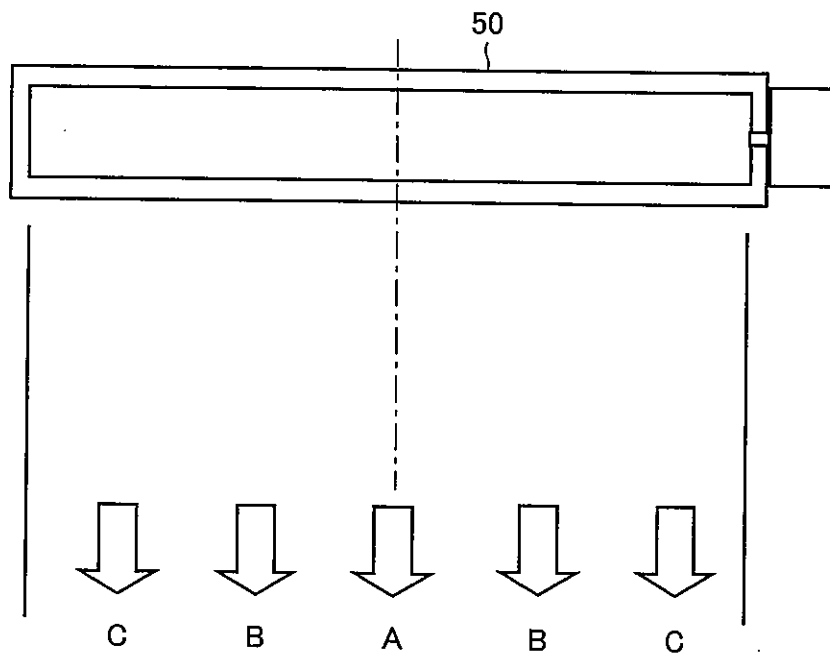


FIG.14

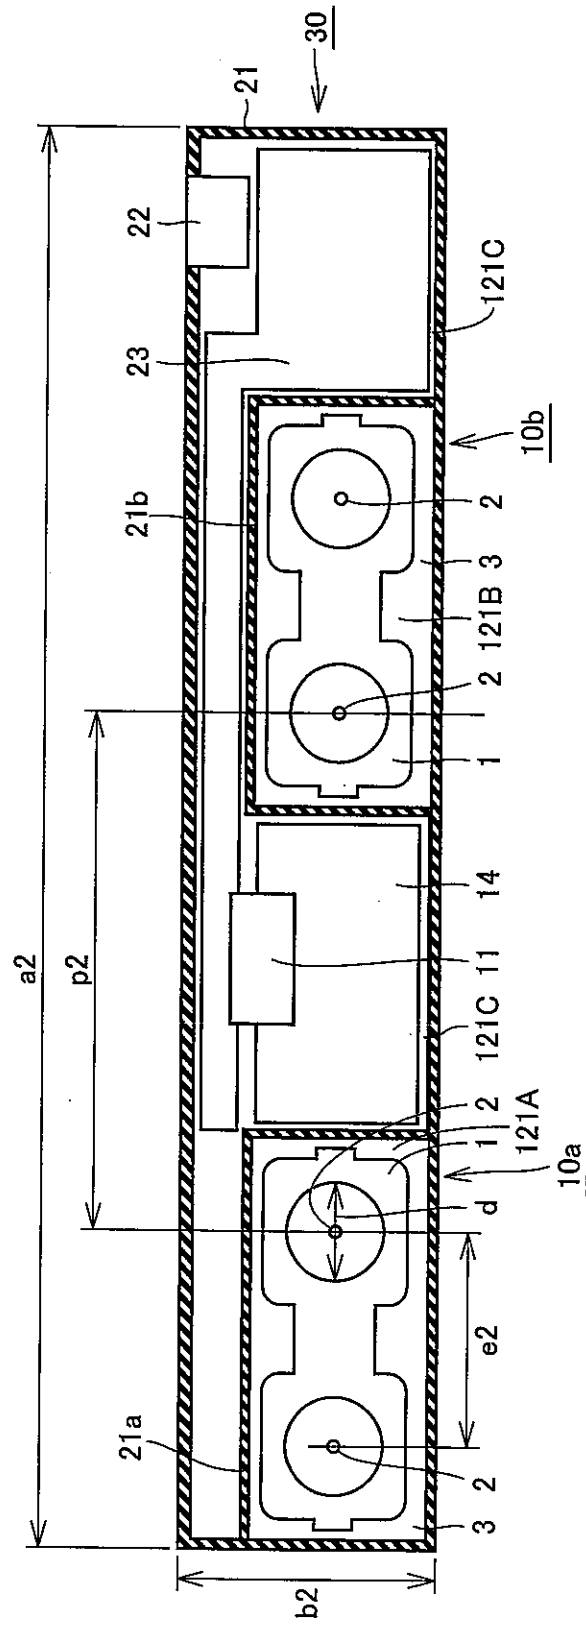


FIG.15

