



(43) International Publication Date
20 December 2012 (20.12.2012)

- (51) International Patent Classification:
B60F 3/00 (2006.01)
- (21) International Application Number:
PCT/GB2012/051344
- (22) International Filing Date:
13 June 2012 (13.06.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/496,297 13 June 2011 (13.06.2011) US
- (71) Applicant (for all designated States except US): **GIBBS TECHNOLOGIES LIMITED** [GB/GB]; Avenue Road, Nuneaton, Warwickshire CV11 4LY (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **GIBBS, Alan Timothy** [NZ/GB]; 28 Albert Bridge House, 127 Albert Bridge Road, London SW11 4PL (GB). **CARLSON, Eric John** [US/US]; 3475 W. Coon Lake Road, Howell, Michigan 48843 (US).
- (74) Agent: **HICKS, Paul Edward**; Boulton Wade Tennant, Verulam Gardens, 70 Gray's Inn Road, London WC1X 8BT (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: AMPHIBIAN HULL

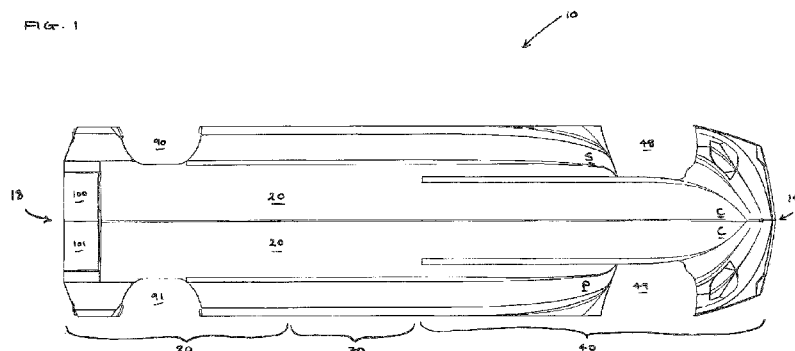

(57) Abstract: The present invention provides, with reference to Figure 1, an amphibian operable in land and marine modes comprising a hull, at least one discontinuity provided in the hull, and at least one retractable wheel or track drive assembly at least partially located in the at least one discontinuity. A wheel or track drive of the at least one retractable wheel or track drive assembly is retracted above the lowest point of the hull when operating in marine mode, and at least part of the wheel or track drive is protracted below the lowest point of the hull when operating in land mode. The hull is a planing V hull, and the hull has a forward bow section defining a frontal bow surface/area across a beam of the hull. The at least one discontinuity is provided in the forward bow section of the hull, and at least a portion of the wheel or track drive of the at least one retractable wheel or track drive assembly is located ahead of and in front of at least a portion of the frontal bow surface/area when protracted.

