



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ :

F02F 3/00, F16J 1/12

A1

(11) International Publication Number:

WO 00/61935

(43) International Publication Date:

19 October 2000 (19.10.00)

(21) International Application Number: PCT/DK00/00123

(22) International Filing Date: 17 March 2000 (17.03.00)

(30) Priority Data:

PA 1999 00458 7 April 1999 (07.04.99) DK

(71) Applicant (for all designated States except US): MAN B & W DIESEL A/S [DK/DK]; Tegholmegade 41, DK-2450 Copenhagen SV (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): JENSEN, Søren, Helmuth [DK/DK]; Skodsborgvej 406, DK-2942 Skodsborg (DK).

(74) Agents: OLSEN, Lau, Lund et al.; International Patent-Bureau, Høje Taastrup Boulevard 23, DK-2630 Taastrup (DK).

(81) Designated States: AE, AG, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, DZ, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.




G00001

(54) Title: A PISTON AND A PISTON ROD FOR AN INTERNAL COMBUSTION ENGINE

(57) Abstract

The piston comprises a piston top (3) which, at a distance from the longitudinal centre axis of the piston, has an abutment surface (7) extending in the circumferential direction of the piston and being clamped against an abutment surface (9) of a piston rod (2). The abutment surface (7) of the piston top (3) comprises a first surface (11) which, in a radially cross-sectional view, extends in a straight line and forms an angle of between 2° and 88° with a normal plane to the longitudinal centre axis of the piston, and a secondary surface (12) which forms an angle of less than 178° or more than 182° with the first surface (11).

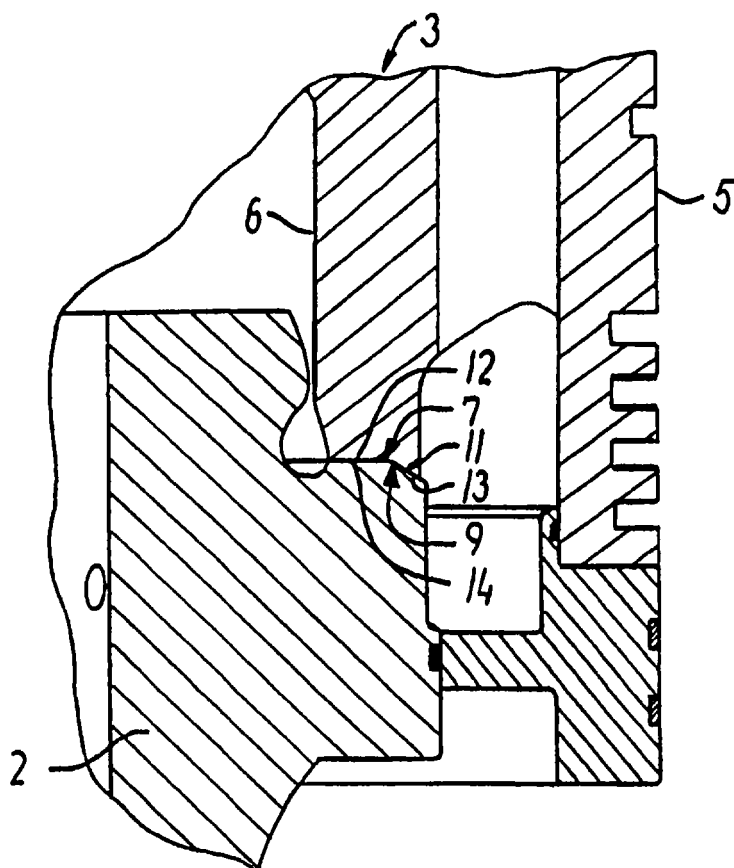

162162