

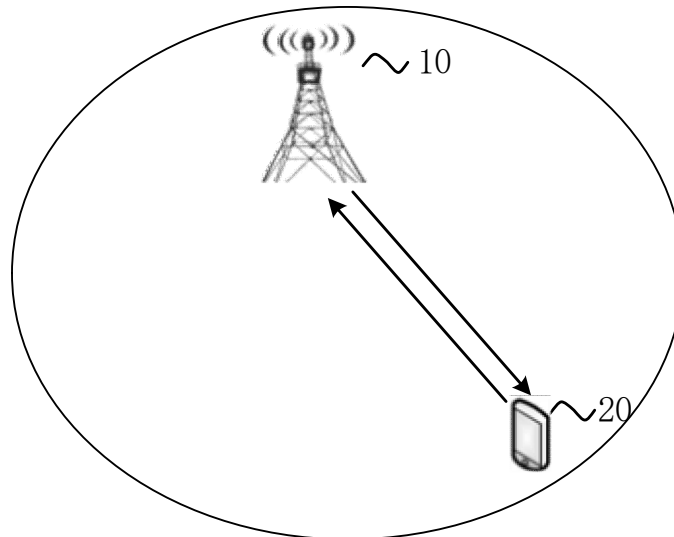


FIG. 1

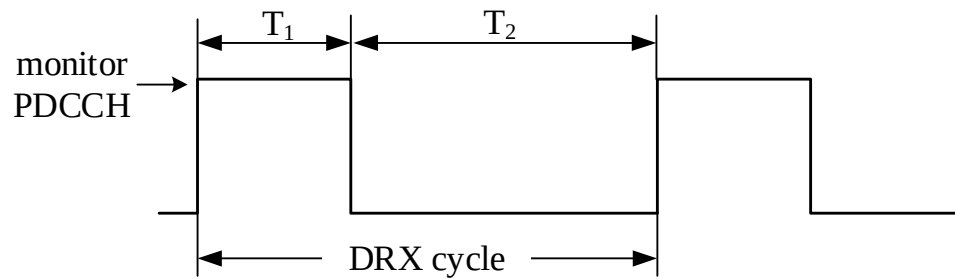


FIG. 2

300

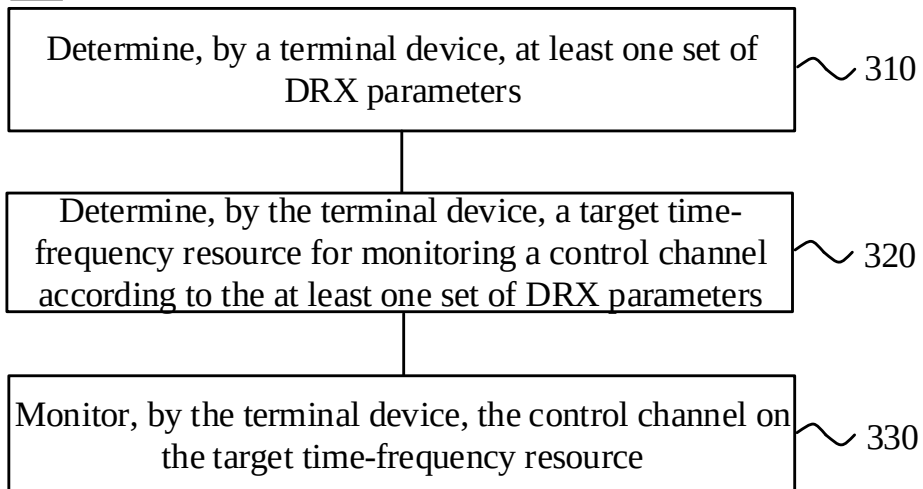


FIG. 3

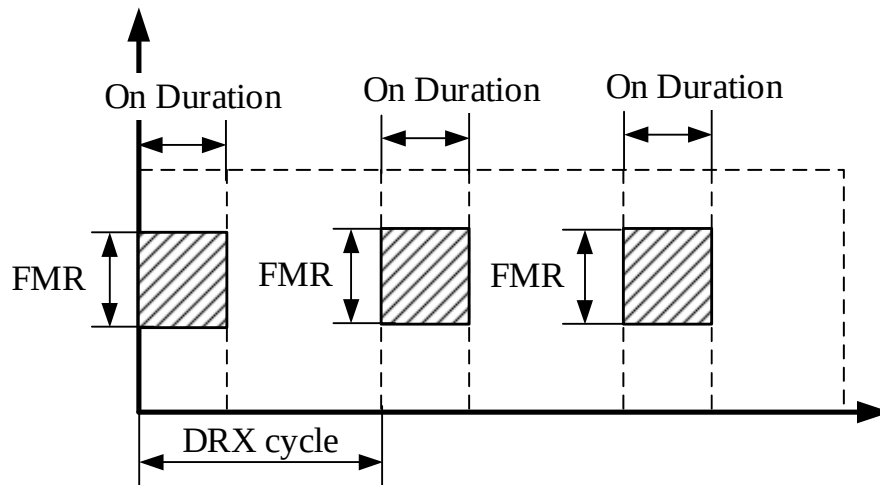


FIG. 4

300

Determine, by the terminal device, at least one time-frequency resource set for monitoring the control channel according to the at least one set of DRX parameters, wherein the at least one set of DRX parameters correspond to the at least one time-frequency resource set one to one

321

Determine, by the terminal device, the target time-frequency resource according to the at least one time-frequency resource set, wherein the target time-frequency resource includes the at least one time-frequency resource set

322

FIG. 5

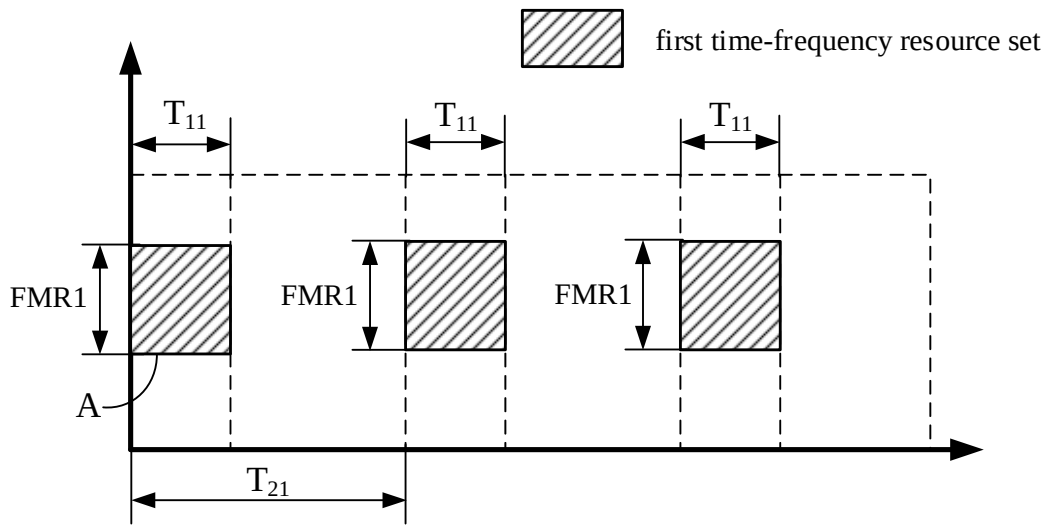


FIG. 6(a)

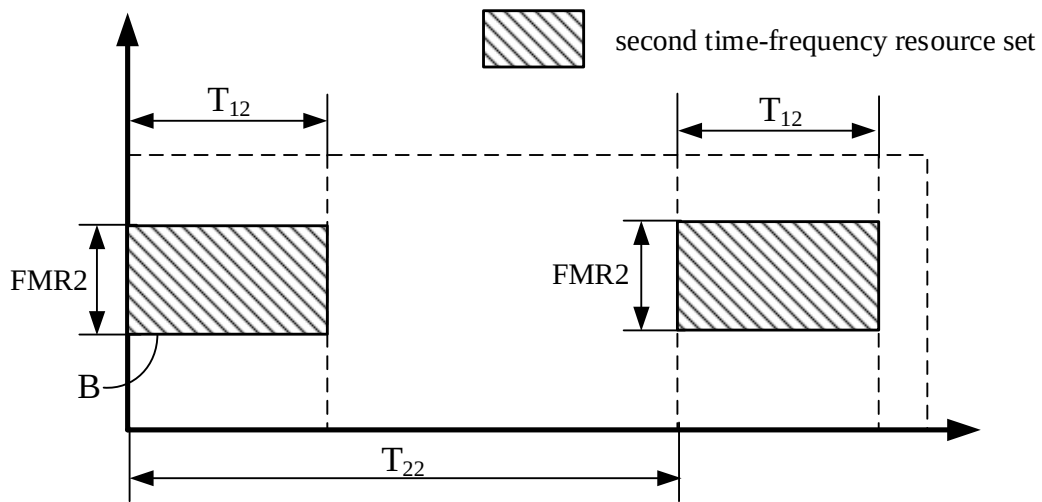


FIG. 6(b)

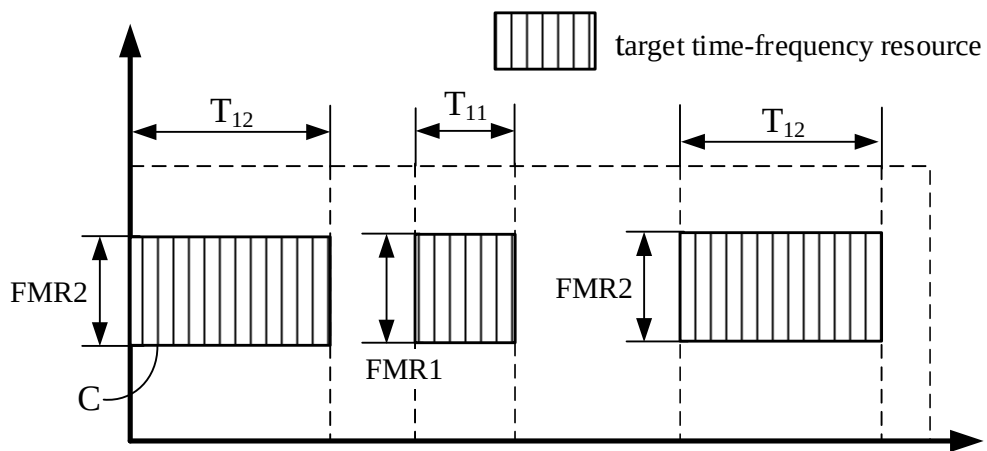


FIG. 6(c)

4/7

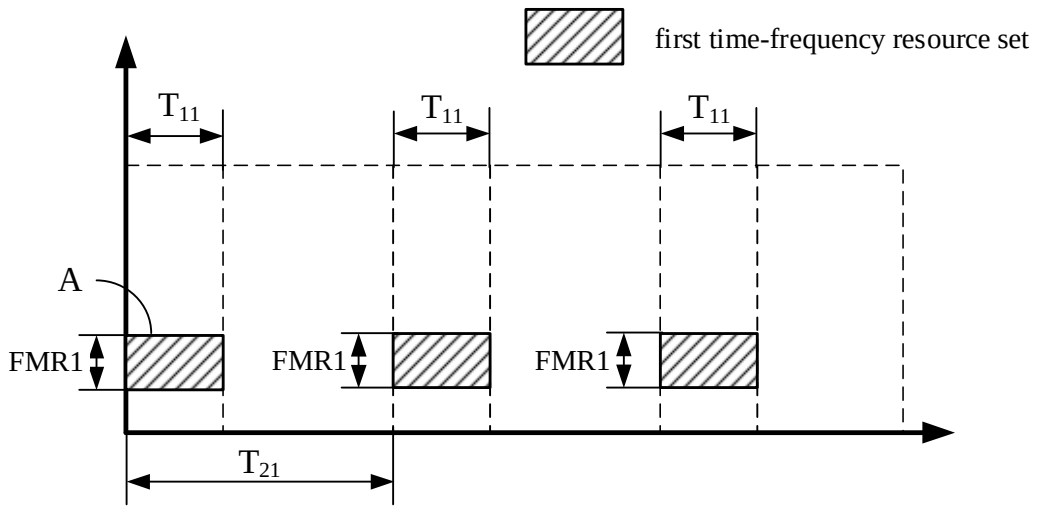


FIG. 7(a)

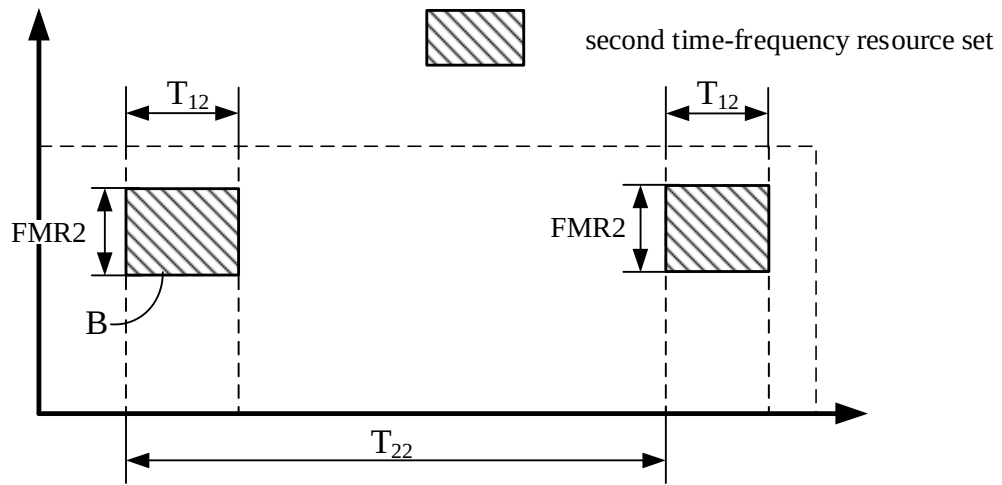


FIG. 7(b)

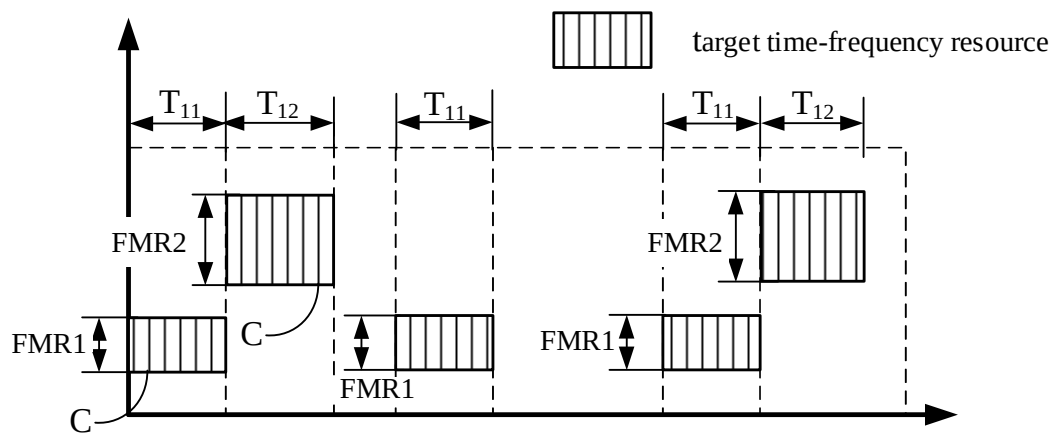


FIG. 7(c)

5/7

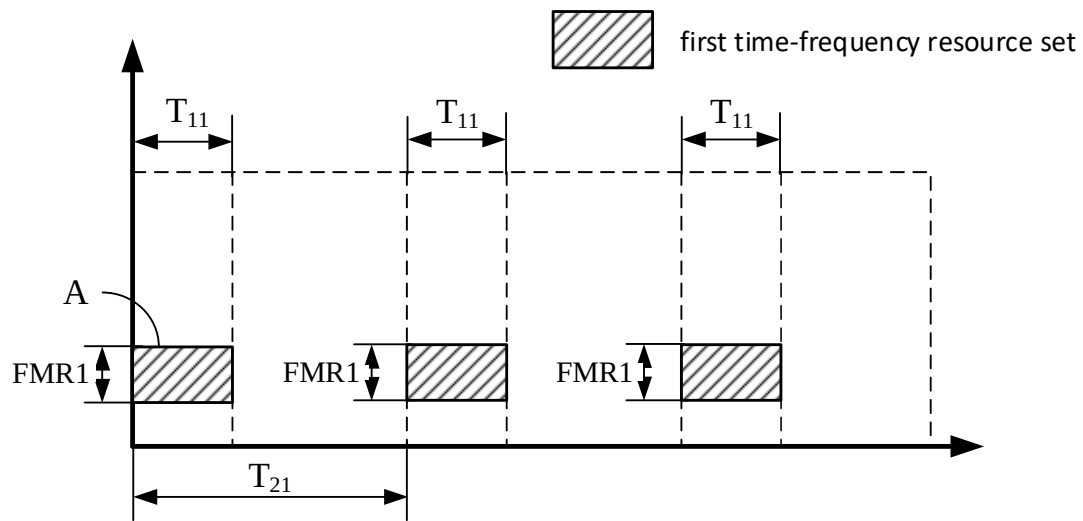


FIG. 8(a)

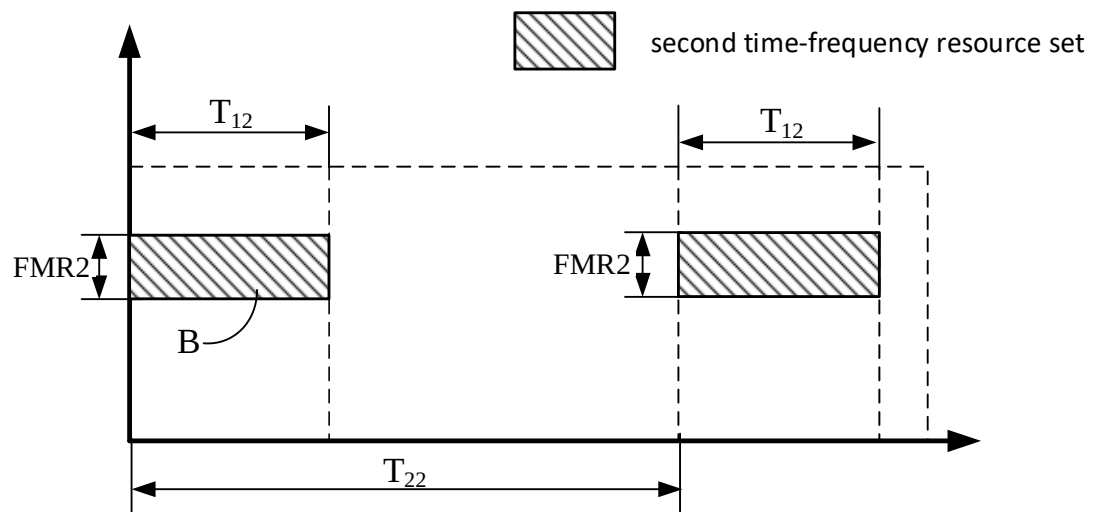


FIG. 8(b)

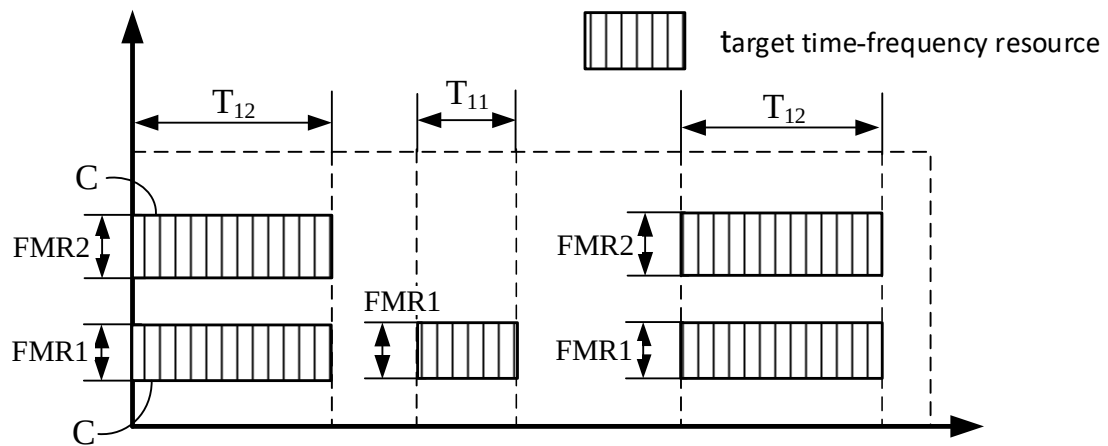


FIG. 8(c)

900

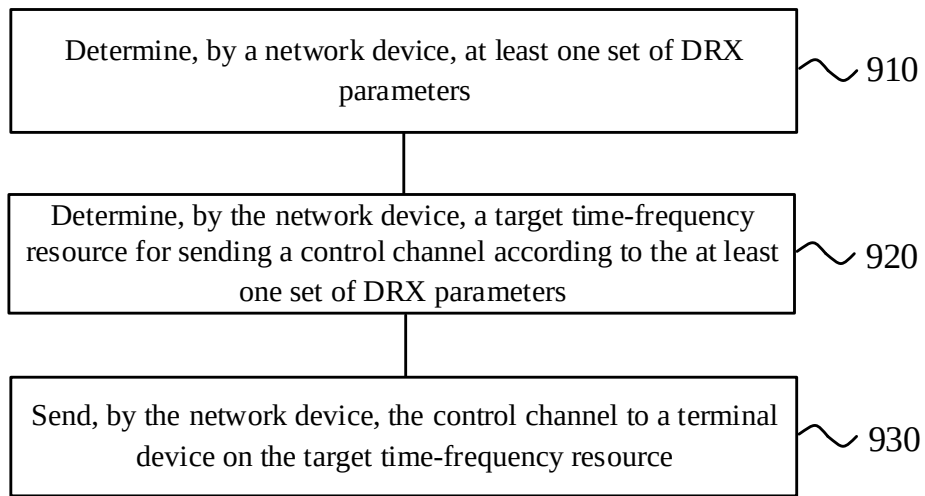


FIG. 9

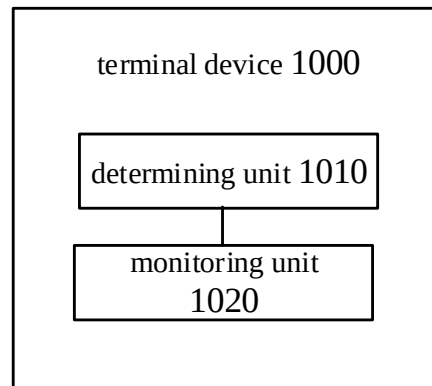


FIG. 10

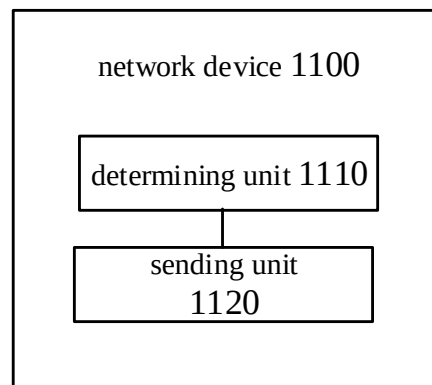


FIG. 11

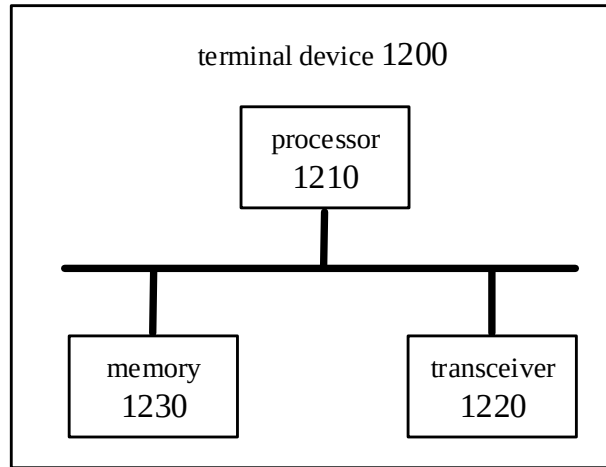


FIG. 12

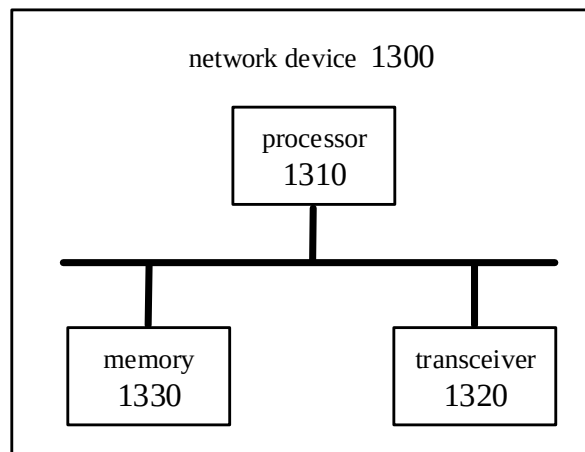


FIG. 13

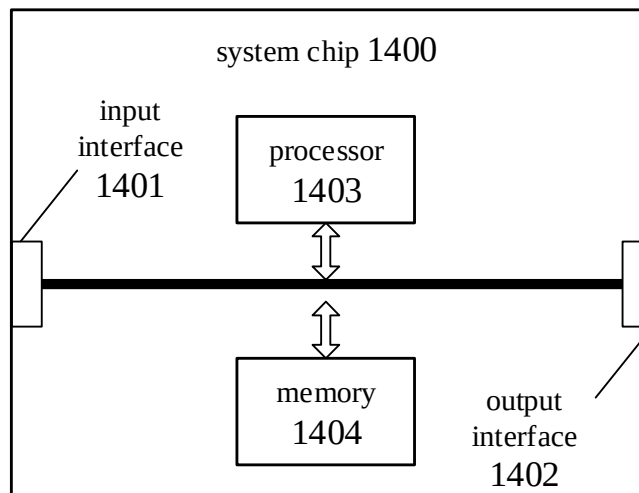


FIG. 14