(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
3 June 2011 (03.06.2011)

PCT

(10) International Publication Number
WO 2011/064738 A2

(51) **International Patent Classification**:
A61M 39/26 (2006.01)

(21) **International Application Number**:
PCT/IB2010/055430

(22) **International Filing Date**:
25 November 2010 (25.11.2010)

(25) **Filing Language**: Italian

(26) **Publication Language**: English

(30) **Priority Data**:
TO2009A000921 26 November 2009 (26.11.2009) IT

(71) **Applicant** *(for all designated States except US)*: **INDUSTRIE BORLA S.P.A.** [IT/IT]; Via G. Di Vittorio, 7bis, I-10024 Moncalieri (Torino) (IT).

(72) **Inventor; and**
(75) **Inventor/Applicant** *(for US only)*: **GUALA, Gianni** [IT/IT]; Strada Villa Zanetti, 28/18, I-10133 Torino (IT).

(74) **Agent**: **BUZZI, Franco**; Via Maria Vittoria, 18, I-10123 Torino (IT).

(81) **Designated States** *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

WO 2011/064738 A2

(54) **Title**: VALVED MALE LUER CONNECTOR

FIG. 2

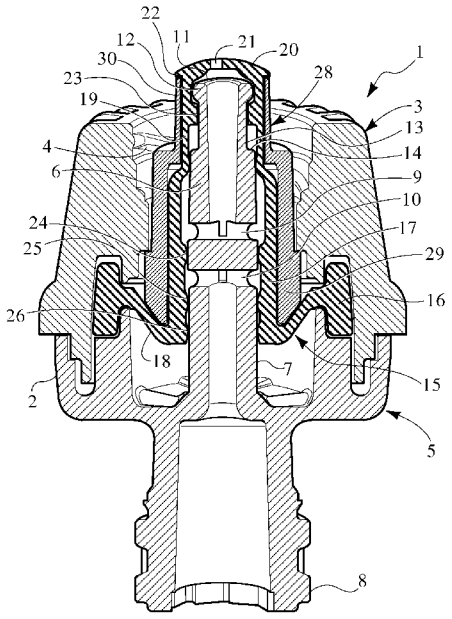

(57) **Abstract**: Valved male luer connector including a resilient hollow element (15) enclosing a tubular member (5) having an inlet portion (6) and an outlet portion (7). A collar (28) is axially displaceable to cause a stretching deformation of the resilient hollow element (15) so as to open a cut (21) of the terminal wall (20) thereof adjacent to the initial end (11) of the inlet portion (6) of the tubular member (5). The collar (28) has a containment axial appendage (30) of the resilient hollow element (15) up to close to the terminal wall (20) thereof, and a stop means (14) for limiting the stretching deformation of the resilient hollow element (15) is provided for in the zone (19) close to the terminal wall (20) thereof.