



(51) International Patent Classification:
F41A 9/00 (2006.01)

(21) International Application Number:
PCT/US2014/042793

(22) International Filing Date:
17 June 2014 (17.06.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/868,427 21 August 2013 (21.08.2013) US

(71) Applicant: COLT 'S MANUFACTURING COMPANY
LLC [US/US]; 547 New Park Avenue, West Hartford,
Connecticut 06110 (US).

(72) Inventors: HOCHSTRATE, Paul M.; 65 Maxwell Drive,
Plantsville, Connecticut 06479 (US). LANGEVIN, Kevin
Richard; 35 Harris Street, Berlin, Connecticut 06037
(US).

(74) Agent: BOEHM, Christopher C.; Cantor Colburn LLP,
20 Church St., 22nd Floor, Hartford, Connecticut 06103
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: FIREARM

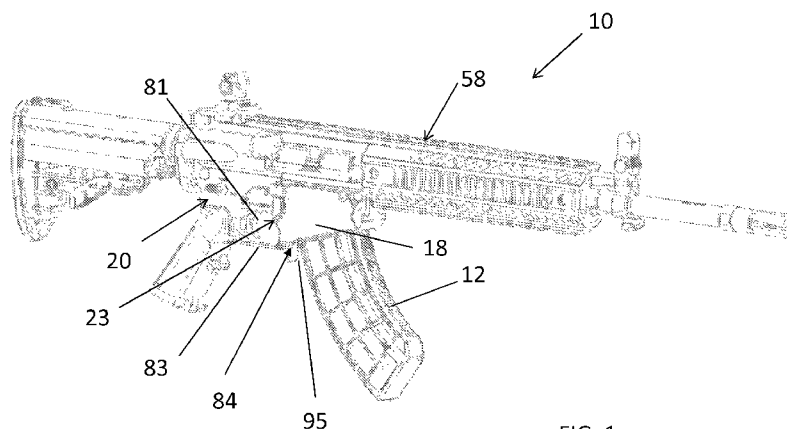


FIG. 1

(57) Abstract: A rifle configured for firing a 7.62 x 39 mm round is provided. The rifle having: an upper receiver (58); a lower receiver (20), the upper receiver (58) being removably secured to the lower receiver (20), wherein the lower receiver (20) is configured to removably receive and secure a magazine (12) therein, the magazine being configured to hold at least 30 rounds of a 7.62 x 39 mm ammunition; and wherein a magazine well (18) of the lower receiver (20) is configured to receive an adapter (40) at a front (42) of the lower receiver (20).

